
i-LUMINOSITY
LED LIGHTING FIXTURES


Date: _____
Project: _____
Price: _____

Apache LED Slim Panel

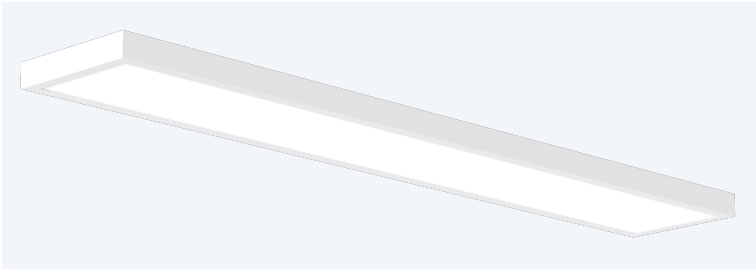

Description


The Apache LED Slim Panel Light features a sleek, elegant design with selectable wattage and color temperature (CCT) to meet various lighting needs. Its special design ensures quick and easy installation.

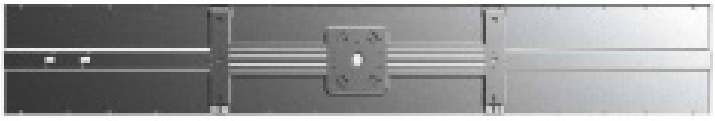


Features



Input Power: 120-277VAC
Wattage: 22W, 30W, 20/30/40W Selectable
Lumens: 110LM/W
CCT: 2700K/3000K/3500K/4000K/5000K Selectable
Dimming: 2 in 1 Dimming
(Triac in 120VAC/0-10V in 277VAC)
CRI: >90
L70 Lifetime: >50,000 hours
Warranty: 7 years
Thickness: 1.04" inch
Mounting : Surface Mount or Recessed



3 Wattage
Selectable



5 CCT
Selectable

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com

i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Ordering Key


ILPLAPHO _____ _____ _____ CCT _____ _____ _____


SERIES NUMBER	LENGTH	WIDTH	WATTS	CCT	DIMMING	MOUNTING OPTION
ILPLAPHO	**2 -** 2 ft	**S -** 4 inch	**22W** - 22W	**CCT -**	**TD** - Triac Dimming	**SM** - Surface Mount
	3 - 3ft	**M** - 6 inch	**30W** - 30W	2700K	**DM** - 0-10V Dimming*	**RM** - Recessed Mount
	4 - 4ft	**L** - 12 inch	**WT** - 20/30/40W Selectable	3000K	*0-10V Dim only for wattage selectable	**RG** - Recessed in Gird Ceiling
				3500K		**RD** - Recessed in Drywall
				4000K		
				5000K		
				Selectable		


Sample Item Number: ILPLAPHO 2 M 22W CCT TD SM


Dimensions

Unit: **Inch**



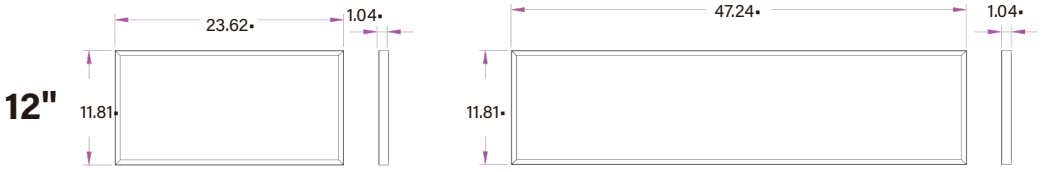






(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com


i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____


Product Explosive View

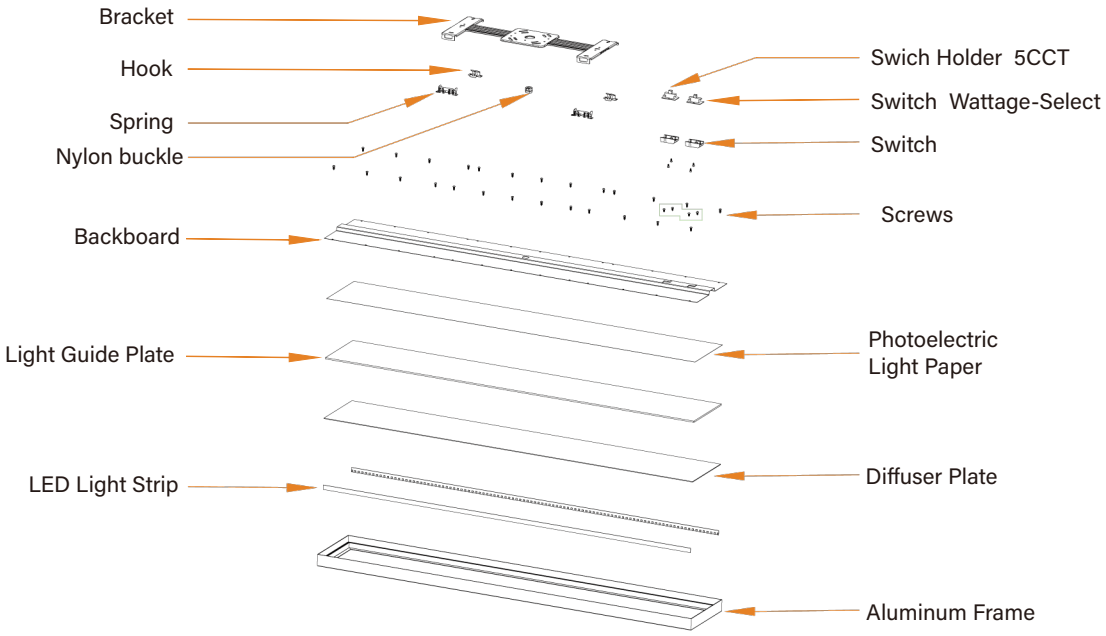

Easy Installation




Step 1: Buckle

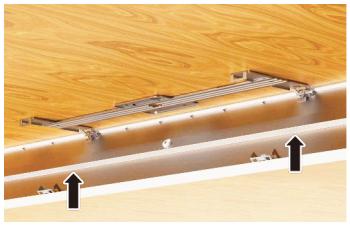

Step 2: Push

Unstallation




Step 1: Push

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com

i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Recessed in T Grid Ceiling

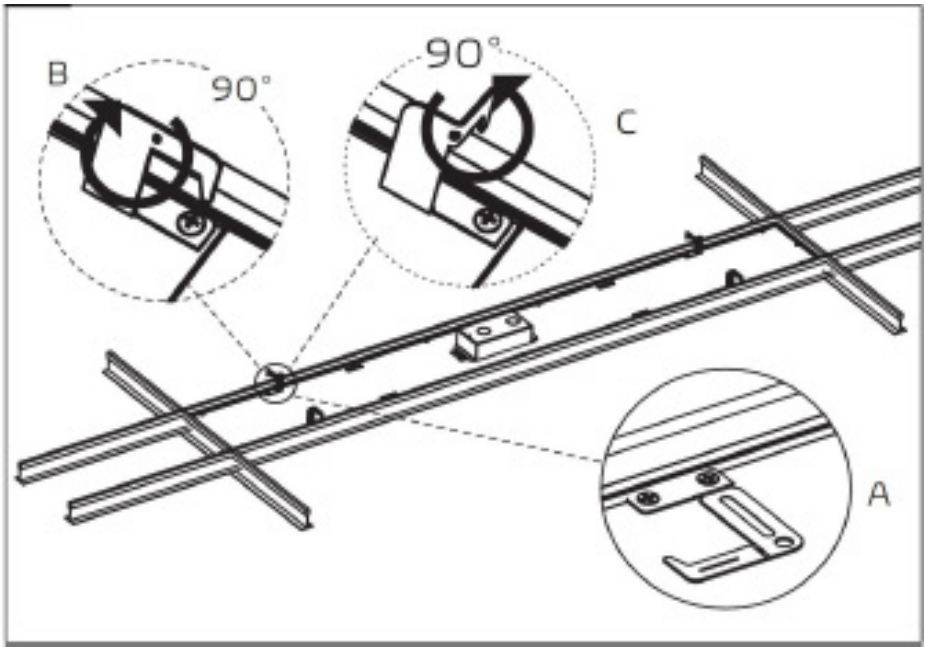

Recessed In Drywall With Flange Kits



(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com