Installation Guide

IMPORTANT SAFETY INFORMATION

1. WARNING : RISK OF SHOCK House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to :


A : Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
B : Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
C : Double-check all connections to be sure they are tight and correct.
D : Wear rubber soled shoes and work on a sturdy wooden ladder.

2. This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
3. WARNING : RISK OF CUTS Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.
4. Account for small parts and destroy packing material, as these may be hazardous to children.


Product Specification

Size	Wattage (W)	Voltage (V)	Rated Input Frequency (Hz)	Dimension (DxH)
4"*2'	22W	120-277Vac	50/60HZ	100*607*26.5mm
4"*3'	20W/25W/30W			100*900*26.5mm
4"*4'	20W/30W/40W			100*1213*26.5mm
6"*2'	22W			150*607*26.5mm
6"*3'	20W/25W/30W			150*900*26.5mm
6"*4'	20W/30W/40W			150*1213*26.5mm
1'*2'	22W			300*607*26.5mm
1'*3'	20W/25W/30W			300*900*26.5mm
1'*4'	20W/30W/40W			300*1213*26.5mm
2'*2'	20W/30W/40W			607*607*26.5mm


Installation Diagram




STEP 1:Turn off the power supply. Push one side of the bracket horizontally to take out the bracket from the fxture. Positon bracket in place over the J-Box Mark the 4 mounting holes for the anchors on the ceiling using the bracket as a reference . Drill holes mount provided anchors, then secure screws into anchors.Attach the bracket to juncton box by using the 2 screws provided.




STEP 2:Clip on and lock the safety cable of the fxture to the bracket.




STEP 3:Lift the fixture up to the ceiling,one side of the fixture has hooks, lock on the hooks on the fixture to the bracket.




STEP 4:Connect power wire of the fixture to the power wire from Junction box.



STEP 5:Push the liqht fixture up into the direction shown in this picture, the spring clips will automatically lock the bracket.




STEP 6:Slide the fixture left to center into the direction shown in this picutre.




STEP 7:Inspect to ensure the light fixture is well installed.Turn on power after installation is completed.


Uninstallation Diagram

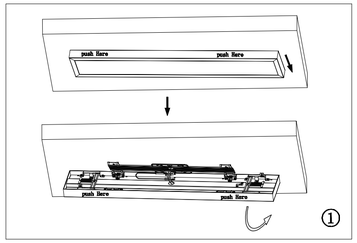


STEP 1:Turn off the power supply. Push the fixture horizontally into the direction shown in this picture and one side of the fixture will automatically unlock.




STEP 2:Disconnect power wire of the fixture to the power wire from Junction box.

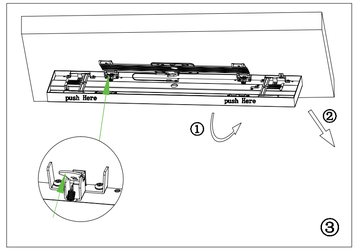

STEP 3:On the other side of the fixture, there are two spring clips. Lift the spring tabs upward to unlock the fixture.

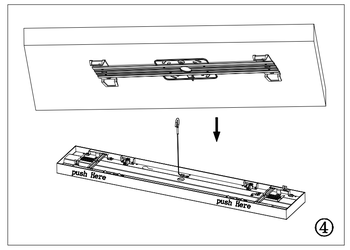

STEP 4:Detach the safety cable and remove the fixture.

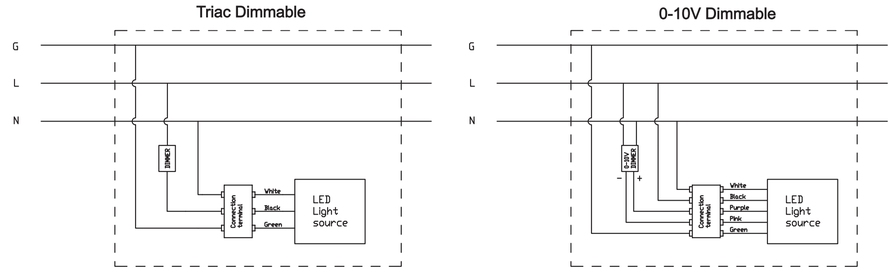

Caution

1. WARNING : Risk of fire. Use AC120-277 50/60Hz circuits.
2. Suitable for damp locations. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in a accordance with local and National Electrical Code(NEC) standards. Reliable operating temperature is -20 to +40 degrees Celsius(-4 to +104 degrees Fahrenheit).
3. pls obey fire prevention regulations, do not cover the fixture with any heat insulated materials.
4. Do not change the LED light source or driver inside under any circumstance.

Warranty:
5 years warranty

This product is for indoor use only

Dimmable

For use with dimmers

homi 泉美 LIGHTING	AL15 说明书	
	材质	80g书纸
	尺寸	A3
	工艺	四色双面印刷
	刀线	
	折线	
	备注	对折4次
	制图	袁敏洁 2024.12.27