i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Belvedere Ring Chandelier




Description:

Our Belvedere Rind Chandelier is elegant and simple. It comes beautiful finishes: black, white, gold, bronze or silver. It's available as single rings, double tiered or 3-tiered pendant.

Features:

- **Input Power:** AC 110V -120V
- **Light Options:** Down or up/down light
- **Shape:** Round
- **Material:** Aluminum
- **Mounting:** Suspended
- **Lumen Output:** 75 LM/W
- **CCT Options:** 3000K - 6500K
- **Finish Options:** Black, Bronze, Gold, Silver or White
- **Ring Options:** Single, double, triple
  Suspension height of rings can be adjusted, offering different views
- **Beam Angle:** 120°
- **CRI >90**
- **L70 Lifetime:** >50,000 hours
- **7 Year Warranty**



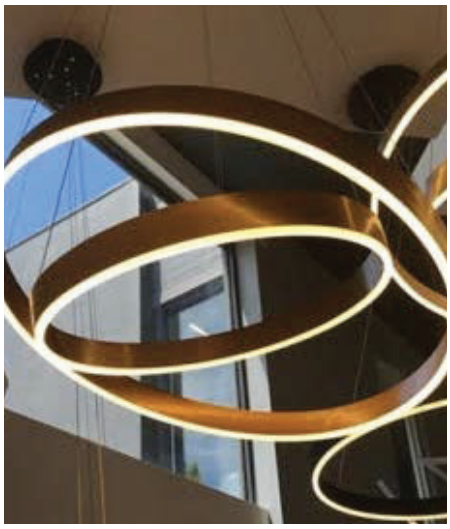



Applications:


- **Offices**
- **Conference Rooms**
- **Residential**
- **Galleries**
- **Lobbies**
- **Retail Locations**

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com


i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Dimensions:

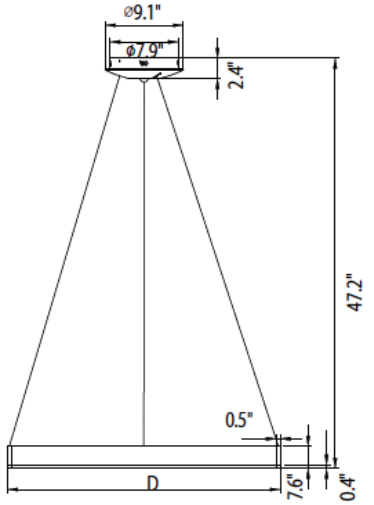

SINGLE TIERED

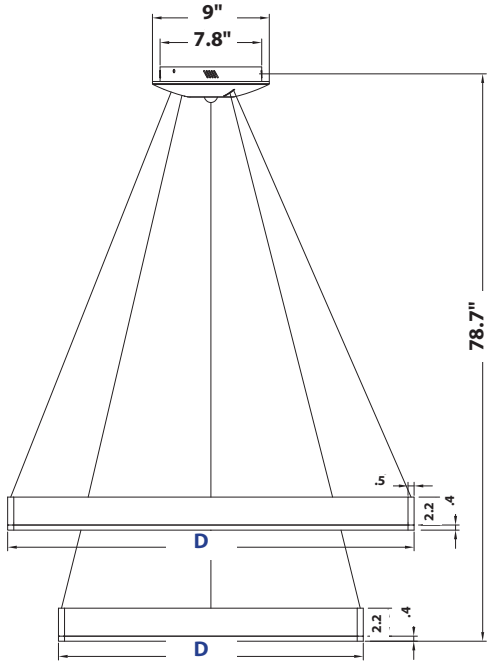

DOUBLE TIERED

Ring Diameter & Wattage Options:

TIERED	D (DIAMETER)	WATTAGE	
		Down Light	Up/Down Light
1 TIERED	15.7"	28W	56W
	23.6"	38W	80W
	31.5"	46W	96W
	39.4"	55W	110W
	47.2"	70W	140W
	59.1"	80W	160W
2 TIERED	15.7" + 23.6"	65W	
	23.6" + 31.5"	85W	
3 TIERED	15.7" + 23.6" + 31.5"	115W	

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com

i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Down Light Ordering Key

ILPDBDDL

SERIES NUMBER	TIER	WATTAGE / LUMENS	CCT	FINISH	DIMMABLE
ILPDBDDL	1T - 1 TIERED	16R28W – 28W / 2100LM	3K-3000K	B-BLACK	DM - 0-10V DIMMING
		24R38W – 38W / 2850LM	4K-4000K	G-GOLD	
		32R46W – 46W / 3450LM	5K-5000K	R - BRONZE	
		40R55W – 55W / 4125LM	6K-6000K	S - SILVER	
		50R70W – 70W / 5250LM	65K-6500K	W - WHITE	
		60R80W – 80W / 6000LM			
	2T- 2 TIERED	12R65W – 65W / 4880LM			
		23R85W – 85W / 6380LM			
	3T - 3 TIERED	115W – 115W / 8625LM			

SAMPLE ITEM NUMBER: ILPDBDDL 1T 16R28W 4K B DM

Up/Down Light Ordering Key

ILPDBUDL

SERIES NUMBER	TIER	WATTAGE / LUMENS	CCT	FINISH	DIMMABLE
ILPDBUDL	1T - 1 TIERED	16R56W – 56W / 4200LM	3K-3000K	B-BLACK	DM - 0-10V DIMMING
		24R80W – 80W / 6000LM	4K-4000K	G-GOLD	
		32R96W – 96W / 7200LM	5K-5000K	R - BRONZE	
		40R110W – 110W / 8250LM	6K-6000K	S - SILVER	
		50R140W – 140W / 10500LM	65K-6500K	W - WHITE	
		60R160W – 160W / 12000LM			

SAMPLE ITEM NUMBER: ILPDBUDL 1T 16R56W 4K B DM

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com