

LINEAR PROFILE

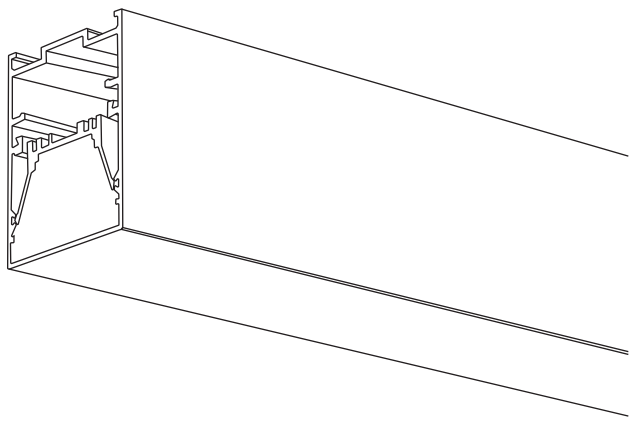


USER MANUAL

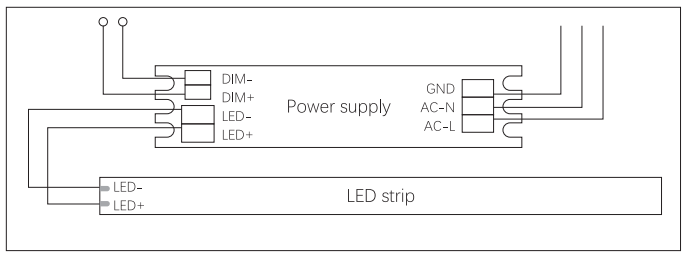


Note:


1. Read manuals attentively before installation.
2. Install by qualified electrician, be aware of antistatic factors.
3. Do not electrify it while instllation is ongoing.
4. Cut off electricity while installing or removing.
5. Operating temperature: -20℃ ~ +45℃.
6. Application space is with no chemical compositions such as sulphur, acid, halogen etc.

1、Pendant

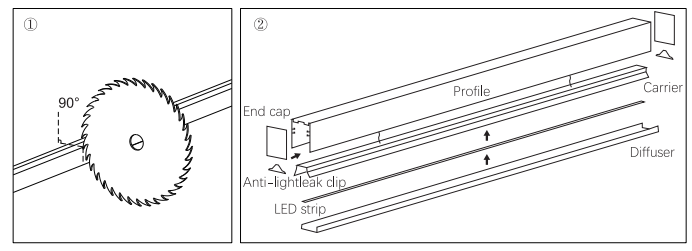

1. Cut it as per demand.
2. Assemble as per diagram: Stick LED strip onto carrier → Assemble safety cords between profile and carrier → Press carrier into main profile → Assemble diffuser → Assemble end caps → Insert anti-lightleak clips.

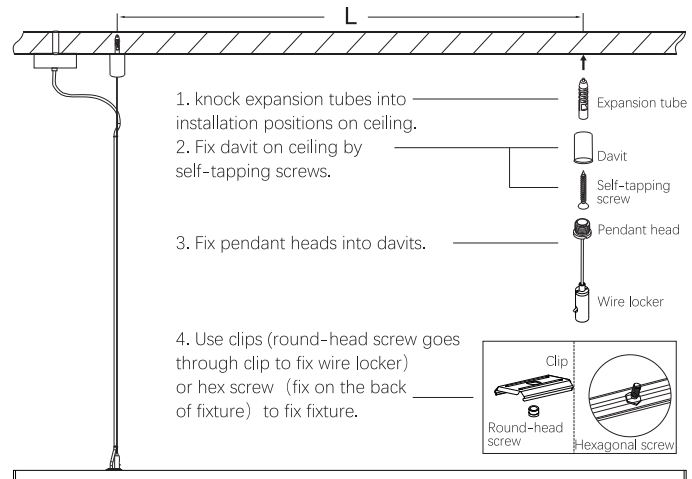


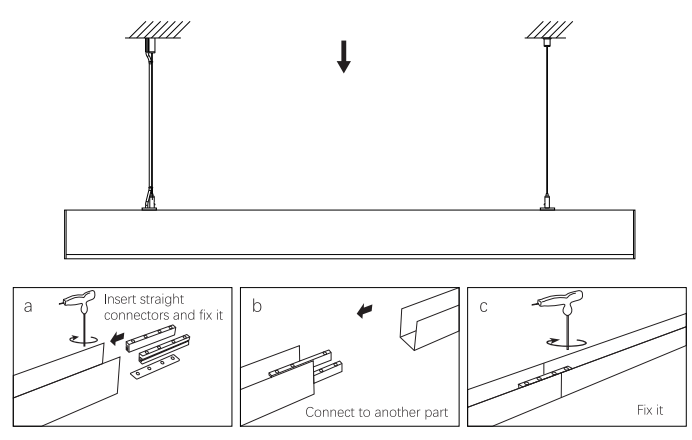


Remark:

Fixture	1230mm	1839mm	2449mm
L	995mm±10mm	1340mm±10mm	1950mm±10mm


2、Ceiling mounted

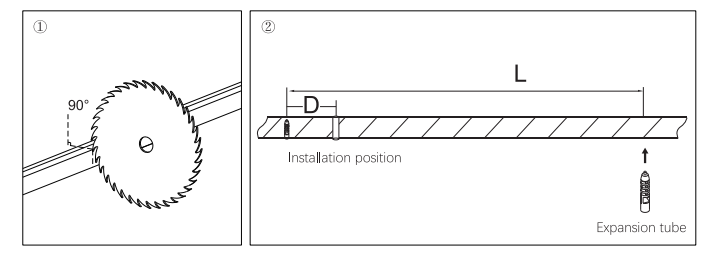

1. Cut it as per demand.
2. Knock expansion tubes into installation positions on ceiling.

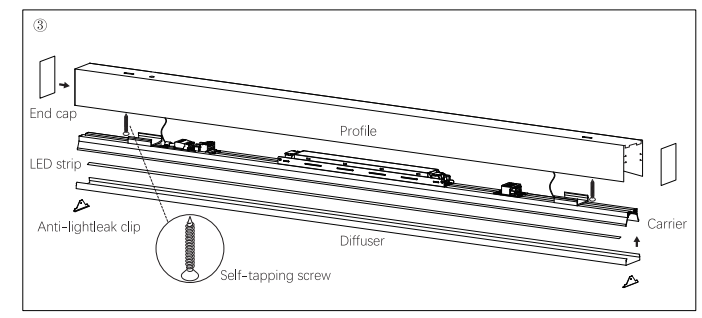


3. Assemble as per diagram: Stick LED strip onto carrier → Assemble safety cords between profile and carrier → Press carrier into main profile → Assemble diffuser → Assemble end caps → Insert anti-lightleak clips.

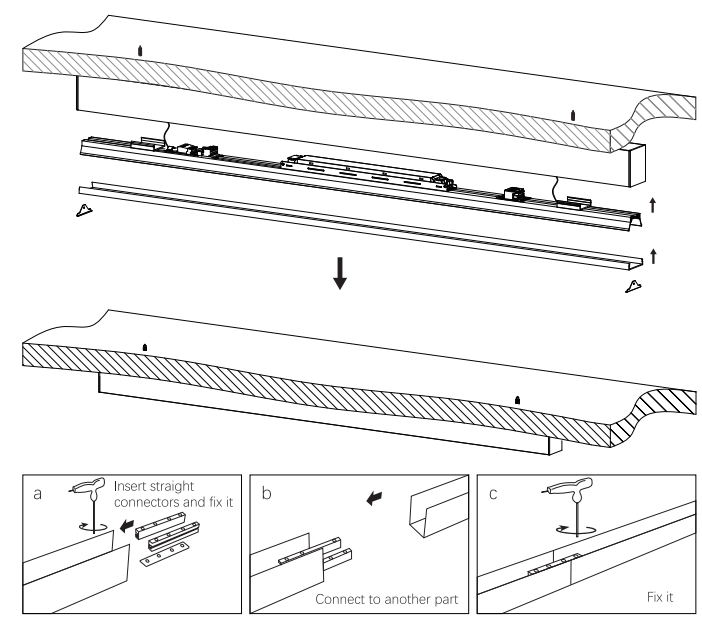


Remark:

Fixture	1230mm	1839mm	2449mm
L	1025mm±5mm	1435mm±5mm	2045mm±5mm
D	50mm ±5mm (φ10mm)		


3、Wall mounted

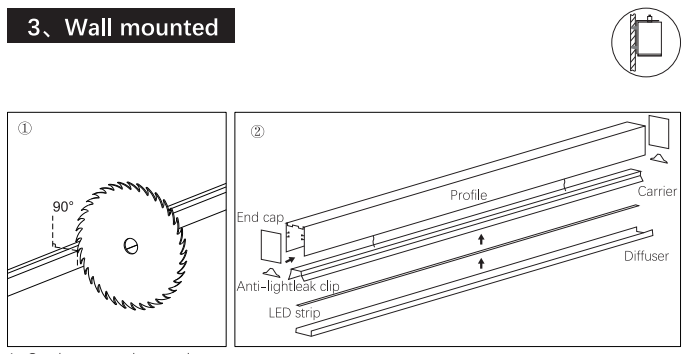


1. Cut it as per demand.
2. Assemble as per diagram: Stick LED strip onto carrier → Assemble safety cords between profile and carrier → Press carrier into main profile → Assemble diffuser → Assemble end caps → Insert anti-lightleak clips.

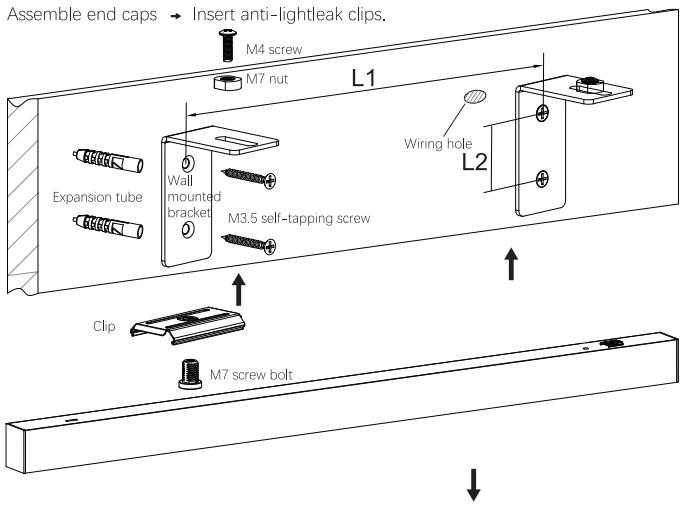

3. Knock expansion tubes into installation positions on ceiling.
4. Use M3.5 self-tapping screw to fix wall mounted bracket onto wall.
5. Put M7 screw bolt into clip and then press clip onto the back of profile.
6. Fix fixture by M4 screw and M7 nut as per diagram.

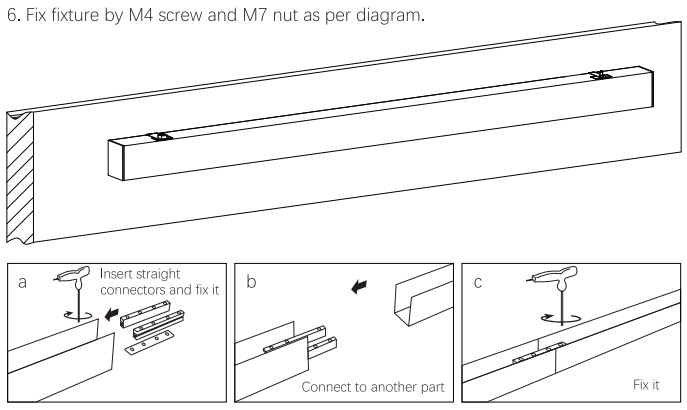


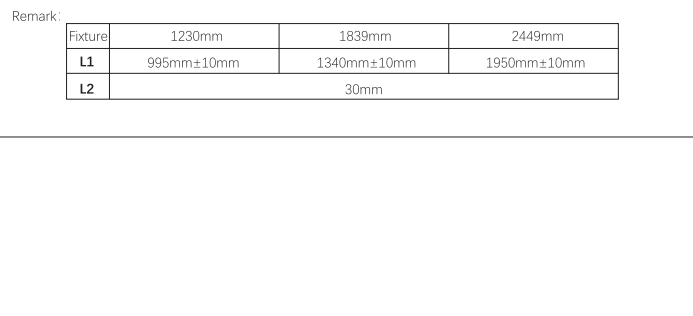


Remark:

Fixture	1230mm	1839mm	2449mm
L1	995mm±10mm	1340mm±10mm	1950mm±10mm
L2	30mm		


4、Rimless recessed

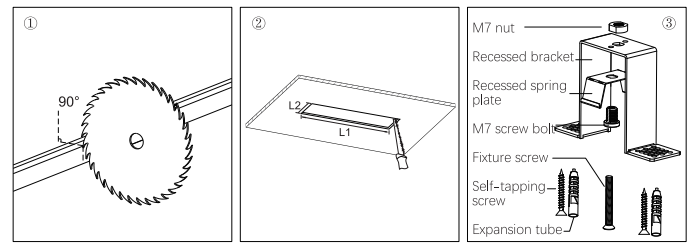


1. Cut it as per demand. 2. Make slot as per scale by "L".
3. Use M7 screw bolt to go through recessed spring plate, recessed bracket to fix with M7 nut as per diagram.

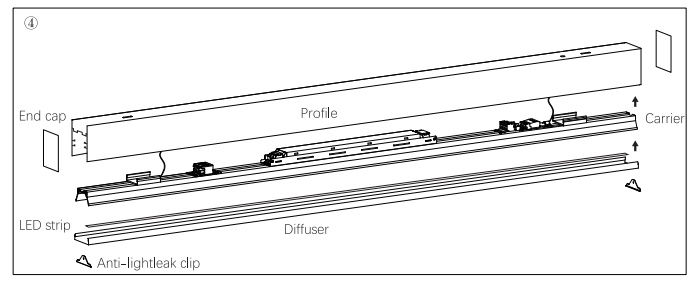


4. Stick LED strip onto carrier → Assemble safety cords between profile and carrier profile → Passes through slot.

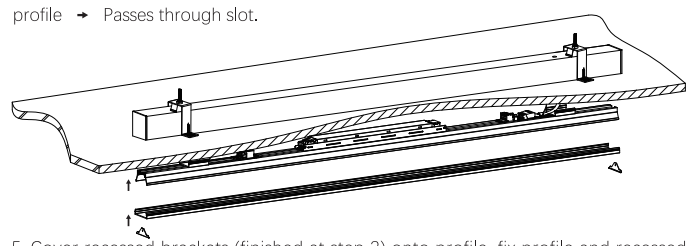

5. Cover recessed brackets (finished at step 3) onto profile, fix profile and recessed bracket by fixture screws and M7 nuts.
6. Knock expansion tubes into installtion positions of wings of recessed bracket, fix bracket by bracket screws.
7. Assemble carrier, diffuser and anti-lightleak clips.

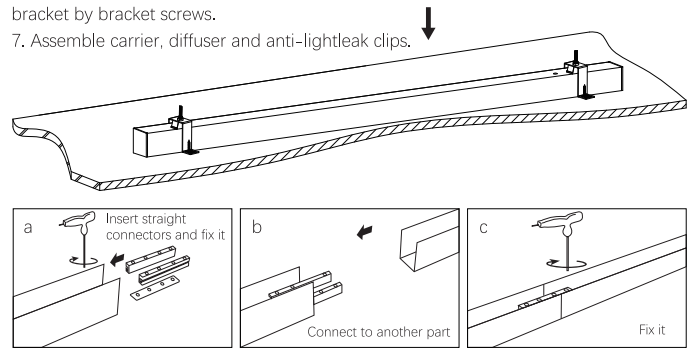


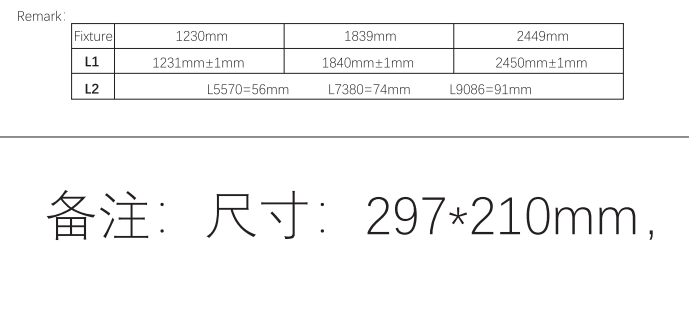


Remark:

Fixture	1230mm	1839mm	2449mm
L1	1231mm±1mm	1840mm±1mm	2450mm±1mm
L2	L5570=56mm	L7380=74mm	L9086=91mm


5、Rim recessed

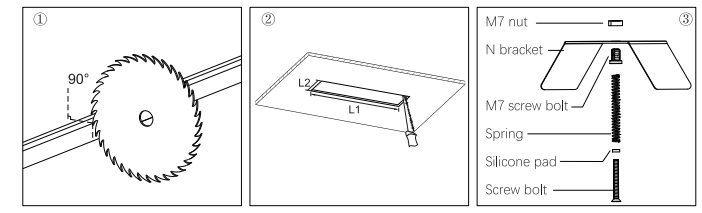


1. Cut it as per demand. 2. Make slot as per scale by "L".
3. Assemble spring, M7 screw bolt, N bracket, M7 nut as per diagram.

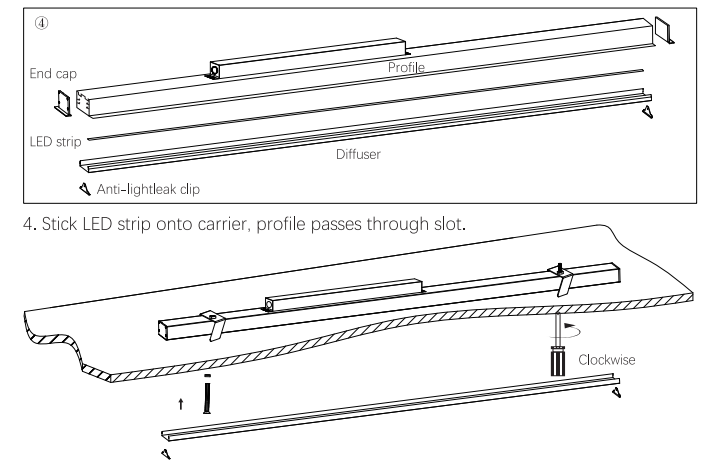

4. Stick LED strip onto carrier, profile passes through slot.
5. Cover N bracket (finished at step 3) onto profile, use screw bolt and silicone pad to go through fixture to fix with M7 nut as per diagram.
6. Use tool to revolve N bracket clockwise to let it clip on ceiling.
7. Assemble diffuser and anti-lightleak clips.

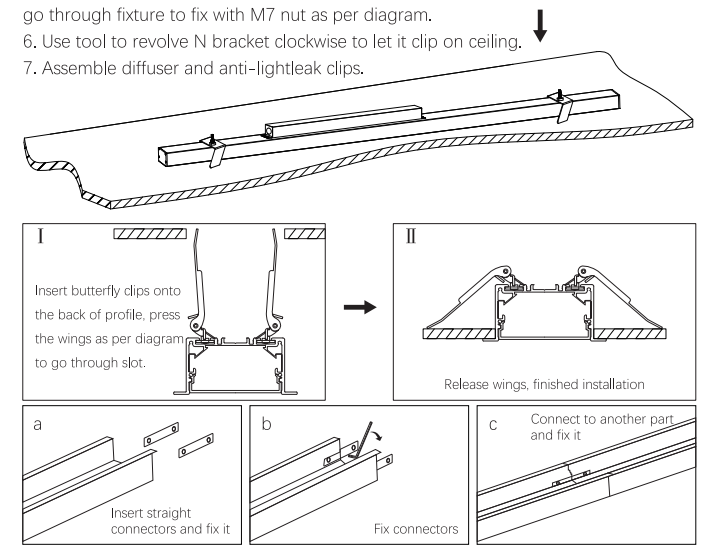

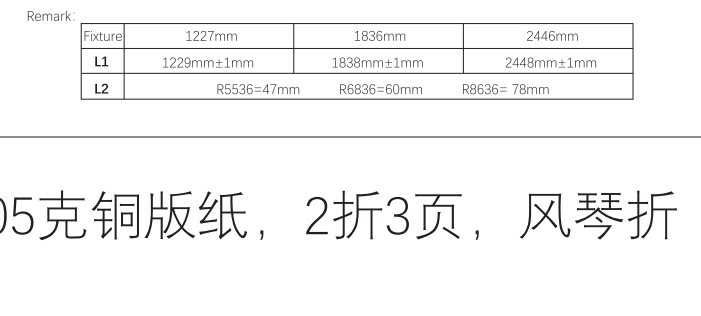

Remark:

Fixture	1227mm	1836mm	2446mm
L1	1229mm±1mm	1838mm±1mm	2448mm±1mm
L2	R5536=47mm	R6836=60mm	R8636= 78mm

备注：尺寸：297*210mm，105克铜版纸，2折3页，风琴折