

| | |
|----------|-------|
| Date: | _____ |
| Project: | _____ |
| Price: | _____ |

LED Belford Tube:

Description:

i-Luminosity's Belford Tube provide ample lighting or can be directed to a specific location. Available in 3000K, 3500K, 4000K, or 5000K. UL listed for damp locations, great for retrofits or standard fixtures.



Features:

- AC 120-277V
- Rated life: 50,000 hours
- CRI>90
- Available in 3000K, 3500K, 4000K, 5000K.
- Beam Angle: 120°
- Operating temperature: -20°F ~ 122°F
- 7 Year Warranty.

Dimensions:

15w: (L) 47.67IN x (D) .98 IN

Ordering Key:

| SERIES NUMBER | WATTS/ SIZE/ LUMENS | CCT | LENS | ADDITIONAL OPTIONS |
|---------------|---------------------|--|-------------|--------------------|
| ILTBBTSL | 15W - 4FT / 2,100 | 3K - 3000K 35 - 3500K 4K - 4000K 5K - 5000K | F - FROSTED | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

SAMPLE ITEM NUMBER: ILTBBTSL 15W 4K F



| | |
|----------|-------|
| Date: | _____ |
| Project: | _____ |
| Price: | _____ |

Installation Instructions:

1. Product Features:

- UL certified
- Plug-n-Play replacement
- Full glass housing: No Aging, Yellowing, Bending.
- Compatible with Instant Start, Program Start and Rapid Start T8 electronic Ballast;
Compatible with T8 emergency Ballast and dimmable Ballasts.

2. Product Applications:

Widely used in residential buildings, offices, shopping malls, supermarkets, hospitals, assembly lines, warehouses, etc. for energy saving illumination.

3. Installation Instructions:


Please completely comply with these instructions and notes, to ensure that the product is operated in a safe condition.

Safety Precautions:

- 1). WARNING: Risk of shock. Disconnect power before installation.
- 2). LED T8 lamp for use only with products described and installed in accordance with product specifications. LED T8 lamp to be operated with fluorescent electronic ballast.
- 3). WARNING: RISK OF FIRE, USE ONLY IN PLACE OF FLUORESCENT LAMPS SPECIFIED ON LABEL. RISK OF ELECTRIC SHOCK. SUITABLE FOR DAMP LOCATIONS.



INSTALLATION INSTRUCTIONS

1) Turn Power OFF




2) Remove lens or diffuser (if applicable)

3) Remove existing fluorescent lamps from the luminaire.




4) Bring LED lamp to luminaire and insert lamp pins into luminaire lamp holders.




5) Rotate LED lamp until lamp locks in place. Ensure that the LED lamp front points away from the back of the luminaire.

Note: install LED T8 replacement lamp one for each fluorescent lamp removed.



6) Place lens or diffuser back in place (if applicable)


7) Switch power ON.




| | |
|----------|-------|
| Date: | _____ |
| Project: | _____ |
| Price: | _____ |

Instant Start Ballast Wiring Diagram:

Two Lamp Ballast Correct Wiring

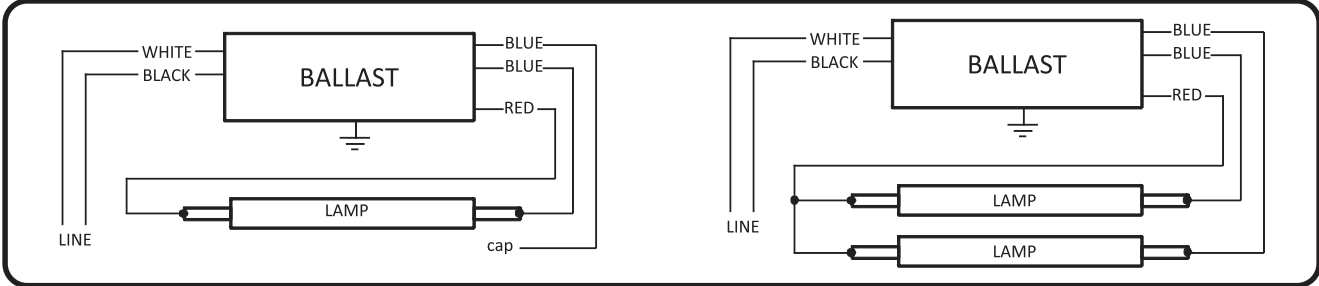

Three Lamp Ballast Correct Wiring

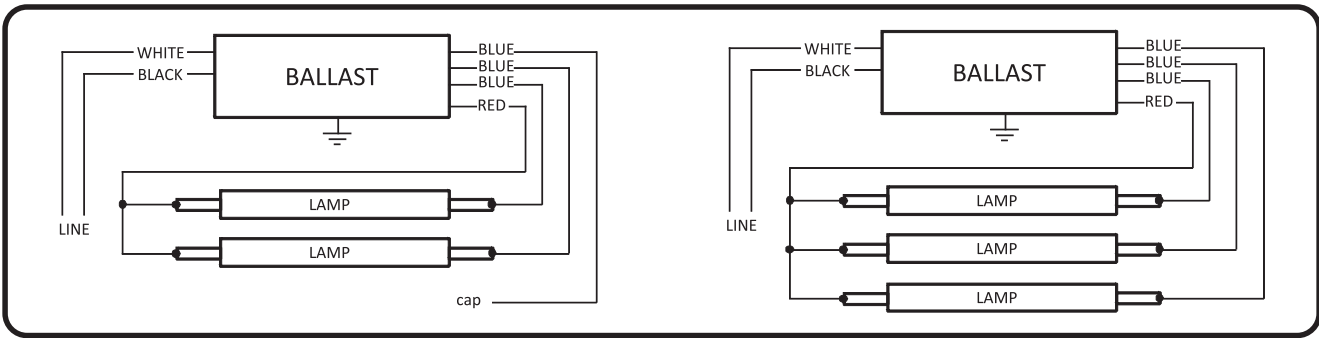

Four Lamp Ballast Correct Wiring

