i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Stellar LED Linear Light



Description:

Our Stellar LED Linear Light is flexible and can link to various shapes with a slim profile. Different IP rating options ensure it is available for use in complex environments.

Features:

- **Input Power:** Constant voltage DC 24V
- **Mounting Options:** Surface or Pendant
- **Dimmable:** 0-10V dimming, Triac dimming, and Smart dimming options
- **Lighting controls option available**
- **Beam Angle:** 120°
- **Emergency backup option available**
- **Linkable options available**
- **Housing Color:** White, silver or black aircraft aluminum
- **IP Rating:** IP20, IP55, IP65, IP66, or IP67 options
- **Diffuser:** Frosted
- **Profile Color Finish:** white, black, or silver options
- **L70 Lifetime:** >50,000 hours
- **Operating Temperature:** - 40°F to 104°F
- **7 Year Warranty**





Applications:

Offices, lobbies, conference rooms, residential and retail locations.

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com

i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____


LED Strip:

- **Power:** 5.27 W/FT
- **Voltage:** 24V DC
- **Lumens:** 712 LM/FT or 135 LM/W
- **Cutting:** 16.4 FT/Unit





Dimensions:

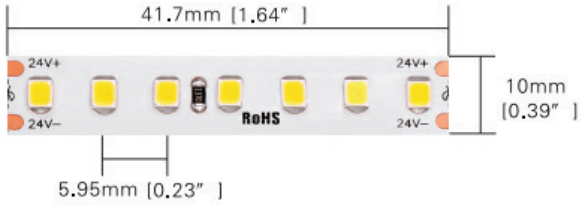





(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com


i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Linear Features:



Dimensions:



Accessories List


Class	Item Number	Description	Images
Mounting	ILBVLPTB-NPF-6Q	Suspension kit / 6ft / 1 hole / work with ILB-VLPTB-PF2-6Q together	
	ILBVLPTB-PF2-6Q	Suspension kit / 6ft / 2 holes / work with ILB-VLPTB-NPF-6Q together	
	ILBVL-SM	Surface mounting	
Connectors	ILBVR-180	180º extending connectors / 2pcs/set	
	ILBV-90L-CT	90º extending connector ' L ' shape	
	BV-90T-CT	90º extending connector ' T ' shape	
	ILBV-90X-CT	90º extending connector ' X ' shape	


(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com

i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Photometric:

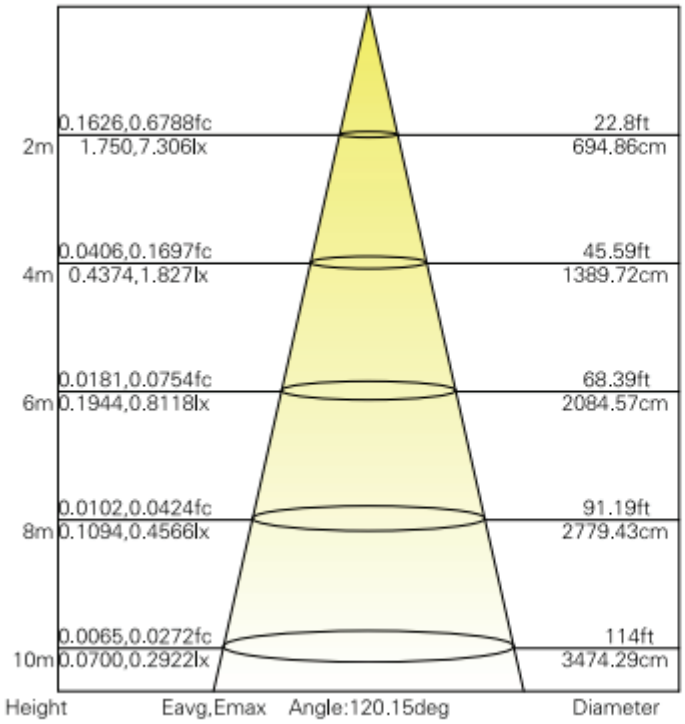

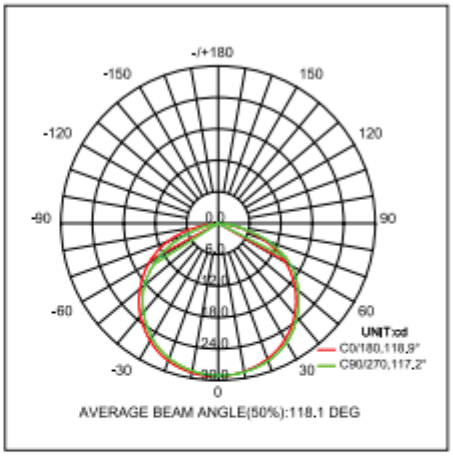

Ordering Key

SERIES NUMBER	LENGTH	WATTAGE / LUMEN	CCT	FINISH	DIMMABLE	MOUNTING	IP RATING	EMERGENCY	LINKABLE
ILLLSRBV	4 - 4 FT	21W - 21W / 2840LM	27K-2700K	B - BLACK	DM - 0-10V DIMMING	S - SURFACE	IP20	EM-EMERGENCY KIT	L-LINKABLE
			3K-3000K	S - SILVER	SD - SMART DIMMING	P - PENDANT	IP55		
	8 - 8 FT	42W - 42W / 5681LM	35K-3500K	W -WHITE	TD - TRIAC DIMMING		IP65		
			4K-4000K				IP66		
	X-CUSTOMIZED	XX - CUSTOMIZED	6K-6000K				IP67		

SAMPLE ITEM NUMBER: ILLLSRBV 4 21W 35K B DM P

(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com