Installation Instructions

120VAC Linkable LED Linear

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ **WARNING** - Risk of fire or electric shock. LED installation kit requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
⚠ **WARNING** - Risk of fire or electric shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and / or drawings and where the input rating does not exceed the input rating of the luminaire.
⚠ **WARNING** - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
⚠ **WARNING** - Deviation from the assembly instructions may result in a risk of fire or electric shock.

⚠ **WARNING** - This equipment is intended to be installed only by qualified personnel. The installation must be made in accordance with the current edition of the National Electric Code and all applicable state and local building codes. The final installation must be approved by the appropriate qualified electrical/building inspector(s). Improper installation may result in a fire or electrical hazard. For your safety, be sure the electrical power to the circuit has been disconnected before installing this electrical system.
⚠ **AVERTISSEMENT** - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite en conformité avec l'édition actuelle du Code national de l'électricité et toutes étatiques et locales codes du bâtiment applicables. L'installation finale doit être approuvée par l'inspecteur en électricité / bâtiment qualifié approprié(s). Une mauvaise installation peut entraîner un incendie ou un risque électrique. Pour votre sécurité, soyez sûr de la puissance électrique vers le circuit a été coupée avant l'installation de ce système électrique.

SUITABLE FOR UNDER-CABINET MOUNT

PRE-INSTALLATION:

Verify the measurement to install the luminaire in the intended application. Measurements should include space for the power supply cord.

Caution: Rated at 120VAC ONLY
Caution: Max number of connection for daisy chain


All the accessories except the LED module(Linear Fixture) shall be installed within specific Listed Convertible Undershelf or Under-Cabinet LED Portable Luminaires as below:


LED module(Linear Fixture) shall be installed within specific Listed Convertible Undershelf or Under-Cabinet LED Portable Luminaires as right:


Manufacture: Zhongshan YIYA Lighting Technology Co Ltd (E489413)
Model no.: TX-LED-4W-XXXX, TX-LED-5W-XXXX, TX-LED-8W-XXXX, TX-LED-9W-XXXX, TX-LED-10W-XXXX, TX-LED-12W-XXXX, TX-LED-14W-XXXX, TX-LED-16W-XXXX, TX-LED-20W-XXXX, TX-LED-24W-XXXX, TXD-LED-4W-XXXX, TXD-LED-8W-XXXX, TXD-LED-12W-XXXX, TXD-LED-16W-XXXX, TXD-LED-13W-XXXX, TXD-LED-18W-XXXX


Model No. of LED Module	Model No. of LED Portable Luminaires Manufacture: Zhongshan YIYA Lighting Technology Co Ltd (E489413)	Wattage for one luminaire	MAX. # OF CONNECTION PER SIZE
TX-LED-4W-XXXX-A	TX-LED-4W-XXXX	4W	60
TX-LED-5W-XXXX-A	TX-LED-5W-XXXX	5W	48
TX-LED-8W-XXXX-A	TX-LED-8W-XXXX	8W	30
TX-LED-9W-XXXX-A	TX-LED-9W-XXXX	9W	26
TX-LED-10W-XXXX-A	TX-LED-10W-XXXX	10W	24
TX-LED-12W-XXXX-A	TX-LED-12W-XXXX	12W	20
TX-LED-14W-XXXX-A	TX-LED-14W-XXXX	14W	17
TX-LED-16W-XXXX-A	TX-LED-16W-XXXX	16W	15
TX-LED-20W-XXXX-A	TX-LED-20W-XXXX	20W	12
TX-LED-24W-XXXX-A	TX-LED-24W-XXXX	24W	10
TXD-LED-4W-XXXX-A	TXD-LED-4W-XXXX	4W	60
TXD-LED-8W-XXXX-A	TXD-LED-8W-XXXX	8W	30
TXD-LED-12W-XXXX-A	TXD-LED-12W-XXXX	12W	20
TXD-LED-16W-XXXX-A	TXD-LED-16W-XXXX	16W	15
TXD-LED-13W-XXXX-A	TXD-LED-13W-XXXX	13W	20
TXD-LED-18W-XXXX-A	TXD-LED-18W-XXXX	18W	15


ACCESSORIES


TXZ-LED-YW-XXXX-A


TX-MOUNTING CLIP


TX-JBOX


TX-COUPLER



TX-POWER CORD-X


TX-JUMPER CABLE-X


1 Secure the mounting clips by the screw (TX-MOUNTING CLIP). Install the mounting clips approximately 2" to 4" from the end of the linear fixture.



2 Mount the linear fixture (TXZ-LED-YW-XXXX-A) by snapping the linear fixture into the mounting clips.



3 To daisy chain each Linear Fixture, use coupler (TX-COUPLER) or jumper cable (TX-JUMPER CABLE-X).

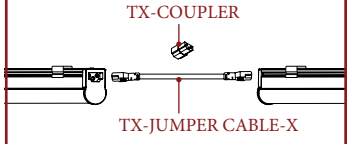

4 Connect power cord (TX-POWER CORD-X) to Linear Fixture to complete luminaire assembly. Turn on power to confirm luminaire is working properly.




Installation Instructions


120VAC Linkable LED Linear

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN


TX-JBOX PACKAGING CONTENTS




TX-JBOX



(2) Conduit Fittings




(8) M3x10 Screws




(3) Wire Nuts


1 Remove cover of TX-JBOX.




2 Remove knockout and attach the conduit fitting to TX-JBOX.

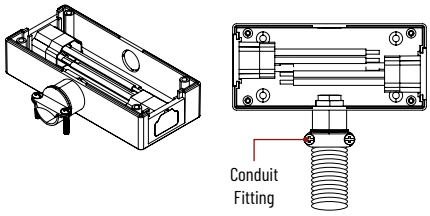


3 Mount and secure TX-JBOX to a surface by using the four screws provided.



4 Use wire nuts to connect supply leads to TX-JBOX wires. Line to black, neutral to white, and ground to green.

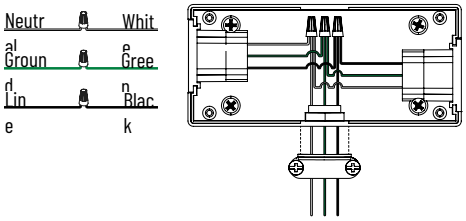

5 Safely place all wires into the NULSA-JBOX and secure TX-JBOX cover with screws



6 Connect the light to the JBOX

