LHB06(F)-说明书
规格：420*285mm 材质：80克书纸 单黑 双面印刷
品号：3.04.02302

LED Linear High Bay Instruction

Cautions:

1. Can not use the electric generator to test the LED lamp.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. To avoid electrical shock and damage, please do not install the lights in raining days.


Notices:


1.To prevent from electric shock or fire risk, the installation must be conducted by operator who have professional electrical knowledge.
2.Please wear gloves to avoid injury before installing lamps.
3.During or after installation, if there are situations such as smoke, fire in the wires or lamps, please turn off the power immediately and notify relevant personnel of an overhaul.
4.This light can be used for outdoor installation.


Instructions:

1 This product has dimming and non-dimming function, which differs in installation ways.
2 3 kind of dimming functions are available in this high bay light:
1) Constant current can be achieved by 0-10vDC dimming.
2) PWM signal dimming.
3) Variation of resistance unit dimming(Please choose the appropriate dimming way according to your needs. You can also choose not to use this function)
3 Choose the wire connection ways, dimming ways and installation ways according to your needs and the led fixture purchased.


Preparation before installation











Chain Installtion



















Pendant Mount Installation
















Surface Mount Installation















Sensor Installation Installation










Flip the color temperature switch to the desired color temperature (note: if both toggle switches need to be dialed to the corresponding color temperature) ; flip the power switch to the desired wattage, as shown in the figure.

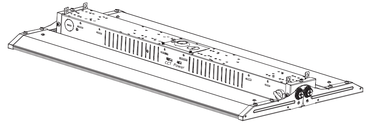

Note:

. The installation and maintenance must be completed by electricians or professionals.
. Please cut off the power before installation and maintenance.
. The thermally insulating material is not allowed to cover the fixture.
. Please keep away from the corrosive substance, and keep the fixture dry and clean.
. Working temperature: -40°F~113°F, storage temperature: -40°F~158°F.

General Wiring Diagram



The Installation must be carried out by a qualified electrician.