

Date:	_____
Project:	_____
Price:	_____

LED COOLER TUBE:

Description:


The I-luminosity's Tubes are perfect for retrofits, coolers, or standard fixtures. They can provide ample lighting or be directed to a specific location. It is available in 3000K, 4000K, 5000K CCT. Perfect for damp locations with our IP20 rating.



Features:

- Lighting control options available.
- AC 100-250V
- Rated life: 50,000 hours
- CRI>90
- Available in 3000K, 4000K, 5000K
- IP20 - Damp locations.
- Operating temperature: -5F - 104F
- Finish option: Silver
- 7 Year Warranty.
- Dimensions: 4FT, 5FT, 6FT.

Dimensions:

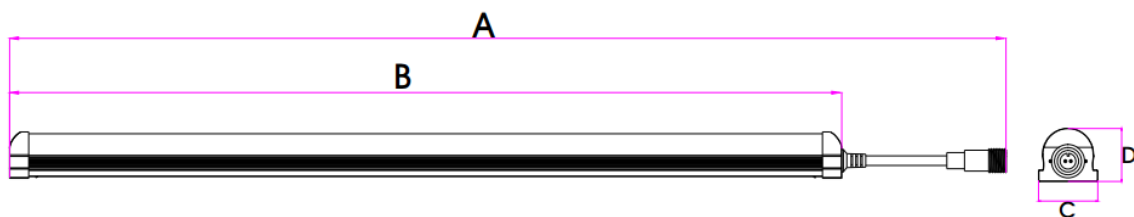

Maximum overall	A	B	C	D
4FT	50.9IN	46.9IN	1.3IN	1.1IN
5FT	62.7IN	58.7IN	1.3IN	1.1IN
6FT	74.5IN	70.6IN	1.3IN	1.1IN



Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILTBTZLN	18W - 4FT / 2,160	3K - 3000K	S - SILVER	
	32W - 5FT / 3,840	4K - 4000K		
	36W - 6FT / 4,320	5K - 5000K		

SAMPLE ITEM NUMBER: ILTBCTZN 18W 5K S

Electrical Data:



- **Input power:** Stays consistent over life
- **Input Voltage:** 100-250V
- **Operating Temperature:** -5F ~ 104F
- **CRI:** >90
- **Life Expectancy:** ~50,000 hours

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.



Date: _____
 Project: _____
 Price: _____

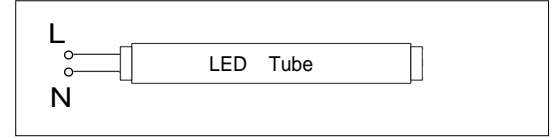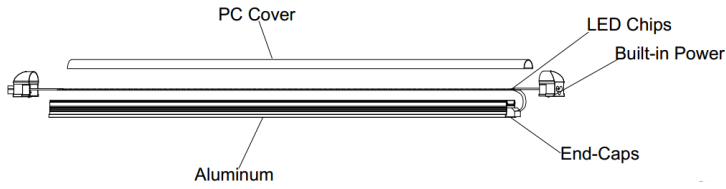

Electric Shock Attention


Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTION


STEP1. PLACE CLIP KITS AND SCREWS CORRECTLY




STEP2. FIX THE LED TUBE TO THE CEILING OR WALL

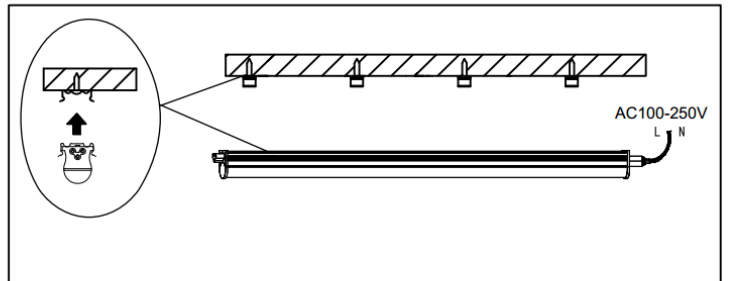

STEP3. CONNECT THE POWER CORD TO THE TUBE

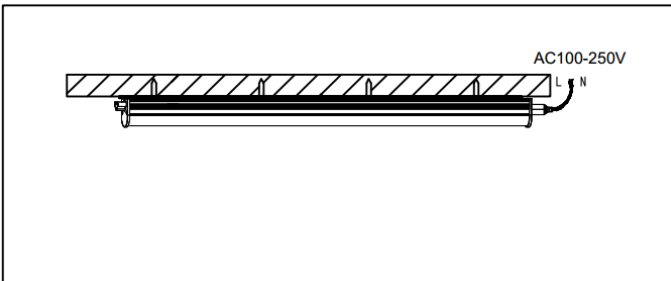

STEP4. CONNECT BY LINKABLE CONNECTOR

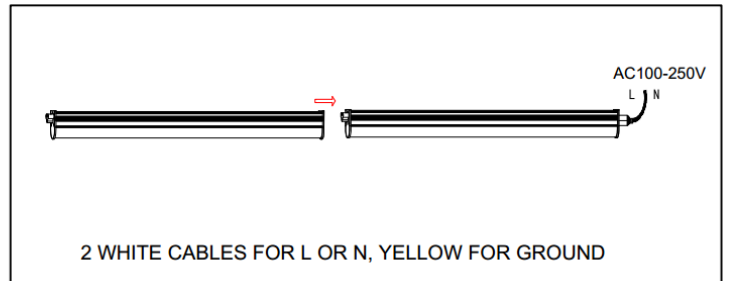

CAUTION: THE INTEGRATED TUBES CAN NOT BE CONNECTED MORE THAN TOTAL PCS

