

LED Instafit Tubes:

Description:

i-Luminosity's Instafit Tubes provide ample lighting or can be directed to a specific location. Available in 3000K, 4000K, or 5000K. Perfect for damp locations, IP20 rating for retrofits or standard fixtures.


Features:

- AC 120-277V
- Rated life: 50,000 hours
- CRI>90
- Available in 3000K, 4000K, 5000K.
- Beam Angle: 350°
- Material: Glass or Aluminum + PC
- Dimensions: 2FT or 4FT
- Type A+B tube works with ballast or without.
- Operating temperature: -5°F - 104°F
- 7 Year Warranty.





Dimensions:

2FT:

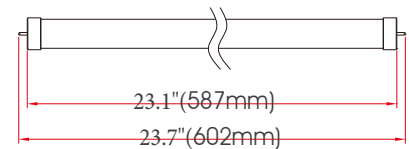

4FT:

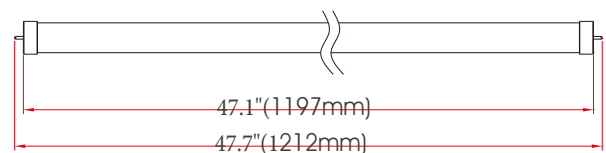

Ordering Key:

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	LEN	ADDITIONAL OPTIONS
ILTBITTP	2F10W - 2FT / 1,450	3K - 3000K	C - CLEAR LEN	G - GLASS MATERIAL
	4F12W - 4FT / 1,700	4K - 4000K	F - FROSTED LEN	A - Aluminum + PC MATERIAL
	4F15W - 4FT / 2,075	5K - 5000K		
	4F18W - 4FT / 2,450			

SAMPLE ITEM NUMBER: ILTBITTP 4F15W 4K F G


Installation:

Type A: only works with electronic ballast.


Electronic ballast



Electronic ballast

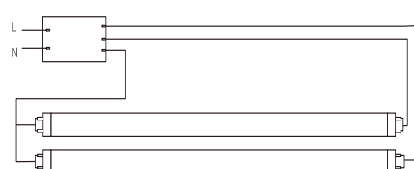

Type B: works without electronic ballast.



Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 120-277V
- **Operating Temperature:** -5F ~ 104F
- **CRI:** >90
- **Life Expectancy:** ~50,000 hours

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the delivery of lighting levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

