

LED Easton Shoebox Fixture:

Description:

Our high-power, LED Easton Shoebox Fixture is energy efficient with a high lumen output and a CRI >90. Featuring a die cast aluminum housing it is available in 4000K or 5000K CCT, with a type II, type III, type IV or type V optical system.. An IP66 rated fixture, perfect for the outdoors.


Features:

- Wattage: 400W
- Mounting options: Slipfitter, Trunnion, or arm.
- Easy installation
- Lighting control options available.
- AC 120-277V or AC277-480V
- L70 Lifetime: >50,000 hours
- CRI >90
- Available color options: 4000K or 5000K
- IP Rating: IP66 - Wet locations.
- Operating temperature: -5°F ~ 122°F
- Finish option: Bronze, Black, White, or Silver.
- 7 Year Warranty.
- Optical Systems: Type II, Type III, Type IV, Type V



Applications:

- Outdoor courts
- Parking lots
- Parking garages
- Playgrounds
- Parks
- Road lamp

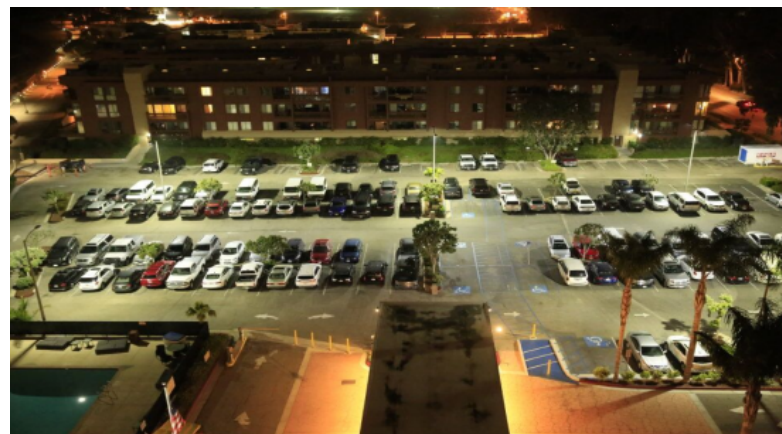

Ordering Key:

SERIES NUMBER	WATTS/ LUMENS	CCT	FINISH	OPTICAL SYSTEM	ADDITIONAL OPTIONS
ILSBEAWD	400W - 56,783	4 - 4000K	BR - BRONZE	II- TYPE II	DM - 1-10V DIMMING
		5 - 5000K	W - WHITE	III- TYPE III	TM - TRUNNION MOUNT
			BK - BLACK	IV - TYPE IV	SM - SLIPFITTER MOUNT
			S - SILVER	V - TYPE V	AM - ARM MOUNT
					PH - PHOTOCELL
					MS - MOTION SENSOR
					SS - SIDE SHIELD

SAMPLE ITEM NUMBER: ILSBEAWD 400W 4 BR II SM

Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** AC 120-277V or AC277-480V
- **Operating Temperature:** -5°F ~ 122°F
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours

Controls:


- This LED fixture is equipped with photocell, 1-10V dimming, or motion sensor options.

Optical System:


- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.



Dimensions:

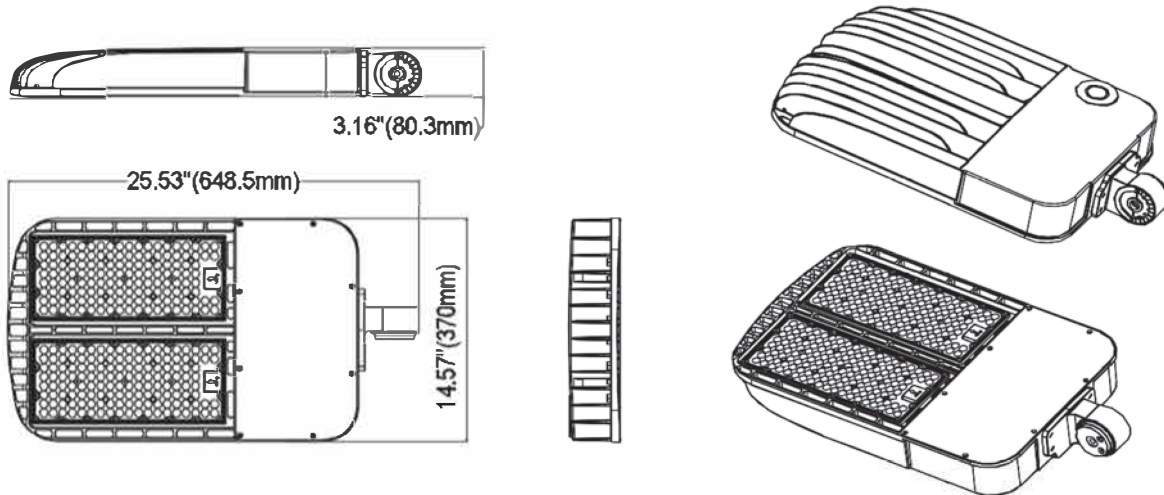


Photometrics:

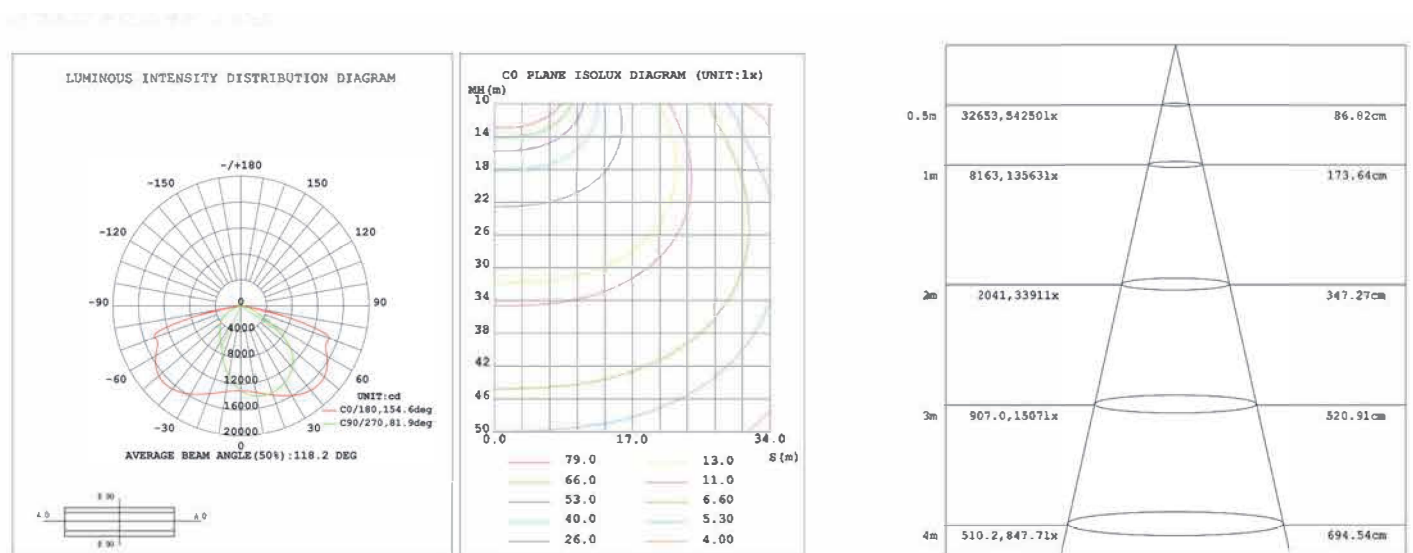

Photometrics


Type 2:

Type 2 optics produce a symmetrical pattern that evenly shines light on both sides of the lamp. In a back-to-back configuration, it creates a rectangular pattern.




Type 3:

Type 3 optics produce an asymmetrical pattern that directs the majority of the light forward and equally on both sides of the luminaire. In a back-to-back configuration, it creates a rectangular pattern.




Type 4:

Type 4 is suitable for applications where light is primarily required forward with minimal backlight. Typical installations include perimeter poles.



Type 5:





Type 5 optics produce a symmetrical square distribution pattern that distributes light equally on all sides of the luminaire. Type 5 luminaires are universal for most area lighting applications.



PHOTOCELL & MOTION SENSORS

	<p>Photocell No. PC Finish: Blue USE: Used for indoor or outdoor LED lamps, working with light sensing principle, the LC-10DT sensor (LC-10DT for 120-277V) is used for Light sensor.</p>		<p>SPECIFICATIONS AND CHARACTERISTICS:</p> <ul style="list-style-type: none"> • UL Listed. Reference No.: E178670 Volts & Cover Color • Blue standard for 120-277VAC • Turn-ON Light Level: 10-16 Lux • Turn ON/OFF Ratio: 1:3 to 4 • Time Delay: 3-15 sec • Operating Temperature: -40°C to +70°C • Relay: 15A • MOV Surge Protection: 90J, 160J, 320J, 360J (4 options) • Energy Consumption: Less than 1Watt (120V<0.5W) • Electrical Life: >50000 cycles • Sensor Type: Silicon Photocell • Housing: UV stabilized PC • Failure Mode: Fail ON (standard), Fail OFF (for your option)
	<p>Motion Sensor No. MSD Finish: White USE: The BR1816-B-D mounts in an outdoor lighting fixture and provides multi-level control based on motion. The sensor also includes a photocell to measure the ambient light level. It controls 0-10 VDC LED drivers, is rated for wet and cold locations. All control parameters are adjustable via a wireless configuration tool capable of storing and transmitting sensor profiles.</p>		<p>Motion Sensor No. MSB Finish: White The BR1816-B-D mounts in an outdoor lighting fixture and provides multi-level control based on motion and/or daylight contribution. It controls 0-10 VDC LED drivers or dimming ballasts, and is rated for wet and cold locations.</p>
	<p>Lamp Controller</p> <ul style="list-style-type: none"> ▪ Standard Nema Socket: Plug and Play ▪ Comprehensive critical electrical parameters monitoring, A, V, Wh, W, Hz ▪ Water Proof IP65 protection grade 		<p>LoRa Gateway</p> <ul style="list-style-type: none"> ▪ High capacity: up to 1000 street lights by one gateway ▪ Beacons: periodically synchronizes the GPS time of all end devices, facilitating scheduled access and flawless operation of the LoRaWAN™ ▪ Robust weather-proof design: IP67 protection grade


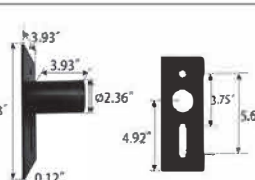
POLE BRACKET • For mounting one fixture on an existing pole

 <p>4" Square Pole Mount with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 0.3 USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>	 <p>3" Round Pole Mount with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 0.3 USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
 <p>5" Square Pole Mount with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 0.3 USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>	 <p>4" Round Pole Mount with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 0.3 USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>













WALL BRACKET

- Attaches to any flat surface
- Provides wiring access

MID-POLE TENON BRACKET





 <p>90° Wall Mount Bracket with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 0.6 USE: The 90° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>	 <p>2-3/8" OD Horizontal Tenon Mid-Pole Bracket Finish: Dark Bronze MAX EPA: 0.3 USE: 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slip-fitter onto a 2-3/8" OD horizontal tenon.</p>
--	---

ROUND EXTERNAL MOUNT HORIZONTAL TENON • To mount 2/3/4 fixtures on an existing pole







 <p>Double 90° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 0.6 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>Triple 120° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 0.7 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
 <p>Double 180° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 0.4 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>Quad 90° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 1.0 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
 <p>Single Spoke Bracket Tenon Adaptor Finish: Dark Bronze MAX EPA: 0.4 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. One fixture can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>Double 180° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 0.9 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
 <p>Triple 180° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 1.4 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>Quad 90° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 1.5 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
 <p>90° Wall Mount Bracket with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 0.7 USE: The 90° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>	 <p>Double 180° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 1.0 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
 <p>Triple 120° Horizontal Tenon Adaptor Finish: Dark Bronze MAX EPA: 1.5 USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>Double 180° Wall Mount Bracket with 2-3/8" O.D. Tenon Finish: Dark Bronze MAX EPA: 1.4 USE: The 180° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>

Installation Instructions

SQUARE EXTERNAL MOUNT HORIZONTAL TENON · To mount 2/3/4 fixtures on an existing pole

 <p>45" (1143mm) 7-01.56" (68mm) 25.5" (648mm) 4.72" (120mm) 1.31" (33mm) 1.24" (31.5mm) 91" (2300mm)</p>	<p>Low Profile Bullhorn with 3 Tenons NO. BU MAX EPA: 1.6 Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>20.5" (520mm) 2.4" (60mm) 4.7" (120mm) 24.6" (624.36mm) 3" (76mm)</p>	<p>Low Profile Bullhorn with 2 Tenons NO. LP MAX EPA: 1.0 Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
 <p>11.62" (295.22mm) 8.56" (218.86mm) 1.31" (33mm) 1.31" (33mm) 1.31" (33mm) 91" (2300mm)</p>	<p>Triple 120° Horizontal Tenon Adaptor NO. AD MAX EPA: 1.4 Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>	 <p>24.4" (620mm) 18" (457mm) 4.7" (120mm) 1.31" (33mm) 1.31" (33mm) 91" (2300mm)</p>	<p>Quad 0° Horizontal Tenon Adaptor NO. HO MAX EPA: 1.8 Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>

MOUNTING OPTIONS:


 <p>5.04" (128mm) 6.3" (160mm) 2.91" (74mm) 1.31" (33mm) 1.31" (33mm) 1.31" (33mm)</p>	<p>NO. AM Finish: Dark Bronze Arm Mount 4" and 5" Square and Round poles. Standard versatile mounting arm is simple to install and can be used with existing poles for retro installations.</p>	 <p>6.5" (165mm) 5" (127mm) 3.11" (79mm) 0.51" (13mm) 0.55" (14mm) 1.11" (28mm)</p>	<p>NO. SM Finish: Dark Bronze Slipfitter Mount An optional cast aluminum mast arm adapter secures fixture head to nominal 2"(2-3/8" O.D. pipe size) horizontal steel tenon arm.</p>
 <p>2.95" (75mm) 5" (127mm) 0.33" (8.5mm) 2.62" (66.5mm) 4.5" (113mm)</p>	<p>NO. WM Finish: Dark Bronze Easy to install for direct wall mounting with 1/2" conduit wiring.</p>	 <p>6.5" (165mm) 5" (127mm) 1.81" (46mm) 6.3" (160mm) 0.31" (8mm) 0.51" (13mm) 0.55" (14mm)</p>	<p>NO. TA Finish: Dark Bronze SFARM2 Mount An optional cast aluminum mast arm adapter secures fixture head to nominal 2"(2-3/8" O.D. pipe size) horizontal steel tenon arm.</p>
 <p>5.9" (149mm) 5.1" (129mm) 2" (50mm) 2.6" (66mm) 0.7" (17.8mm) 0.35" (8.9mm) 0.78" (19.8mm)</p>	<p>Arm Square tube turn tube Tenon Adaptor NO. AA Finish: Dark Bronze USE: square tube light bar installation, with Arm installation of lamps.</p>	 <p>3.86" (98mm) 3.75" (95mm) 5.6" (142mm) 4.92" (125mm)</p>	<p>Arm Square tube turn tube Tenon Adaptor NO. AS Finish: Dark Bronze USE: square tube light bar installation, with Arm installation of lamps.</p>

Installation Instructions

Arm with Photocell Installation


Step 1

As shown in the picture, open the connection box cover of the steering arm.

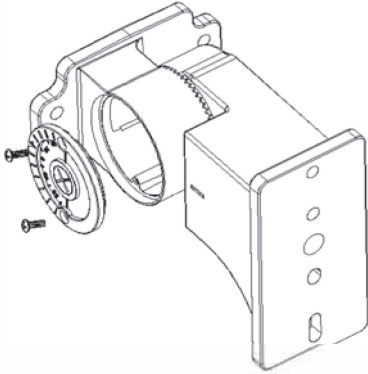


Step 3

Connect the photocell base with A_C line and check it correctly. As the picture is shown, lock the junction box cover and turn on the electricity.

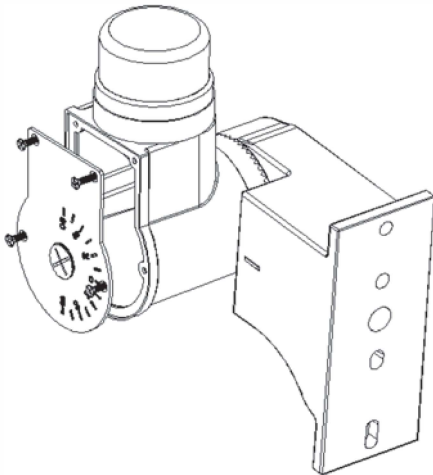


Step 2

As shown in the picture, the holes of the photocell in the junction box match with the screws of the mounting arm, then rotation and adjust the direction of the photocell, to ensure that the photocell is perpendicular to the ground.

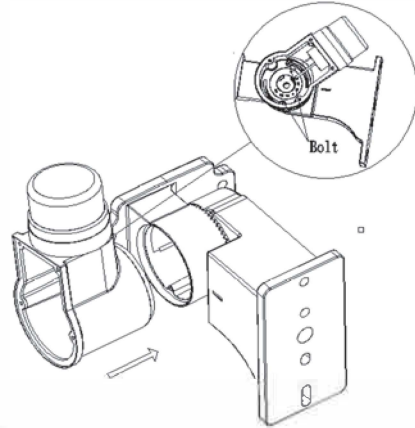

Step 4

Assembly drawing

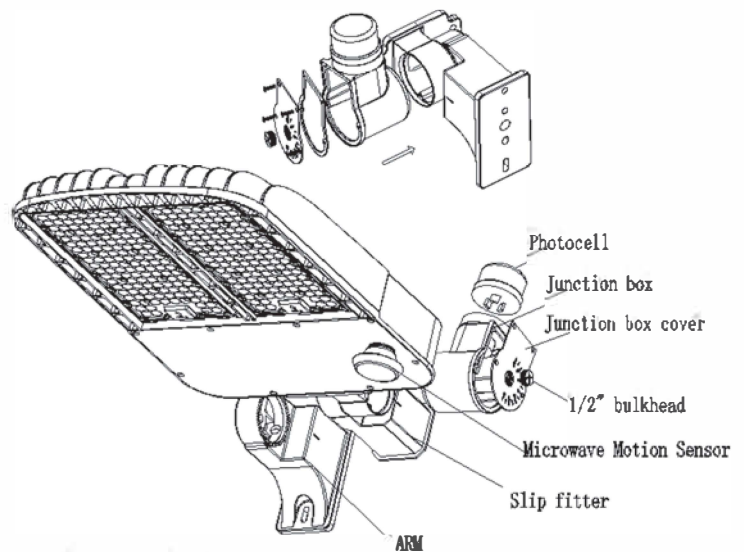

400W Shoebox Light Wiring drawing

