



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

LED THIN LINEAR FIXTURE


Description:

Our LED Thin Linear Fixture is a connectable fixture able to create various designs. This fixture has reliable quality, quick installation, minimal maintenance and a simple structure. It's an ideal product for any space.




Features:


- Input Voltage: 100- 277VAC
- Power Consumption: 10W, 15W, 20W, 30W or 40W
- Lumens Output: 85 Lm/W
- CRI >90
- Available CCT Options: 3000K, 4000K, 5000K or 6500K
- Available Connection Options: I, L, T or X
- Operating Temperature: -4°F ~ 113°F
- L70 Lifetime: >50,000 hours
- Dimensions: 19.69" x 3.15" x 0.75"
39.37" x 3.15" x 0.75"
- 7 Year Warranty

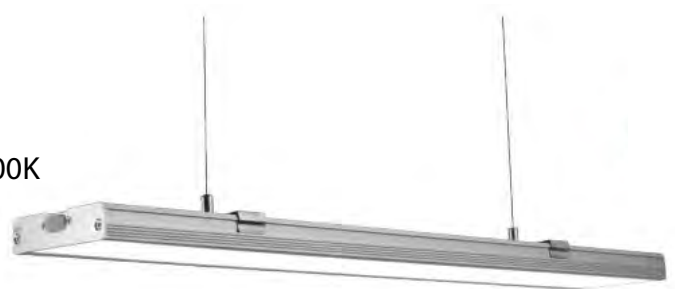

Connection Types:

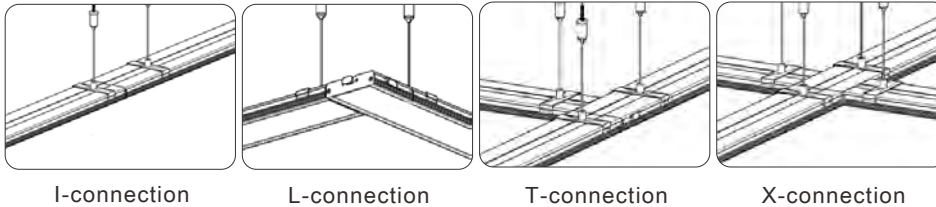

Dimensions:

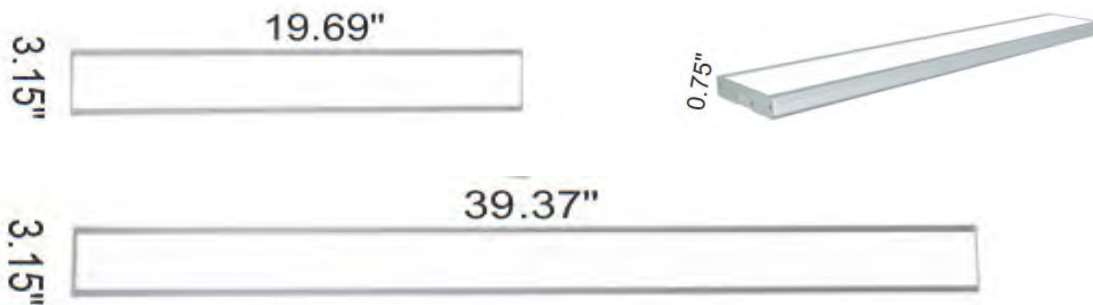

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	WATTS / LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILLTHYL	10w - 850	3 - 3000K		DM - 0-10V DIMMABLE
	15w - 1,270	4 - 4000K		
	20w - 1,700	5 - 5000K		
	30w - 2,550	65 - 6500K		
	40w - 3,400			

SAMPLE ITEM NUMBER: ILYLLL 30 5 DM

Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 100-277VAC
- **Operating Temperature:** -4°F ~ 113°F
- **CRI:** >90
- **Life Expectancy:** ~50,000 hours

Controls:

- This LED fixture can be equipped with a 0-10V dimming driver that works universally with any standard 0-10V control or dimmer.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

