



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

## LED Traditional Wall Pack

### Description:

i-Luminosity's LED Traditional Wall Pack comes in a black finish suitable for outdoor locations. Wattage options range from 30W-145W with color options 3000K, 4000K or 5000K. This wall pack is suitable for emergency backup.

### Features:

- Input Power: 120-277VAC, 347V & 480V
- Power Consumption: 30W, 40W, 45W, 50W, 60W, 70W, 75W, 90W, 95W, 135W, 140W, 145W
- Lumen Output: 124 LM/W
- Lighting controls option available.
- CRI >90
- L70 Lifetime: >50,000 hours.
- Available Mounting Options: Wall mounted.
- Available Color Options: 3000K, 4000K, or 5000K.
- Available Finish Option: Black
- IP Rating: IP54
- 7 Year Warranty.
- 



**Medium Size: 30W, 40W, 45W, 50W, 60W, 70W, 75W**






**Large Size: 90W, 95W, 135W, 140W, 145W**






Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

### Dimensions:

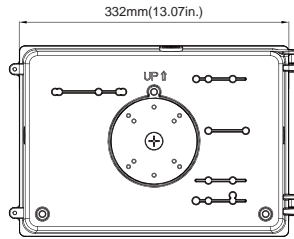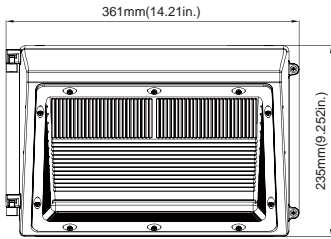


Weight  
 30W: 6.724lb  
 40W/50W: 8.223lb  
 45W: 6.834lb  
 70W: 6.9lb  
 60W/75W: 8.289lb

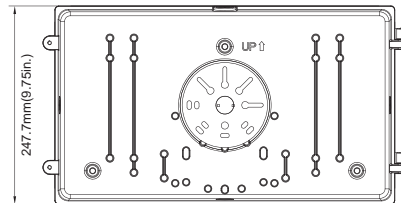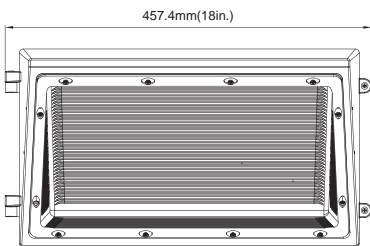

Weight  
 90W: 9.105lb  
 95W: 10.339lb  
 135W: 9.766lb  
 140W: 11.155lb  
 145W: 11.155lb


### Photometrics:

Medium size  
 Luminous Intensity Distribution Curve

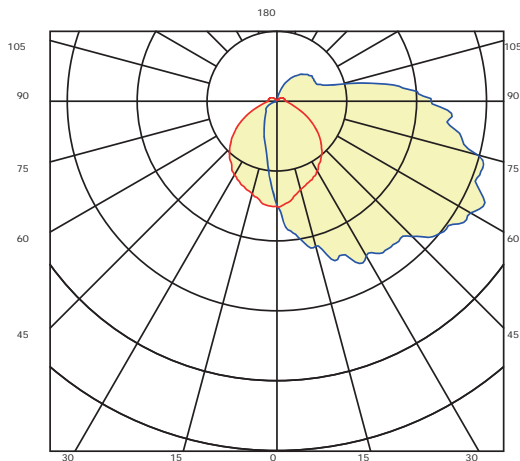

Average Diffuse Angle(50%): 103.0°

Large size  
 Luminous Intensity Distribution Curve

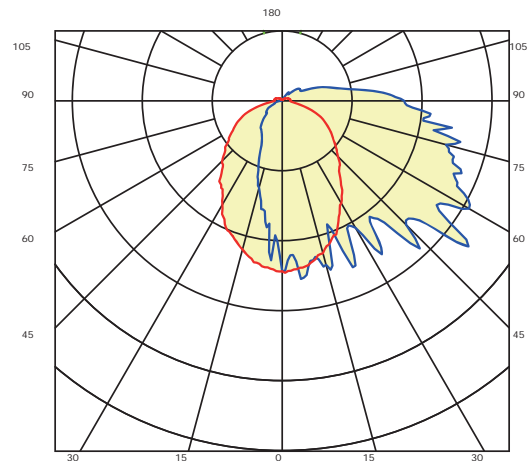

Unit: cd  
 Average Diffuse Angle(50%): 93.0°



Date:	_____
Project:	_____
Price:	_____

## Ordering Key:

SERIES NUMBER	WATTS / LUMENS/ VOLTAGE	CCT	FINISH	ADDITIONAL OPTIONS
ILMSTL	30w - 3,300/ 277V	3 - 3000K		MS - MOTION SENSOR
	40w - 4,600 / 347V	4 - 4000K		
	45w - 5,200 / 277V	5 - 5000K		
	50w - 5,200 / 347V			
	60w - 6,700 / 347V			
	70w - 8,000 / 277V			
	75w - 8,000 / 347V			
	90w - 10,900/ 277V			
	95w - 10,900 / 347V or 480V			
	135w - 15,600 / 277V			
	140w - 14,300/ 347V or 480V			
	145w - 15,600 / 347V or 480V			

SAMPLE ITEM NUMBER: ILMSTL 70 4 MS

### Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

### Controls:

- This LED fixture can be equipped with a motion sensor option.

### Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

