



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____


4" LED RECESSED RETROFIT TRIMS

Description:

Ideal for both remodel or new construction applications, our 4" LED Retrofit trims are compatible with most 3½" recessed standard housings. The kit comes with a detachable screw-in base connector for easy installation into standard incandescent sockets, making it perfect for any application.


Features:

- Input Power: 120V, 50/60 Hz
- Power Consumption: 9W
- Lumen Output: 636
- 0-10V dimmable option available.
- Lighting controls option available.
- L70 Lifetime: >50,000 hours.
- Operating Temperature: -22°F ~ 104°F
- Available Trim Options: Baffle (circular) trim or square baffle trim.
- Available Color Option: 3000K.
- CRI >90
- UL listed for damp & wet locations.
- 7 Year Warranty.
- Dimensions : D4.37" x H2.75"
L4.37" x W4.37" x H2.75"

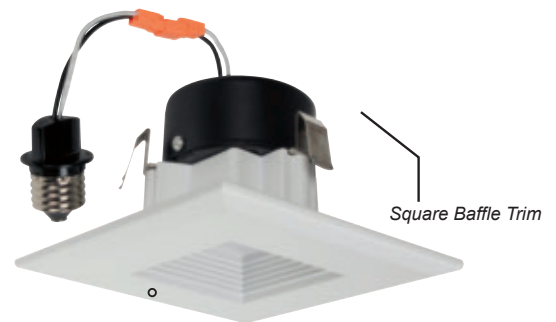


Dimensions:

Square Baffle Trim

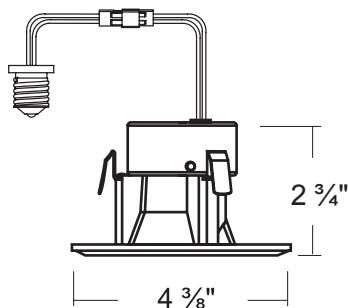

Circular Baffle Trim

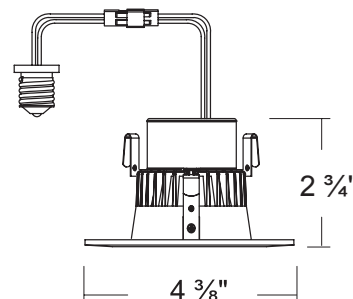

Ordering Key:

ILDR3RFCL

SERIES NUMBER	WATTS / SIZE / LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILDR3RFCL	8W - 4 IN / 636	3K - 3000K	SQ - SQUARE TRIM RD -ROUND TRIM	DIM - 0-10V DIMMING

SAMPLE ITEM NUMBER: ILDR3RFCL 8W 3K RD MS

Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 120V
- **Operating Temperature:** -22°F ~ 104°F
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours

Controls:

- This LED fixture is equipped with a 0-10V dimming driver that works universally with any standard 0-10V control or dimmer.
- Tuning and sequential lighting controls are available for this product.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

