

Date:	_____
Project:	_____
Price:	_____

LED FLEXIBLE SHOEBOX FIXTURE



YOKE MOUNTING



FLOOD MOUNTING




ADJUSTABLE FITTER MOUNTING



DIRECT MOUNTING

FEATURES:

- Adjustable Fitter mounting, direct mounting, yoke mounting, or flood mounting.
- Suitable for damp locations IP65.
- Optional: Daylight Motion sensor.
- Perfect for outdoor lots or street lighting
- 7 Year Warranty.
- Available in 4000K, 5000K, 5700K
- Dimensions: 20.6 in. x 12.6 in. x 3 in.

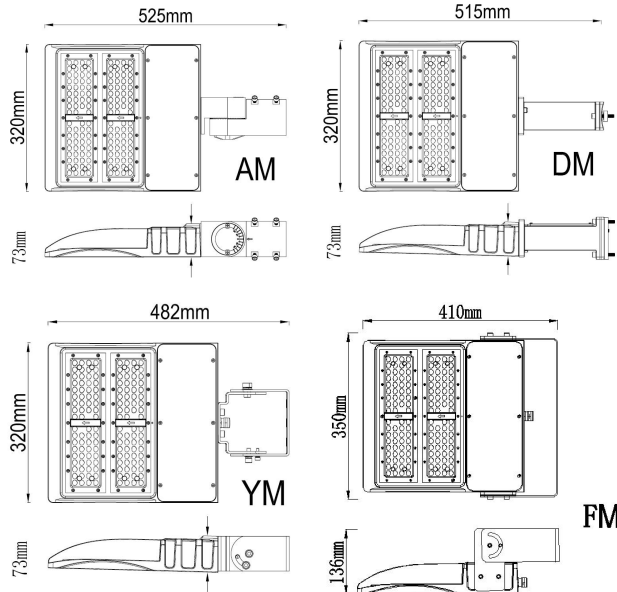

ILSBFLSNC

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILSBLSNC	60W - 20 IN / 8,700	4K - 4000K	B - BLACK	DMS - DAYLIGHT MOTION SENSOR
	90W - 20 IN / 33,600	5K - 5000K	BN - BROWN	
	120W - 20 IN / 41,000	57K - 5700K		
	150W - 20 IN / 41,000			

SAMPLE ITEM NUMBER:ILSBFLSNC 120W 5K BN DMS







i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

PHOTOMETRICS:

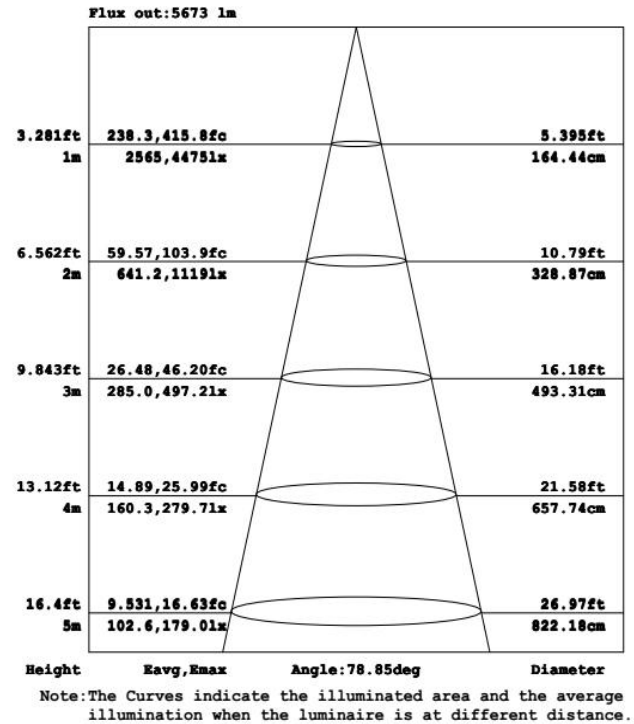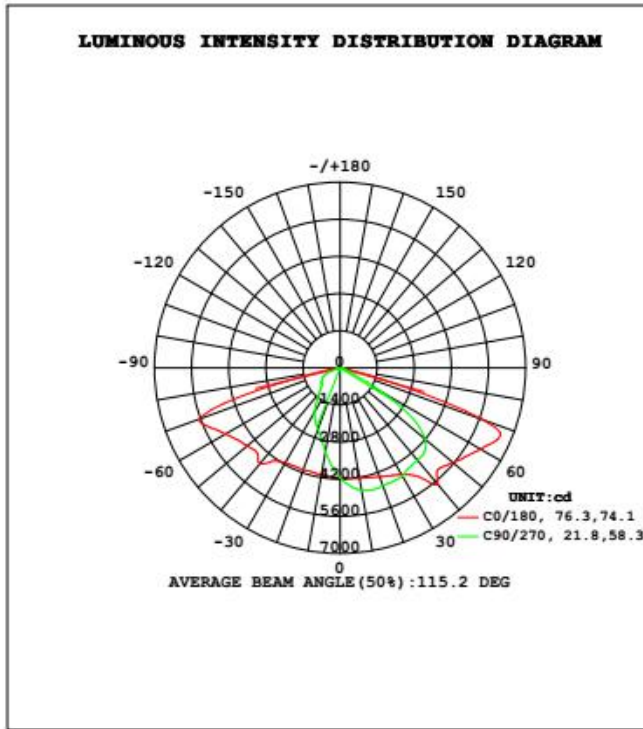

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	7660	S/MH (C0/180)	1.71
NOMINAL POWER (W)	120	LOR (%)	100.0	S/MH (C90/270)	0.72
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	16055	η UP, DN (C0-180)	0.1, 67.7
NOMINAL FLUX (lm)	16055.2	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 32.1
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	1.55

Eff: 133.27 lm/W

