

Date:	_____
Project:	_____
Price:	_____

MULTI - PURPOSE LINEAR FIXTURE

Description:

Our Multi-Purpose Linear Fixture is designed for outdoor and indoor use. Emitting a bright and even lightspread, this fixture is ideally suited for applications where wide-angle illumination is needed. Having an IP rating of IP66, this fixture is ideal for wet and dry locations, making it perfect for any application.



Features:





- Screwless end cap.
- Input Power: 100-277VAC
- Power Consumption: 40W, 60W, 80W or 100W
- Lumen Output: 130Lm/W.
- 0-10V dimmable option available.
- Emergency backup option available (up to 3 hours).
- Lighting controls option available.
- CRI >90
- Beam Angle: 180°
- IP Rating: IP66 - wet locations.
- Available Mounting Options: Suspended or surface mounted.
- Available Color Options: 3000K, 4000K, 5000K or 5700K.
- Operating Temperature: -4°F ~ 122°F
- L70 Lifetime: >50,000 hours.
- Linkable Option available (with a customizable cable length).
- 7 Year Warranty.
- Dimensions (L x W x H): 47.24" x 4.13" x 5.00"
59.05" x 4.13" x 5.00"

Applications:

- Parking Garages
- Schools
- Workshops
- Retail
- Warehouses
- Hallways



Dimensions:

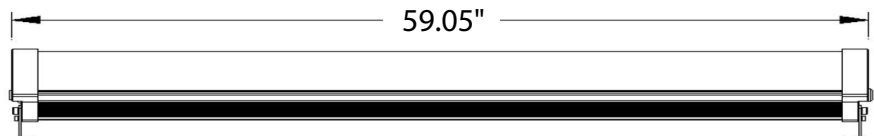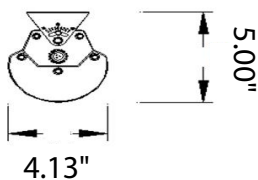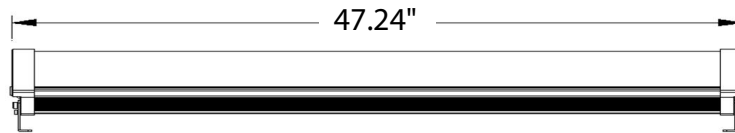

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	SIZE/ WATTS/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILLLMPTU	4x40w - 5,200	3 - 3000K		DM - 0-10V DIMMING
	4x60w - 7,800	4 - 4000K		EM - EMERGENCY BACKUP
	5x40w - 5,200	5 - 5000K		
	5x60w - 7,800	57 - 5700K		
	5x80w - 10,800			
	5x100w - 13,000			

SAMPLE ITEM NUMBER: ILLLMPTU 5x60 3 DM

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture can be equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.
- This fixture has an emergency backup option available in event of a power outage.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

