

Date:	_____
Project:	_____
Price:	_____

VERSATILE LEDCORN LIGHT



Features:

- UL, CUL, DLC certificate.
- E39, EX39 lamp base.
- 360 degree lighting.
- IP64 Waterproof Rating.
- Big heat sink, NO fans.
- Internal driver, input voltage AC100-277V.
- Sealant pouring for whole driver and lamp plastic housing.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide, easy Installation.
- Fits many different fixtures to replace traditional lamps.


SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILCBVCSNC	80W - 6 IN / 8,800	3K - 3000K		
		35K - 3500K		
		4K - 4000K		
		5K - 5000K		
		57K - 5700K		

SAMPLE ITEM NUMBER: ILCBVCSNC 80W 4K




Date:	_____
Project:	_____
Price:	_____

Photometrics:

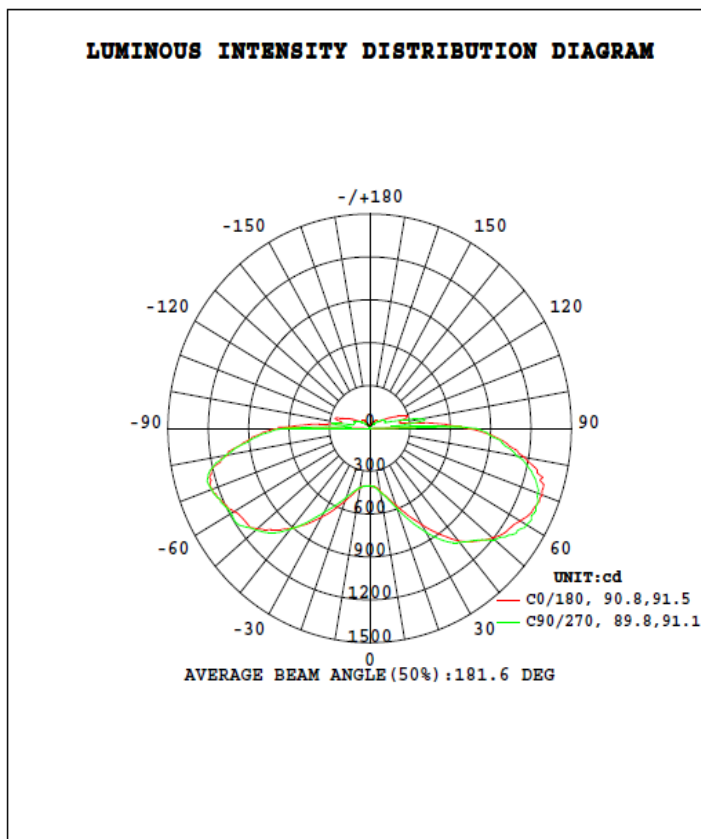

Flux out: 6675 lm

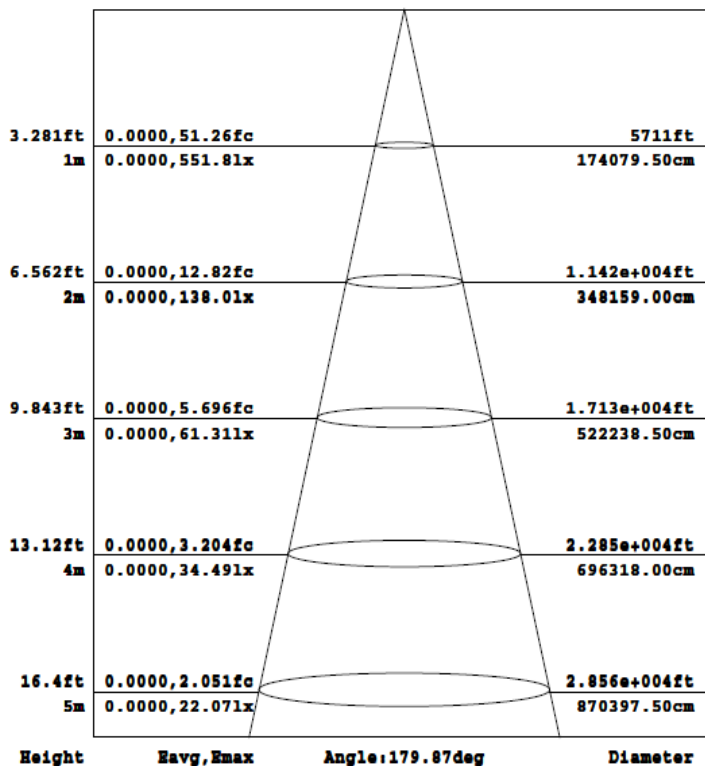

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.46 lm/W			
MODEL		I _{max} (cd)	1429	S/MH (C0/180)	2.93
NOMINAL POWER (W)	80	LOR (%)	100.0	S/MH (C90/270)	2.93
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7617.4	η UP, DN (C0-180)	6.6, 44.8
NOMINAL FLUX (lm)	7617.41	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	5.8, 42.9
LAMPS INSIDE	1	η up (%)	12.4	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120.0	η down (%)	87.6	CIBSE SHR MAX	0.00

