


| Date:    |  |
|----------|--|
| Project: |  |
| Price:   |  |
|          |  |

## SIMPLY CLEAN LED RECESSED FIXTURES



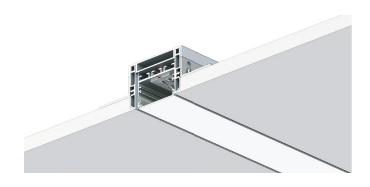

## **Description:**

Simply Clean series of recessed fixtures are designed to be harmonious with the physical space of a room. These extrusions can be installed into any size new or existing drywall/gypsum walls and ceilings. Wattages range from 3 W/ft to 12 W/ft (9.8 W/m to 39.4 W/m) and is available in white, static colors, Variable White, RGB, RGBW, RGBA, and Warm Dim. The internal LEDs can be installed with waterproof coating, making them resistant to moisture, however these fixtures are not intended for outdoor use.

## **Features:**

- IP Rating; IP20, IP65, IP68 options
- Simply clean recessed fixture
- Can be recessed or used as accent lighting
- Waterproof and UV resistant
- Additional accessories available; drivers, installations, and controllers etc.
- Calculations based on 1 foot, length of product varies.

| ILDCSCAC      |                         |                    |              |                      |
|---------------|-------------------------|--------------------|--------------|----------------------|
|               |                         |                    |              |                      |
| SERIES NUMBER | WATTS/ SIZE/ LUMENS     | ССТ                | FINISH       | ADDITONAL OPTIONS    |
| ILDCSCAC      | <b>3W</b> - 1 FT/ 300   | <b>24K</b> - 2400K | B - BLACK    | DIM - 0-10V DIMMING  |
|               | <b>6W -</b> 1 FT / 600  | <b>27K</b> - 2700K | W - WHITE    | EM -EMERGENCY BACKUP |
|               | <b>8W</b> -1FT/800      | <b>3K</b> - 3000K  | AL- ALUMINUM |                      |
|               | <b>10W-</b> 1 FT / 1000 | <b>35K-</b> 3500K  | G - GOLD     |                      |
|               | 11W - 1 FT / 11000      | <b>4K -</b> 4000K  |              |                      |
|               | 12W - 1 FT / 1200       | <b>5K -</b> 5000K  |              |                      |
|               |                         | <b>6K -</b> 6000K  |              |                      |
|               |                         | <b>62K -</b> 6200K |              |                      |
|               |                         | RGB                |              |                      |

SAMPLE ITEM NUMBER: ILDCSCAC 8W 5K W DIM



(888)-998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com



| Date:    |  |  |  |
|----------|--|--|--|
| Project: |  |  |  |
| Price:   |  |  |  |
| -        |  |  |  |

| Specifications:                        | SC1   | SC2  |
|--|---|--|
| Beam Angle                             |   |  |
|  |   |  |
| Internal Width<br>Height               | 60°   | 80°  |
| Wattage                                | 1.38 in (35 mm)   | 1.97 in (50 mm)<br>1.89 in (48 mm)   |
| Internal                               | 1.89 in (48 mm)<br>3 W/ FT, 6 W/ FT, 8.8 W/ FT, 10 W/ FT, 10.4 W/ F               |  |
|  | 3 W/ FI, 0 W/ FI, 8.8 W/ FI, 10 W/ FI, 10.4 W/ F                                  | 1, 11 VV/ F1, 12 VV/ F1  |
| Length                                 | greater than 8 feet or 2.5 meters, to ensu  | <br>Id cutting by contractor on site for any run lengths<br>ire that measurements align exactly with the<br>tyral space. |
| For installation, cut hole in ceiling: | 2.13 in<br>54.1 mm<br>1.89 in<br>48 mm<br>1.38 in*<br>35 mm<br>2.02 in<br>51.3 mm | 2.72 in<br>69.1 mm<br>1.89 in<br>48 mm<br>48 mm<br>50 mm<br>2.55 in<br>64.8mm  |
| Parts:                                 |   |  |
|  |   |  |
| Spring clip Assembly                   | Back base Tri   | imless kit L bracket   |
|  |   | End cap  |
| Fixture                                | Lens  | Litu cap   |