

LED UP & DOWN DIRECT & INDIRECT PENDANT

Description:

This modern design pendant is made from strong aluminum that is shock-proof as well as anti-fall. With standard 0-10V dimming availability & variety of CCT options this fixture is perfect for any setting.

Features:

- Input Voltage: 100-277VAC, 50/60Hz
- Input Wattage: 40W
- Lumens Output: 90 Lm/W
- Available Color Options: 3000K, 3500K, 4000K or 5000K
- Available Finish Options: Square Direct, Round Direct, Square Indirect or Round Indirect
- Available Beam Angles: Direct 60/40, Indirect 80/20
- CRI >90
- Mounting: Suspended
- 0-10V dimmable option available.
- Lighting controls option available
- L₇₀ Lifespan: >50,000 hours
- 7 Year Warranty




Applications:

- | | |
|--------------------|-----------|
| • Offices | • Lounges |
| • Restaurants | • Lobbies |
| • Conference Rooms | • Retail |




Dimensions:

Round Direct

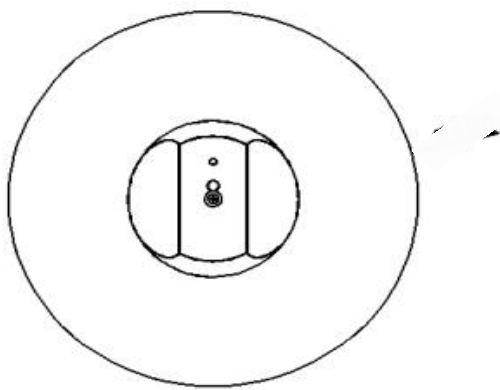


18.89"

Round Indirect

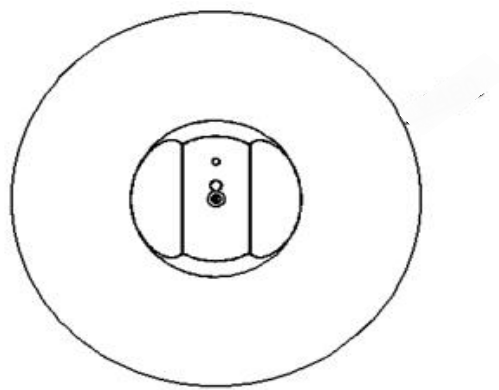


18.89"

Square Direct





6.9"

Square Indirect



5.8"

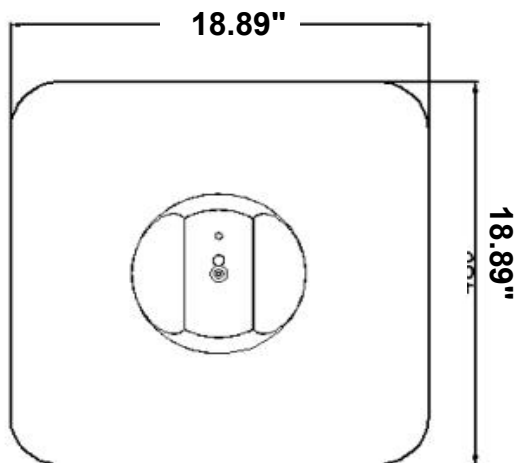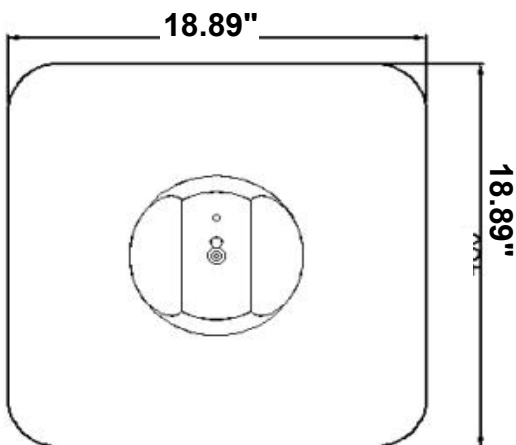

Order Options:

ILGLML				
SERIES NUMBER	WATTS / LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILGLML	40W / 3,600	3K - 3000K	SQ - Square/Direct	DM - 0-10V Dimming
		35K - 3500K	CR - Circle/Direct	
		4K - 4000K	SQI - Square/Indirect	
		5K - 5000K	CRI - Circle/Indirect	

SAMPLE ITEM NUMBER: ILGLML 40 35 SQI DM

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture can be equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Optical System:


- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.




Photometrics:




Circle - Indirect

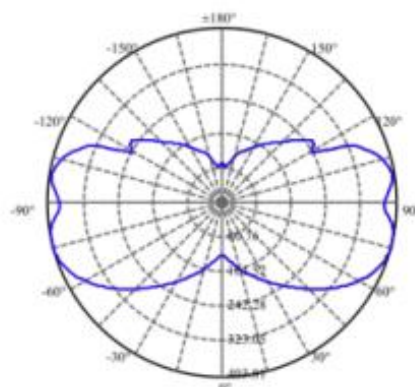

Circle - Direct

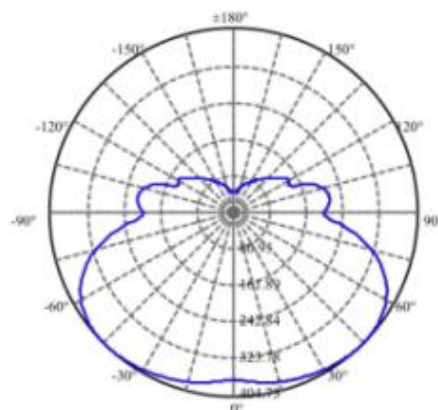

Square - Indirect

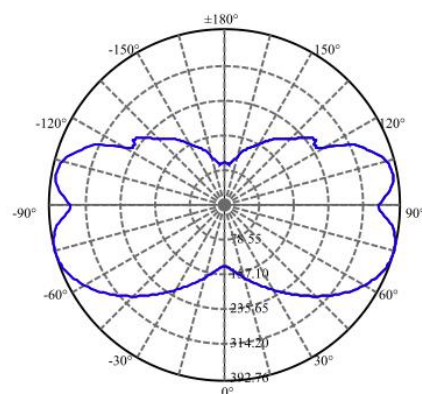

Square - Direct

