

Date:	_____
Project:	_____
Price:	_____

Up & Down Wallpack

Description:

Up & Down Wallpack is divided into 2 parts allowing you to point one up and one down for indirect or direct lighting options. Wattage options range from 25W-120W with color options 4000 or 5000K.



Features:


- Input Power: 100-240VAC/ 100-277VAC
- Power Consumption: 25W, 40W, 60W, 80W & 120W
- Lumen Output: 13,300 Lm - 13,800 Lm
- Lighting controls option available.
- CRI >90
- L70 Lifetime: >50,000 hours.
- Available Mounting Options: Wall mounted.
- Available Color Options: 4000K or 5000K.
- Available Finish Options: Black
- Beam Angle: 60°
- IP Rating: IP65
- 7 Year Warranty.
- Dimensions: 9.13" x 5.39" x 5.20"
9.13" x 8.86" x 5.20"




Date: _____
 Project: _____
 Price: _____

Photometrics:

Beam Profile

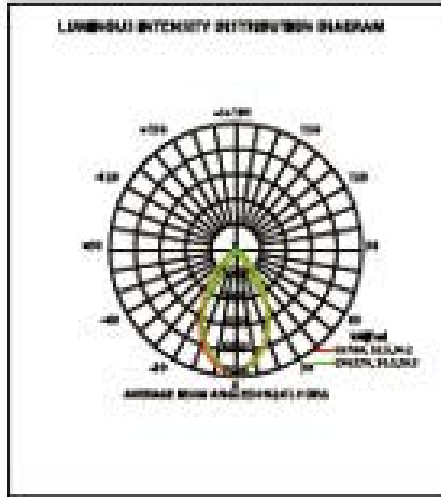

Illumination

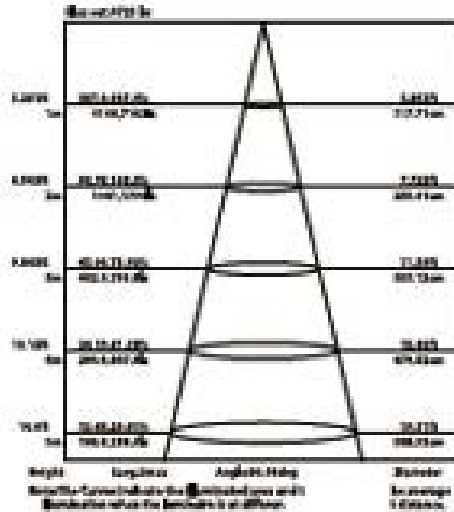

Ordering Key:

SERIES NUMBER	WATTS / SIZE / LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILSNCUDWP	25w - 5.4IN / 3,375	4 - 4000K	B - BLACK	MS - MOTION SENSOR
	40w - 5.4IN / 5,400	5 - 5000K		
	60w - 5.4IN / 7,200			
	60w - 8.9IN / 8,100			
	80w - 8.9IN / 10,800			
	120w - 8.9IN / 13,800			

SAMPLE ITEM NUMBER: ILSNCUDWP 25 4 B MS

Controls:

- This LED fixture is equipped with a motion sensor option.

Electrical Data:

- Input Power:** Stays consistent over life.
- Input Voltage:** 100-277 VAC
- CRI:** >90
- L70 Lifetime:** >50,000 hours.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

