

LED LINEAR LIGHT WITH COVER



Features

- Available for 2ft, 4ft and 8ft as per applications
- Surface mounting or Chain mounting for different applications
- PIR Sensor and Emergency Battery support
- Voltage is 120-277V or 347/480V
- Standard 0-10V dimming available, Projected life span of 50,000 hrs
- Comparable to T8 or T5HO
- Operating temperature is -40°C to 40°C
(- 40°F to 104°F)
- UL/cUL listed and DLC qualified



1/2" Knockouts

End Cap Wiring Knockouts are designed for connecting multiple fixtures, to achieve 4ft, 8ft, 12ft length etc.

Emergency Battery

8W 900lm 90min

1/2" Knockouts

This 1/2" knockouts can be designed for external PIR sensor allows for security and energy saving

Housing

Easy installation and lower maintenance, and one-piece housing does not require additional accessories, more cost-effective



PERFORMANCE DATA

					3000K(80CRI)	4000K(80CRI)	5000K(80CRI)
Item Number	SYSTEM WATTS	SIZE	LENS	VOLTAGE	LUMENS	LUMENS	LUMENS
SWWHGF022FT-18W	18W	2 FT	Frosted	120-277VAC	2,430lm	2,520lm	2,610lm
SWWHGF024FT-24W	24W	4 FT	Frosted	120-277VAC	3,240lm	3,360lm	3,480lm
SWWHGF024FT-36W	36W	4 FT	Frosted	120-277VAC	4,860lm	5,090lm	5,220lm
SWWHGF024FT-42W	42W	4FT	Frosted	120-277VAC	5,670lm	5,880lm	6,090lm
SWWHGF028FT-68W	68W	8 FT	Frosted	347V/480V	9,180lm	9,520lm	9,860lm

ENERGY SAVING REPLACEMENT

Size	Power	Replacing
2ft	18	T8x1
4ft	24	T8x2
4ft	36	T5HOx2
4ft	42	T8HOx2
8ft	68	T5HOx4/T8x4




DIMENSION

unit: inch/mm


4'

Weight
30W: 5.75lb
45W: 5.88lb

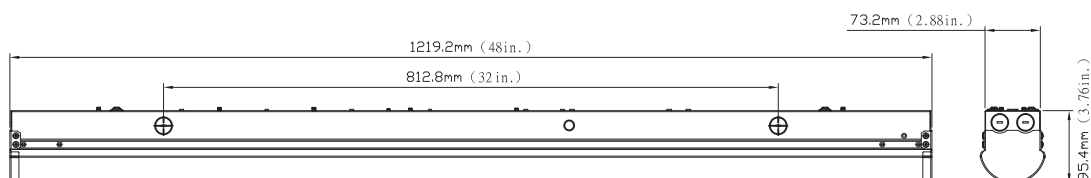

8'

Weight
60W: 11.28lb
80W: 11.42lb

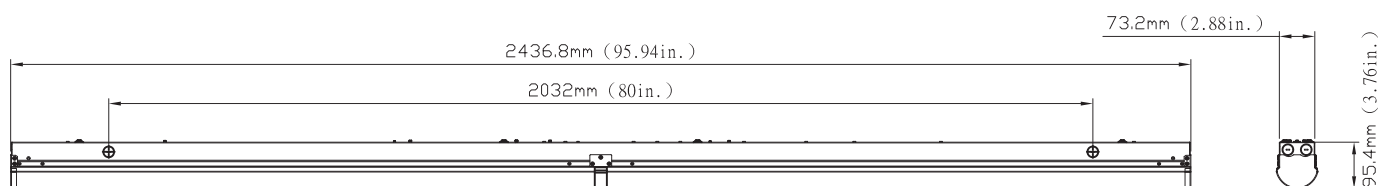

PHOTOMETRICS

General

