
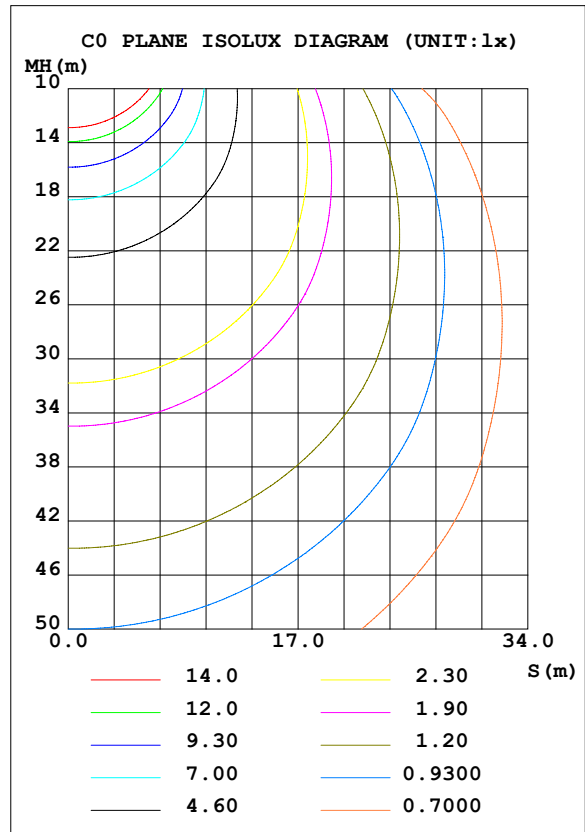


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.95 lm/W			
MODEL	R2DG180615051-10	Imax (cd)	2326	S/MH (C0/180)	1.44
NOMINAL POWER (W)	68	LOR (%)	100.0	S/MH (C90/270)	1.44
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	9451.9	η UP, DN (C0-180)	0.1,49.9
NOMINAL FLUX (lm)	9451.92	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,49.9
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.55

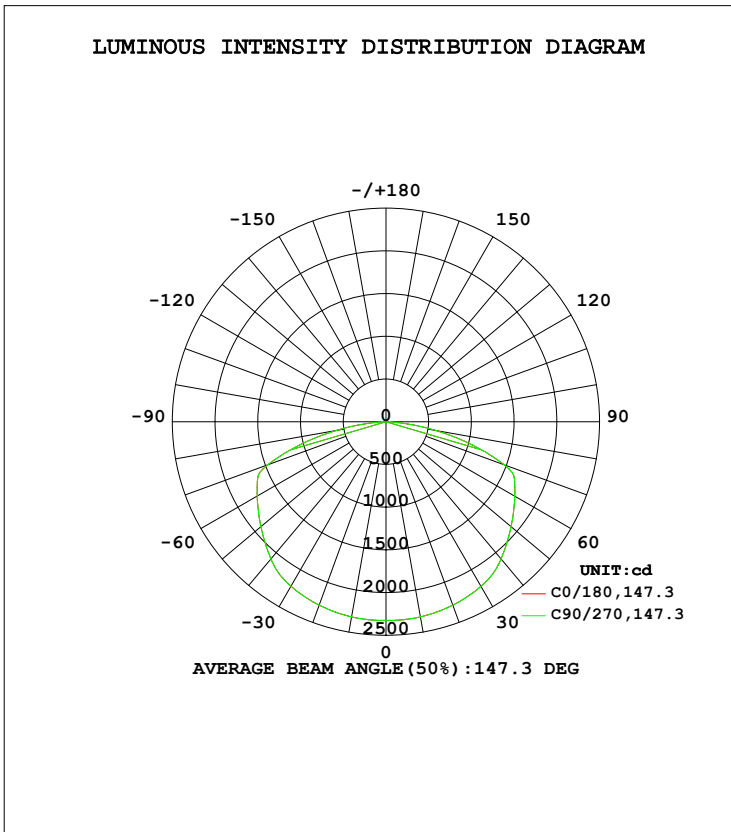

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2319	2319	2319	2319	2319	2319	2319	2319	0- 10	221.8	221.8	2.35,2.35
20	2284	2284	2284	2284	2284	2284	2284	2284	10- 20	652.6	874.3	9.25,9.25
30	2223	2223	2223	2223	2223	2223	2223	2223	20- 30	1043	1918	20.3,20.3
40	2095	2095	2095	2095	2095	2095	2095	2095	30- 40	1362	3279	34.7,34.7
50	1912	1912	1912	1912	1912	1912	1912	1912	40- 50	1549	4828	51.1,51.1
60	1740	1740	1740	1740	1740	1740	1740	1740	50- 60	1635	6463	68.4,68.4
70	1471	1471	1471	1471	1471	1471	1471	1471	60- 70	1634	8098	85.7,85.7
80	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	70- 80	1094	9192	97.2,97.2
90	5.454	5.454	5.454	5.454	5.454	5.454	5.454	5.454	80- 90	245.1	9437	99.8,99.8
100	1.318	1.318	1.318	1.318	1.318	1.318	1.318	1.318	90-100	1.573	9439	99.9,99.9
110	1.453	1.453	1.453	1.453	1.453	1.453	1.453	1.453	100-110	1.467	9440	99.9,99.9
120	1.742	1.742	1.742	1.742	1.742	1.742	1.742	1.742	110-120	1.555	9442	99.9,99.9
130	2.307	2.307	2.307	2.307	2.307	2.307	2.307	2.307	120-130	1.793	9443	99.9,99.9
140	3.182	3.182	3.182	3.182	3.182	3.182	3.182	3.182	130-140	2.098	9445	99.9,99.9
150	4.355	4.355	4.355	4.355	4.355	4.355	4.355	4.355	140-150	2.354	9448	100,100
160	5.103	5.103	5.103	5.103	5.103	5.103	5.103	5.103	150-160	2.193	9450	100,100
170	5.238	5.238	5.238	5.238	5.238	5.238	5.238	5.238	160-170	1.476	9451	100,100
180	4.666	4.666	4.666	4.666	4.666	4.666	4.666	4.666	170-180	0.4859	9452	100,100
DEG	LUMINOUS INTENSITY:cd Less than 25% Percent = 4.4 %									UNIT:lm		

Conical surface Flux(90deg): 4037.7 lm

%lum = 42.7%
 %lamp = 42.7%

Conical surface Flux(120deg): 6463.3 lm

%lum = 68.4%
 %lamp = 68.4%


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

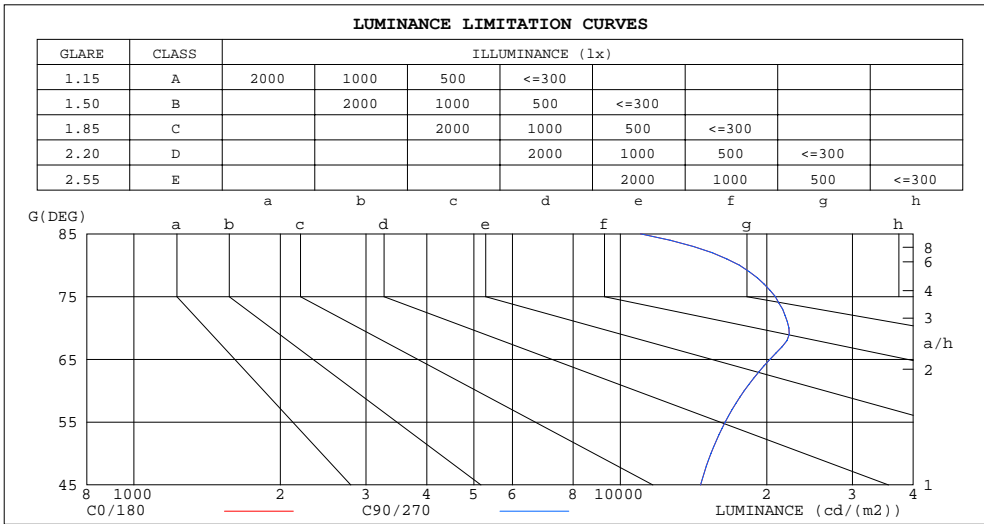

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11003	11003
80	17570	17570
75	20818	20818
70	22215	22215
65	20307	20307
60	17978	17978
55	16425	16425
50	15360	15360
45	14622	14622

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.01	.96	.92	.99	.95	.90	.95	.91	.88	.91	.88	.85	.87	.84	.82	.80
2.0	.86	.79	.72	.84	.77	.71	.81	.75	.69	.77	.72	.68	.74	.70	.66	.64
3.0	.74	.65	.58	.73	.64	.57	.70	.62	.56	.67	.60	.55	.64	.59	.54	.52
4.0	.65	.55	.48	.64	.54	.47	.61	.53	.47	.58	.51	.46	.56	.50	.45	.43
5.0	.57	.47	.40	.56	.47	.40	.54	.46	.39	.52	.45	.39	.50	.44	.38	.36
6.0	.51	.41	.34	.50	.41	.34	.48	.40	.34	.46	.39	.34	.45	.38	.33	.31
7.0	.46	.37	.30	.45	.36	.30	.44	.35	.30	.42	.35	.29	.41	.34	.29	.27
8.0	.42	.33	.26	.41	.32	.26	.40	.32	.26	.38	.31	.26	.37	.31	.26	.24
9.0	.38	.29	.24	.38	.29	.23	.36	.29	.23	.35	.28	.23	.34	.28	.23	.21
10.0	.35	.27	.21	.35	.26	.21	.33	.26	.21	.32	.26	.21	.32	.25	.21	.19

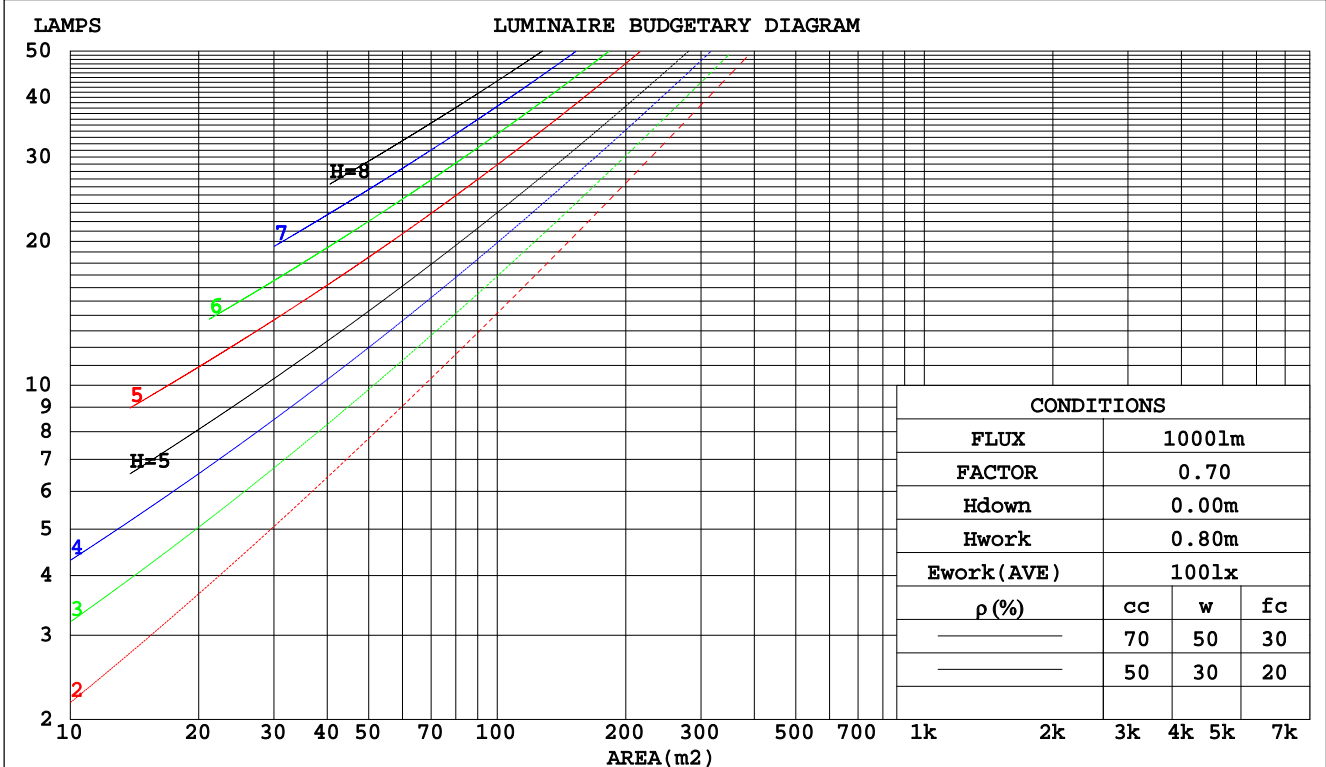

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

WEC AND CCEC

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.349	.199	.063	.336	.193	.062	.323	.186	.060	.312	.181	.058	
2.0	.331	.181	.056	.324	.179	.055	.312	.174	.054	.301	.169	.053	.291	.164	.052	
3.0	.302	.161	.048	.296	.159	.048	.285	.155	.047	.275	.151	.046	.266	.147	.046	
4.0	.275	.143	.042	.270	.141	.042	.260	.138	.041	.251	.135	.041	.243	.132	.040	
5.0	.251	.128	.037	.247	.127	.037	.238	.124	.036	.230	.121	.036	.223	.119	.036	
6.0	.231	.116	.033	.227	.114	.033	.219	.112	.033	.212	.110	.032	.205	.108	.032	
7.0	.213	.105	.030	.209	.104	.030	.203	.102	.029	.196	.101	.029	.190	.099	.029	
8.0	.198	.097	.027	.194	.096	.027	.188	.094	.027	.183	.092	.027	.177	.091	.026	
9.0	.184	.089	.025	.181	.088	.025	.176	.087	.025	.171	.086	.024	.166	.084	.024	
10.0	.172	.083	.023	.170	.082	.023	.165	.081	.023	.160	.080	.023	.156	.078	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.185	.157	.132	.158	.135	.114	.108	.093	.078	.062	.054	.046	.020	.017	.015	
2.0	.179	.133	.094	.153	.114	.082	.105	.079	.057	.060	.046	.033	.019	.015	.011	
3.0	.172	.116	.071	.147	.100	.062	.101	.069	.043	.058	.041	.025	.019	.013	.008	
4.0	.164	.103	.056	.141	.089	.048	.097	.062	.034	.056	.036	.020	.018	.012	.007	
5.0	.157	.093	.045	.135	.080	.039	.093	.056	.028	.054	.033	.017	.017	.011	.005	
6.0	.149	.084	.038	.128	.073	.033	.089	.051	.023	.051	.030	.014	.017	.010	.005	
7.0	.142	.078	.033	.122	.067	.028	.084	.047	.020	.049	.028	.012	.016	.009	.004	
8.0	.135	.072	.028	.116	.062	.025	.080	.044	.018	.047	.026	.010	.015	.008	.003	
9.0	.129	.067	.025	.111	.058	.022	.077	.041	.016	.045	.024	.009	.014	.008	.003	
10.0	.122	.063	.023	.106	.054	.020	.073	.038	.014	.043	.023	.008	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm										
NAME: Direct Linear Ambient Luminaires					TYPE:N/A			WEIGHT:N/A		
SPEC.:N/A					DIM.: N/A			SERIAL No.:N/A		
MFR.:					SUR.:N/A			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.8	23.4	25.0	25.2	23.1	24.8	23.4	25.0	25.2
3H	25.7	27.3	26.0	27.5	27.8	25.7	27.3	26.0	27.5	27.8
4H	26.7	28.1	27.0	28.4	28.7	26.7	28.1	27.0	28.4	28.7
6H	27.3	28.7	27.6	28.9	29.2	27.3	28.7	27.6	28.9	29.2
8H	27.4	28.8	27.8	29.1	29.4	27.4	28.8	27.8	29.1	29.4
12H	27.5	28.8	27.8	29.1	29.4	27.5	28.8	27.8	29.1	29.4
4H 2H	24.1	25.5	24.4	25.8	26.1	24.1	25.5	24.4	25.8	26.1
3H	26.8	28.1	27.1	28.4	28.7	26.8	28.1	27.1	28.4	28.7
4H	27.8	29.0	28.2	29.4	29.7	27.8	29.0	28.2	29.4	29.7
6H	28.5	29.6	28.9	29.9	30.3	28.5	29.6	28.9	29.9	30.3
8H	28.7	29.7	29.1	30.1	30.5	28.7	29.7	29.1	30.1	30.5
12H	28.8	29.7	29.2	30.1	30.5	28.8	29.7	29.2	30.1	30.5
8H 4H	28.2	29.2	28.6	29.6	30.0	28.2	29.2	28.6	29.6	30.0
6H	29.0	29.9	29.5	30.3	30.7	29.0	29.9	29.5	30.3	30.7
8H	29.3	30.0	29.8	30.5	30.9	29.3	30.0	29.8	30.5	30.9
12H	29.4	30.1	29.9	30.5	31.0	29.4	30.1	29.9	30.5	31.0
12H 4H	28.2	29.1	28.7	29.5	30.0	28.2	29.1	28.7	29.5	30.0
6H	29.1	29.8	29.6	30.3	30.7	29.1	29.8	29.6	30.3	30.7
8H	29.4	30.0	29.9	30.5	31.0	29.4	30.0	29.9	30.5	31.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 9452 lm Total Lamp Luminous Flux. (8log(F/F0) = 7.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	52	40	32	52	40	32	50	39	32	25
0.80	62	49	41	61	49	41	59	48	40	33
1.00	70	58	50	69	57	49	67	59	49	41
1.25	78	66	58	76	65	57	73	63	56	48
1.50	83	72	64	81	71	63	78	69	62	54
2.00	91	81	73	89	79	72	85	77	71	62
2.50	95	86	79	93	85	78	89	82	77	67
3.00	99	91	85	97	90	84	93	87	82	72
4.00	104	97	92	101	96	91	97	92	88	78
5.00	107	101	97	104	99	95	100	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

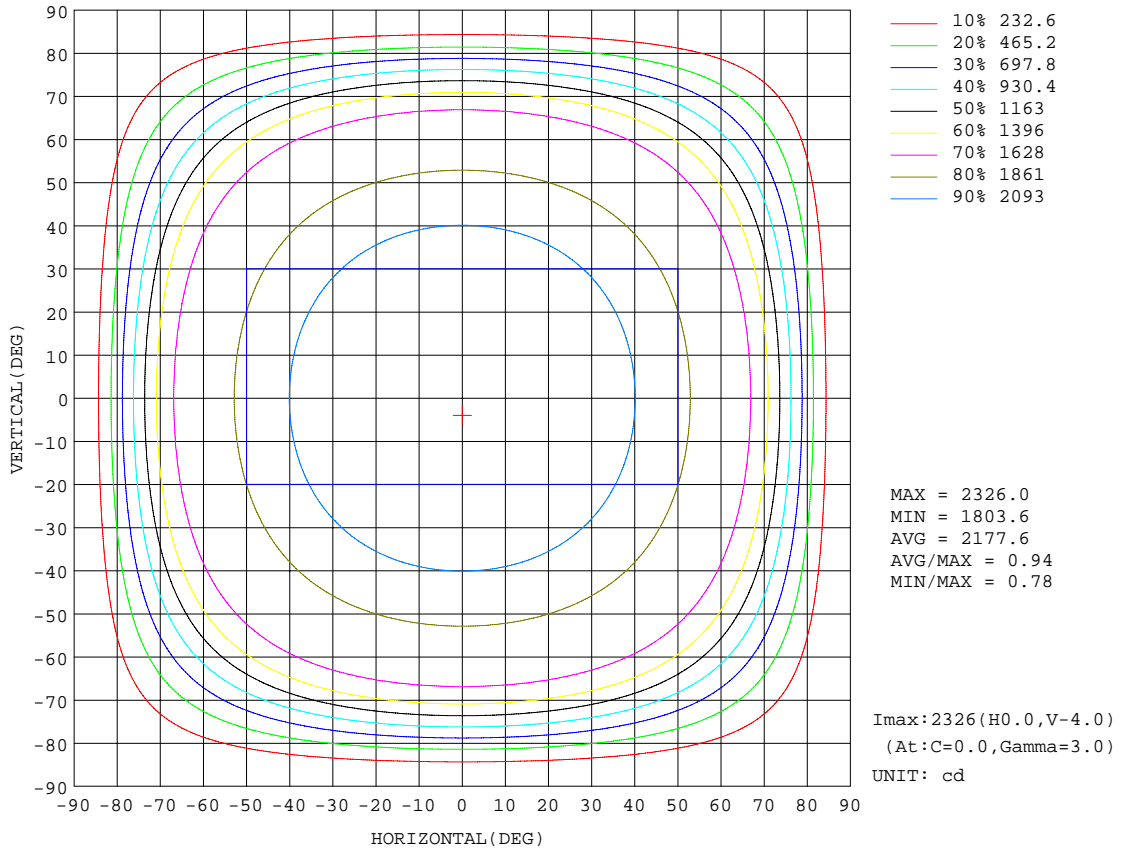


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature: 24.6DEG
 Operators: Monkey
 Test Date: 2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity: 45%
 Test Distance: 2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

AAI Figure

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

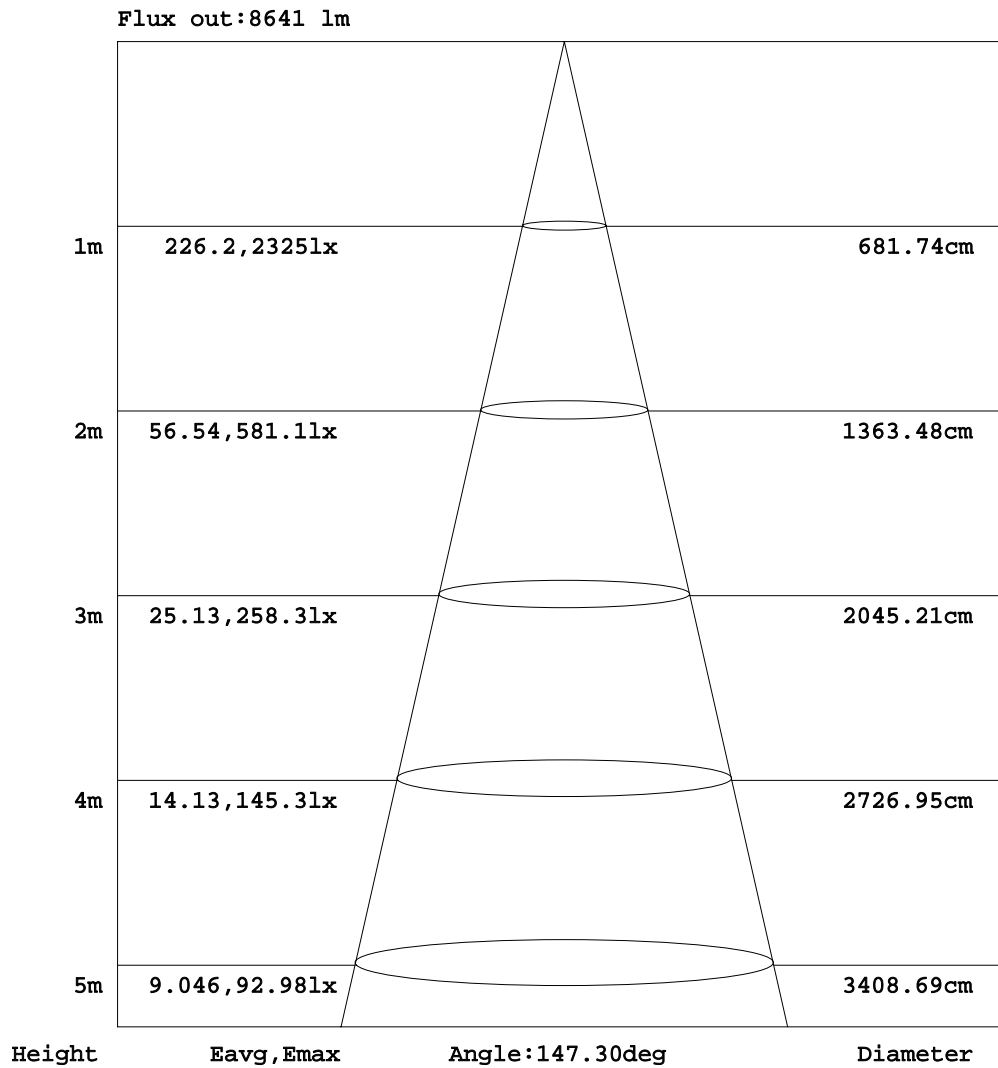

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature: 24.6DEG
 Operators: Monkey
 Test Date: 2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity: 45%
 Test Distance: 2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

ISOLUX DIAGRAM

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

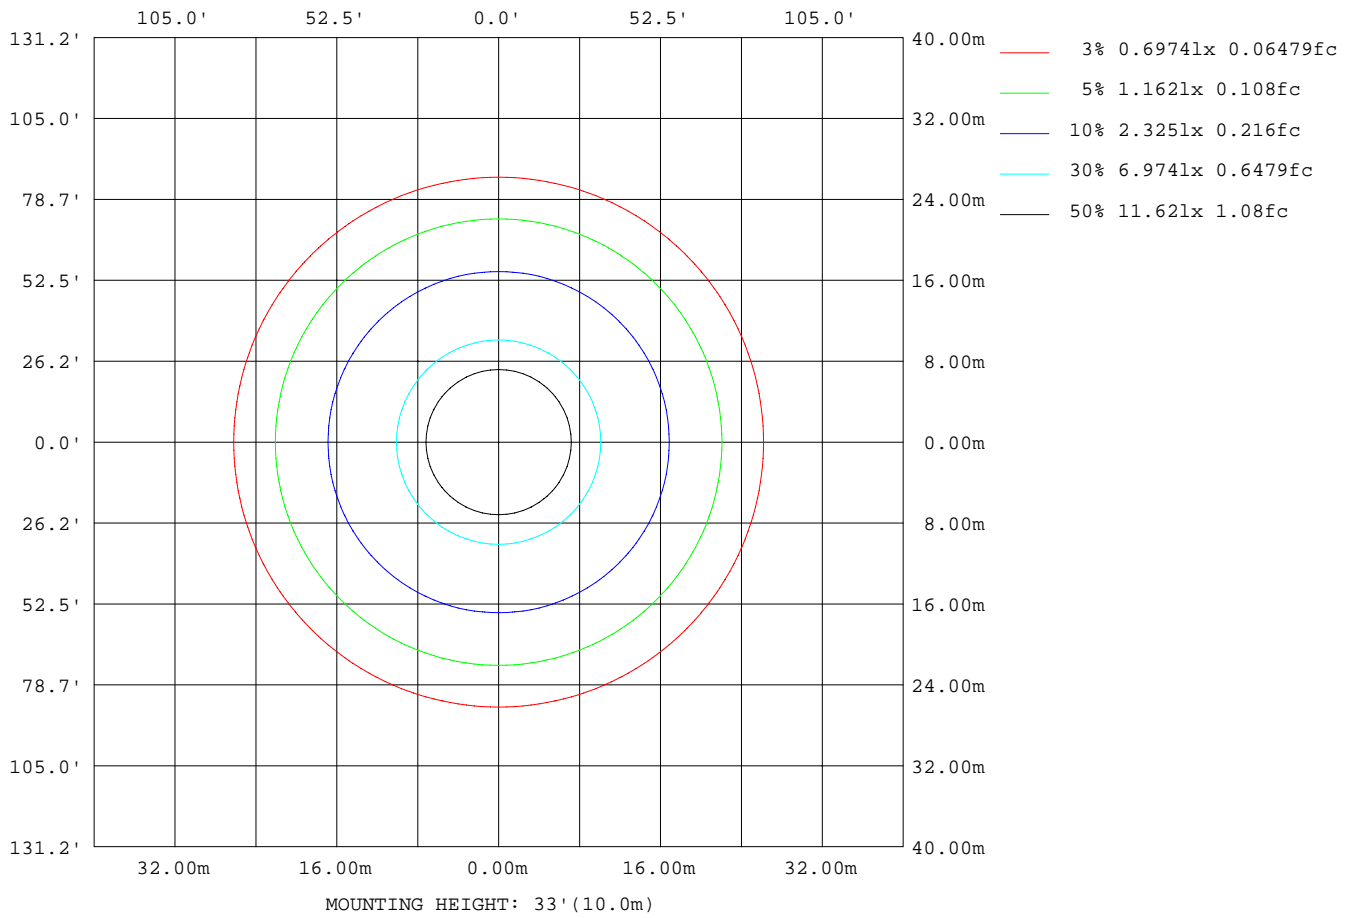

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

LED Avg.L Report

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A


AvgL	cd/m2
L_0~180 (65) av	20307
L_0~180 (75) av	20818
L_0~180 (85) av	11003
L_90~270 (65) av	20307
L_90~270 (75) av	20818
L_90~270 (85) av	11003
L_45 (65) av	20307
L_45 (75) av	20818
L_45 (85) av	11003

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks:

Planar Illuminance Curve

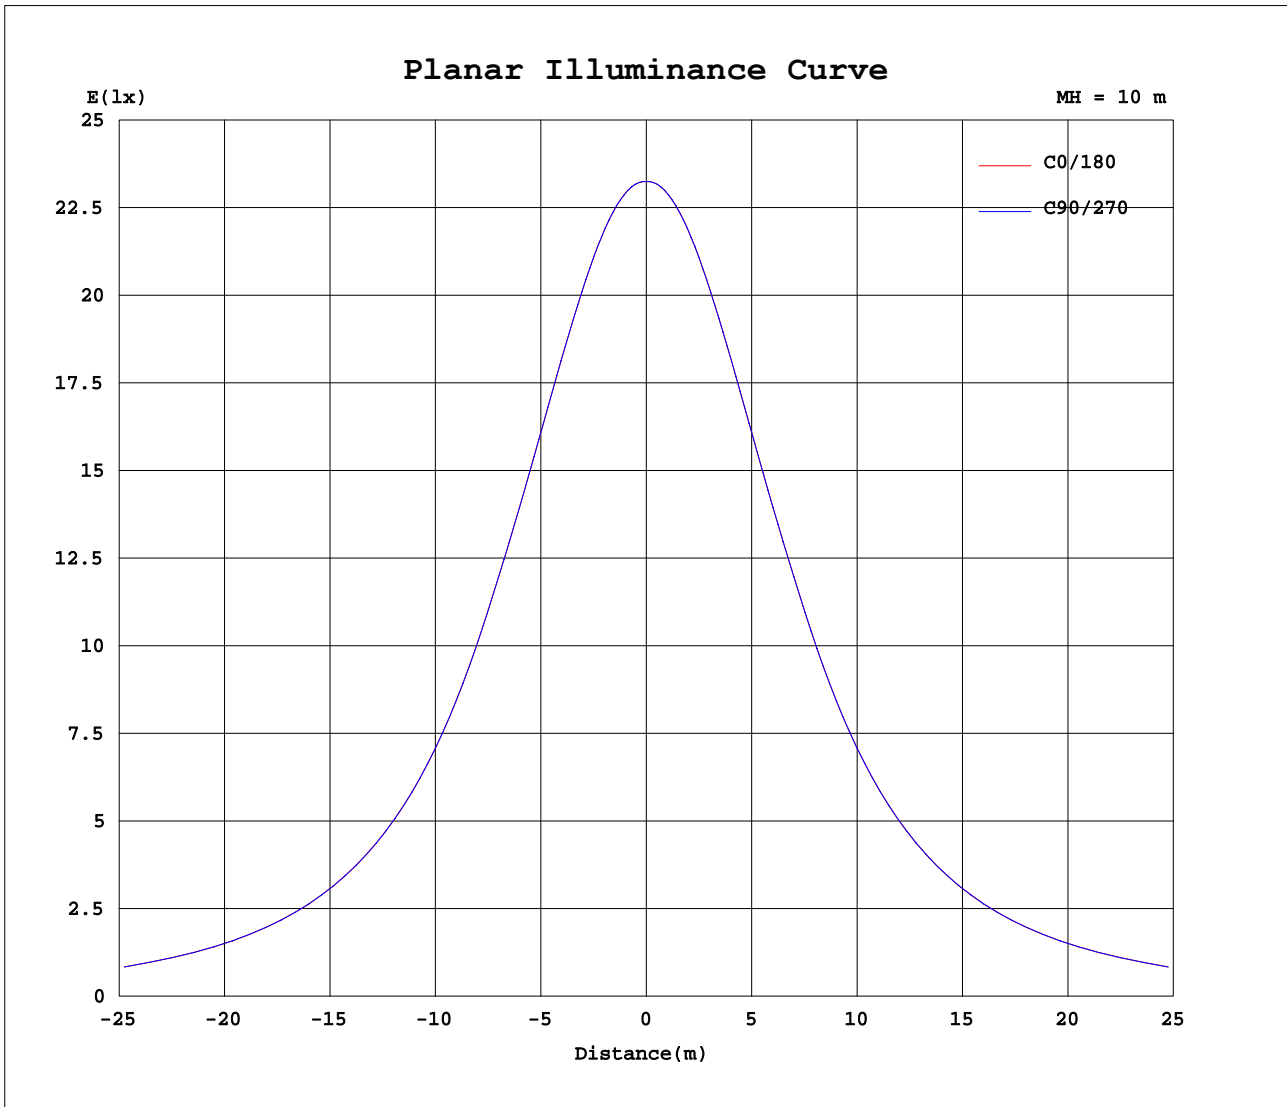

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature: 24.6DEG
 Operators: Monkey
 Test Date: 2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity: 45%
 Test Distance: 2.445m [K=1.0000]
 Remarks:

Date:	_____
Project:	_____
Price:	_____

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.5658A P:67.54W PF:0.9947 Lamp Flux:9451.92x1 lm		
NAME: Direct Linear Ambient Luminaires	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.:	SUR.:N/A	Shielding Angle:N/A

Table--1 UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325	2325			
5	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326	2326			
10	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319	2319			
15	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305	2305			
20	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284	2284			
25	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258			
30	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223	2223			
35	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177	2177			
40	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095	2095			
45	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002	2002			
50	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912	1912			
55	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824	1824			
60	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740	1740			
65	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662	1662			
70	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471	1471			
75	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043	1043			
80	591	591	591	591	591	591	591	591	591	591	591	591	591	591	591	591			
85	186	186	186	186	186	186	186	186	186	186	186	186	186	186	186	186			
90	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45	5.45			
95	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22
100	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32
105	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39	1.39
110	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45
115	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55
120	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74
125	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99
130	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31
135	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71	2.71
140	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18	3.18
145	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77	3.77
150	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36	4.36
155	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77	4.77
160	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10
165	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22	5.22
170	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24	5.24
175	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02	5.02
180	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67	4.67

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: 10.0deg/s
 Temperature:24.6DEG
 Operators:Monkey
 Test Date:2018-7-5

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:45%
 Test Distance:2.445m [K=1.0000]
 Remarks: