




i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

CUSTOM RECESSED MODULE

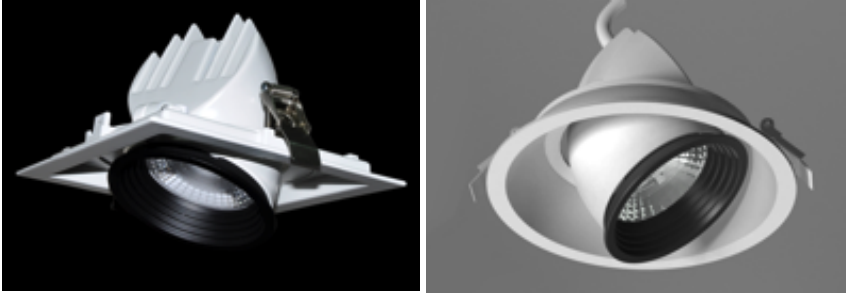

FEATURES

- Easy fit for 1x1, 1x2, 1x3
- 0-10V dimmable driver
- Mounting: Recessed.
- Available in white, black, or silver
- Interchangeable lens: 24, 38, 60, 80
- 7 Year Warranty
- Occupancy sensor options available
- Dimensions:

Single Square: 6.2 X 6.2IN cutout
 Single Circle: 6.4IN cutout
 Double Square: 6.2 X 13IN cutout
 Triple Square: 6.2 X 20IN cutout



SERIES NUMBER	SHAPE/ WATTS/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
IDRLCRMLKL	CR22W - 2,100	27K - 2700K	B - BLACK	DIM - 0-10V DIMMING
	CR43W - 4,100	3K - 3000K	W - WHITE	EM -EMERGENCY BACKUP
	SQ22W - 2,100 - Single	4K - 4000K	S - SILVER	MS - MOTION SENSOR
	SQ43W - 4,100 - Single	5K - 5000K		
	SQ44W - 4,200 - Double			
	SQ86W - 8,200 - Double			
	SQ66W - 6,300 - Triple			
	SQ129W - 12,300 - Triple			

SAMPLE ITEM NUMBER: IDRLCRMLKL 22W 3K W DIM
 SQ=SQUARE CR=CIRCLE







i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____


Photometrics




24°



38°



60°

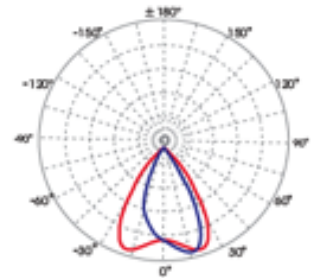

80°x45°

