



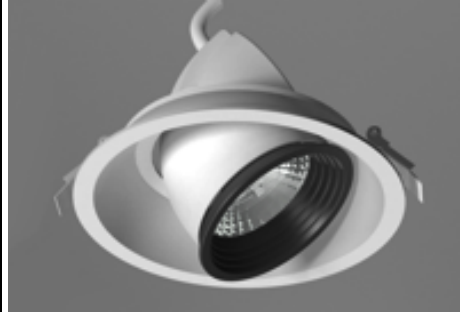

i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

CUSTOM RECESSED MODULE

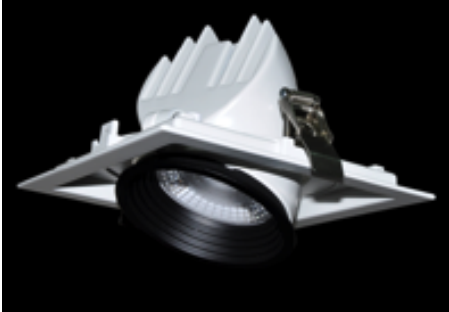

FEATURES

- Easy fit for 1x1, 1x2, 1x3, 1x4, 2x2
- 0-10V dimmable driver
- Multiple mounting options; recessed or pendant mounted
- Available in white, black, or silver
- Interchangeable lens: 24, 38, 60, 80
- 7 Year Warranty
- Occupancy sensor options available
- Dimmensions:



1x1



1x2



1x3



1x4



2x2



Round Spotlight

IDRLCRLKLI

SERIES NUMBER	SIZE/ WATTS/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
IDRLCRLKLI	22W - 2,100	27K - 2700K	B - BLACK	DIM - 0-10V DIMMING
	43W - 4,100	3K - 3000K	W - WHITE	EM -EMERGENCY BACKUP
		4K - 4000K	S - Silver	MS - MOTION SENSOR
		5K - 5000K		

SAMPLE ITEM NUMBER: IDRLCRLKLI 22W 3K W DIM







i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____


Photometrics

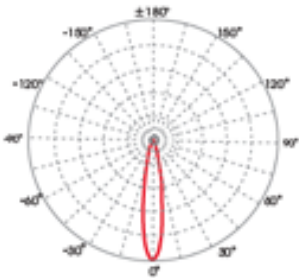


24°

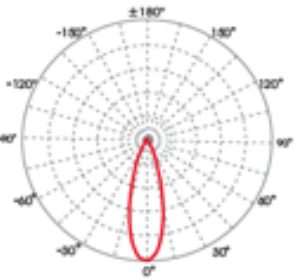

38°

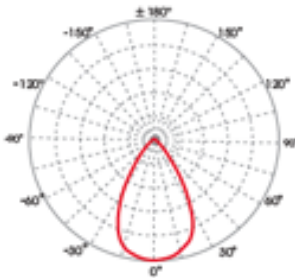

60°

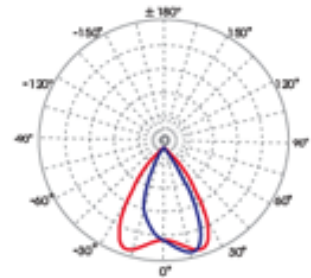

80°x45°

