

LED OUTDOOR CEILING LIGHT

Description:


Our LED Outdoor Ceiling Light ensures an even illumination across any surface. With a rating of IP65 & a variety of mounting options, this fixture is perfect for any application.

Features:

- Input Power: AC 120V, 50/60 Hz.
- Wattage: Varies See Chart
- CRI >90
- Available Color Options: 3000K, 4000K or 5000K.
- Available Mounting Options: Recessed or Wall Mounted.
- Available Design Options: Standard, Novo or Half Moon.
- L70 Lifetime: >50,000 hours.
- Sensor Options Available
- 0-10V dimming option available.
- Lighting controls option available.
- 7 Year Warranty.
- Dimensions: Vary based on pendant.



Standard

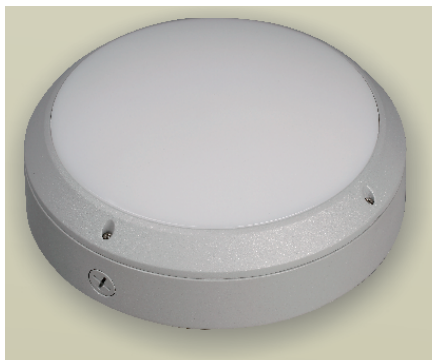



Novo



Half Moon




Photometrics:

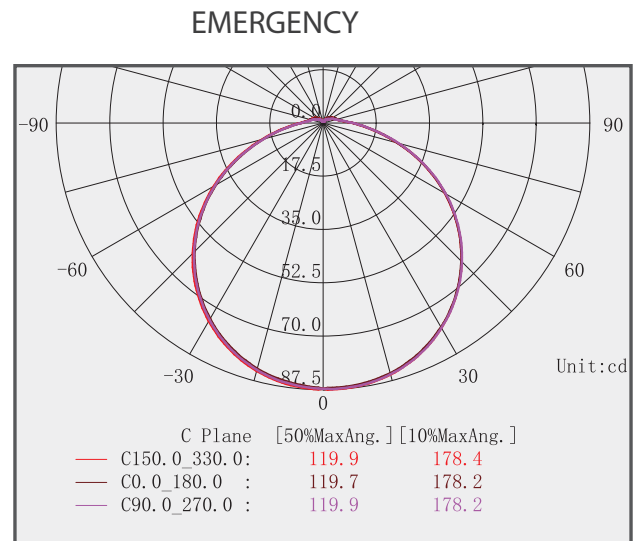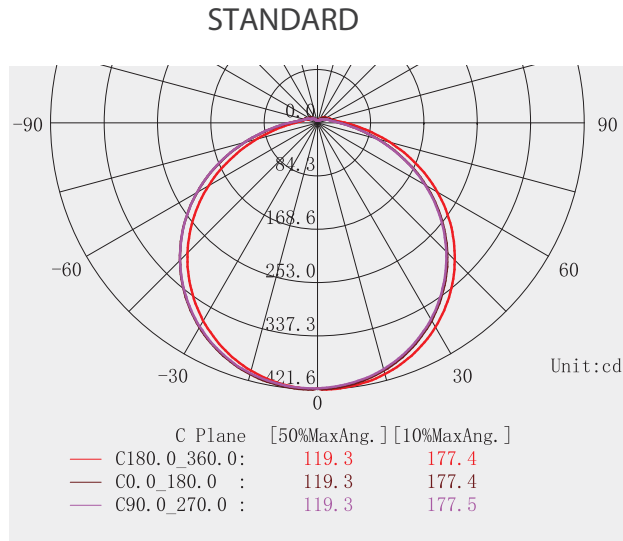

AC/DC Integrated Driver:




Built-in test button with indicator

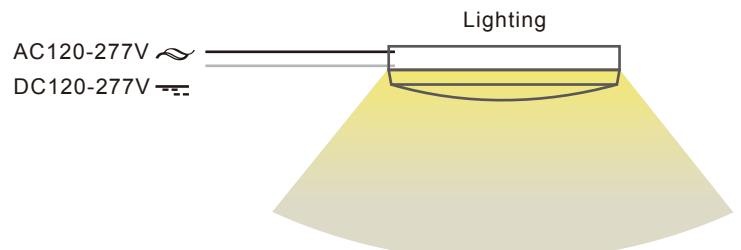

Date:	_____
Project:	_____
Price:	_____


Dimensions:



Standard
900LM



Standard
1000LM/1500LM



Standard
1500LM/3000LM


Ordering Key:

ILCPYODLM				
SERIES NUMBER	LUMENS/ WATTS/ SIZE/	CCT	FINISH	ADDITIONAL OPTIONS
ILCPYODLM	900 - 8.5w / 10.2IN	3 - 3000K		DM - 0-10V DIMMING
	900 - 9.5w / 10.2IN	4 - 4000K		EM - EMERGENCY BACKUP
	1000 - 10.5w / 13.4IN	5 - 5000K		MS - MOTION SENSOR
	1000 - 12.5w / 13.4IN			
	1500 - 16w / 13.4IN			
	1500 - 17.5w / 13.4IN			
	1500 - 14.5w / 15.8IN			
	1500 - 16w / 15.8IN			
	1500 - 17.5w / 15.8IN			
	3000 - 30.5w / 15.8IN			
	3000 - 31.5w / 15.8IN			
	3000 - 32.5w / 15.8IN			


SAMPLE ITEM NUMBER: ILCPYODLM 9009.5 4 DM



Dimensions:



Half Moon
600LM/750LM

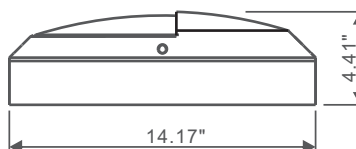

Half Moon
700LM/1000LM


Ordering Key:

ILLUHRCP				
SERIES NUMBER	LUMENS/ WATTS/ SIZE/	CCT	FINISH	ADDITIONAL OPTIONS
ILLUHRCP	600 - 8.5w / 10.4IN	3 - 3000K		DM - 0-10V DIMMING
	600 - 9.5w / 10.4IN	4 - 4000K		EM - EMERGENCY BACKUP
	750 - 11.5w / 10.4IN	5 - 5000K		MS - MOTION SENSOR
	750 - 12.5w / 10.4IN			
	700 - 9.5w / 14.2IN			
	700 - 10.5w / 14.2IN			
	700 - 12.5w / 14.2IN			
	1000 - 14.5w / 14.2IN			
	1000 - 16w / 14.2IN			
	1000 - 17.5w / 14.2IN			


SAMPLE ITEM NUMBER: ILLUHRCP 7509.5 4 DM



Dimensions:



NOVO
750LM/950LM

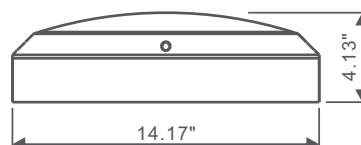

NOVO
850LM/1300LM



Ordering Key:

ILLUNRCP				
SERIES NUMBER	LUMENS / WATTS / SIZE	CCT	FINISH	ADDITIONAL OPTIONS
ILLUNRCP	750 - 8.5w / 10.4IN	3 - 3000K		DM - 0-10V DIMMING
	750 - 9.5w / 10.4IN	4 - 4000K		EM - EMERGENCY BACKUP
	950 - 11.5w / 10.4IN	5 - 5000K		MS - MOTION SENSOR
	950 - 12.5w / 10.4IN			
	850 - 9.5w / 14.2IN			
	850 - 10.5w / 14.2IN			
	850 - 12.5w / 14.2IN			
	1300 - 14.5w / 14.2IN			
	1300 - 16w / 14.2IN			
	1300 - 17.5w / 14.2IN			


SAMPLE ITEM NUMBER: ILLUNRCP 7508.5 4 DM






Description:

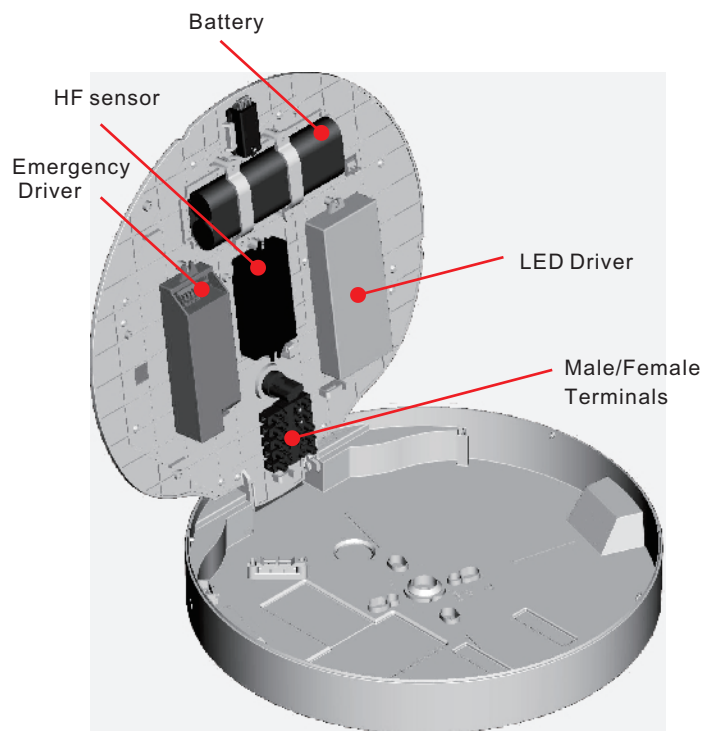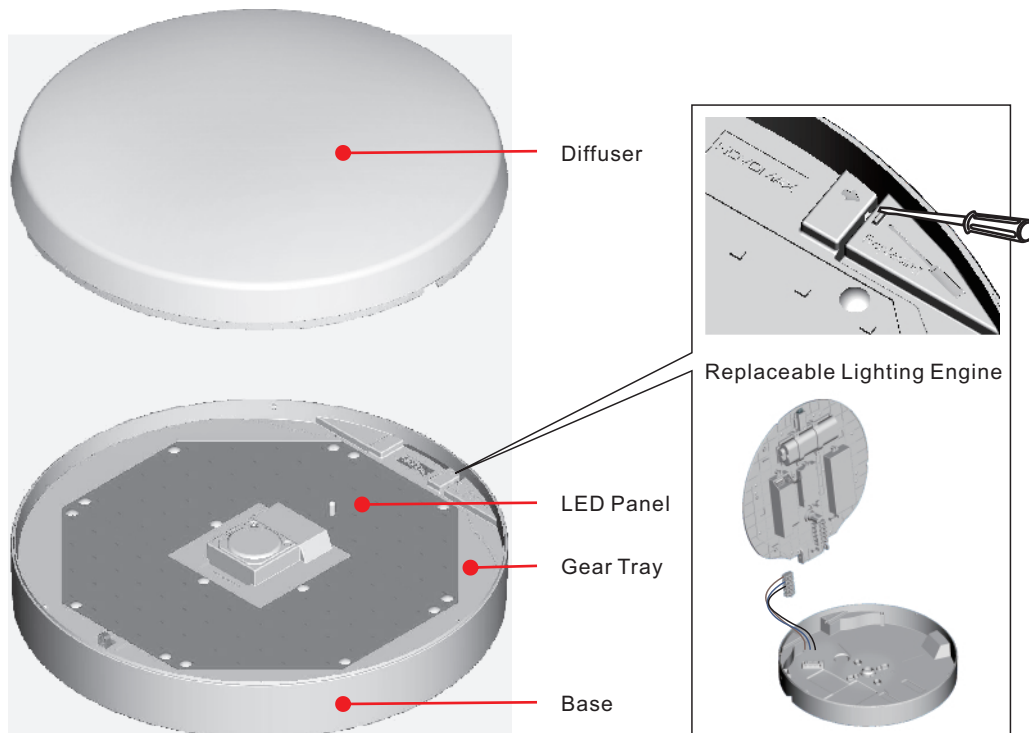

Sensor Options:



3-phase Dimmable
Driver

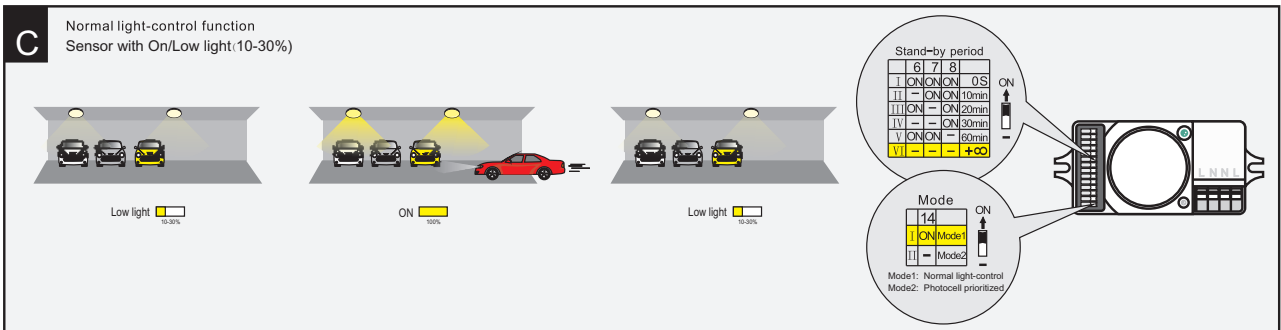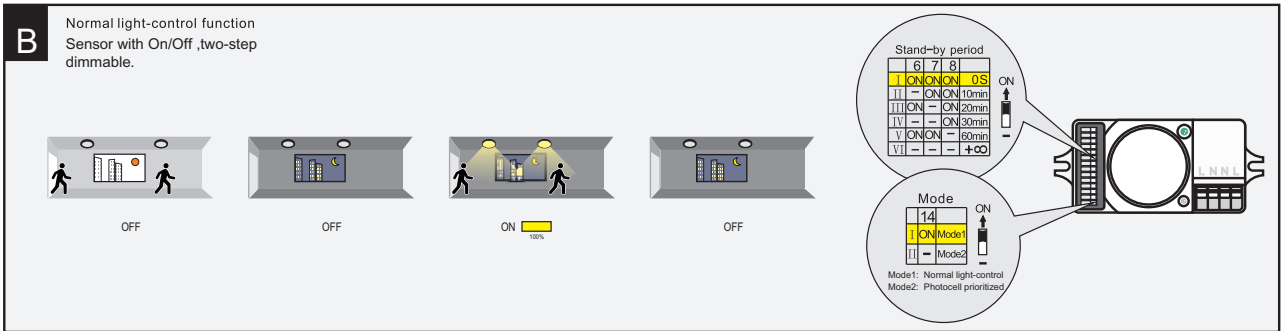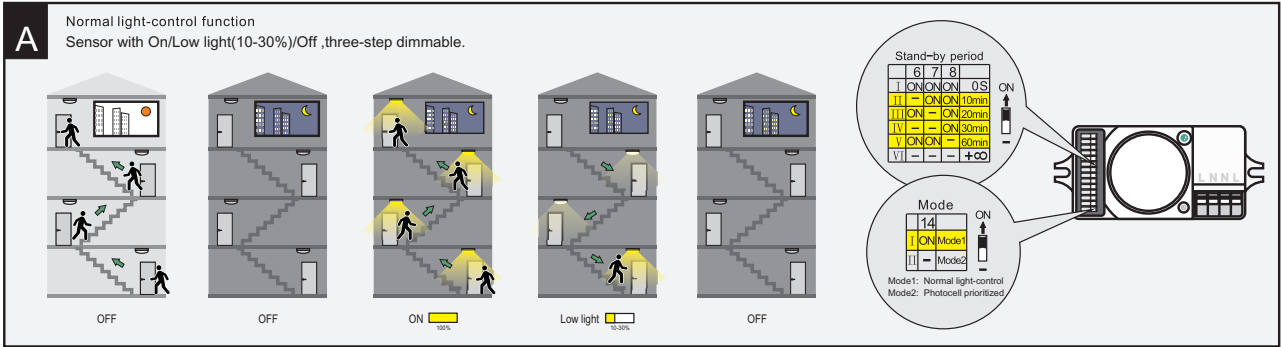

Ordering Key:

SERIES NUMBER	LUMENS/ WATTS/ SIZE/	CCT	FINISH	ADDITONAL OPTIONS
ILMPLHO	360 - 6w / 5.3 IN	3 - 3000K	RG - RED GOLDEN	DM - 0-10V DIMMING
	840 - 12w / 7.1 IN	4 - 4000K	BB - BRUSHED BRONZE	
	1260 - 18w / 8.9 IN	5 - 5000K	BN - BRUSHED NICKEL	
	1920 - 24w / 11.8 IN		PB - POLISHED BLACK	
	400 - 6w / 5.3 IN		PC - POLISHED CHROME	
	1000 - 12w / 7.1 IN			
	1530 - 18w / 8.9 IN			
	1920 - 24w / 11.8 IN			

SAMPLE ITEM NUMBER: ILMPLHO 840 4 BN DM

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture can be equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.