



Date: _____
Project: _____
Price: _____


CHELSEA LINEAR LIGHT

Description:




Our Chelsea Linear Light ensures an even illumination across any surface. Easily **LINKABLE** to create any length or shape. With an IP40 rating and multiple mounting options, this fixture is perfect for offices, retail locations, or lobbies.

Features:

- Input Power: 100~240VAC
- Housing Material: Aluminum + PC cover
- Wattage: 21W/31W/43W/61W
- 5.3 W/FT
- 745 LM/FT
- IP Rating: IP40
- CRI >90
- Available Color Options: 2700K, 3000K, 3500K, 4000K or 6000K.
- Available Mounting Options: Surface, Wall, or Suspended.
- Beam Angle: 96°
- Custom lengths available upon request.
- L70 Lifetime: >50,000 hours.
- Available Finish Options: Silver, White, Black, Red, or Gold.
- 0-10V dimming option available.
- Lighting controls option available.
- 7 Year Warranty.




Dimensions:



*** Custom Lengths Available ***

Installation Accessories:



- Pendant



IL-PTB



IL-PT



IL-PTB-NPF



IL-PTB-PF



- Ceiling mounted

IL-SM



- Wall mounted



IL457-WM

IL-PTB: pendant wires with canopy

IL-PT: pendant wires without canopy


IL-PTB-NPF: pendant wire+ canopy without cable hole

IL-PTB-PF: pendant wire+ canopy with cable hole

IL-SM: screw for ceiling mounted

IL457-WM, wall mounted clip

Disassembly Accessories:

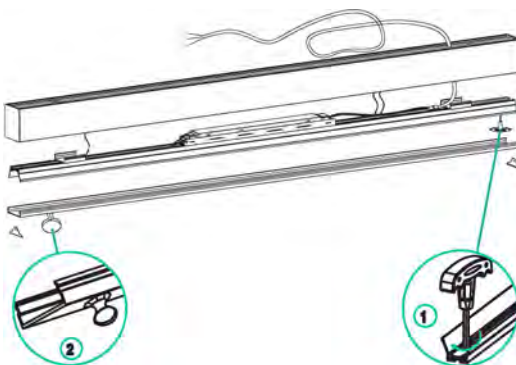

IL-DA-D



IL-DA-A

IL-DA-D: disassembly tool

IL-DA-A: Rubber sucker



Ordering Key:

ILLCLBV				
SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILLCLBV	21W - 4FT/ 2,100	27 - 2700K	S - SILVER	DM - 0-10V DIMMING
	31W - 4FT/ 3,100	3 - 3000K	WH - WHITE	MS - MOTION SENSOR
	43W - 8FT/ 4,300	35 - 3500K	BL - BLACK	EM - EMERGENCY BACKUP
	61W - 8FT/ 6,100	4 - 4000K	R - RED	LV - LOUVER
	X - CUSTOM LENGTH	6 - 6000K	GD- GOLD	

SAMPLE ITEM NUMBER: ILLCLBV 31 4 S DM



Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-240 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture is equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Photometrics:

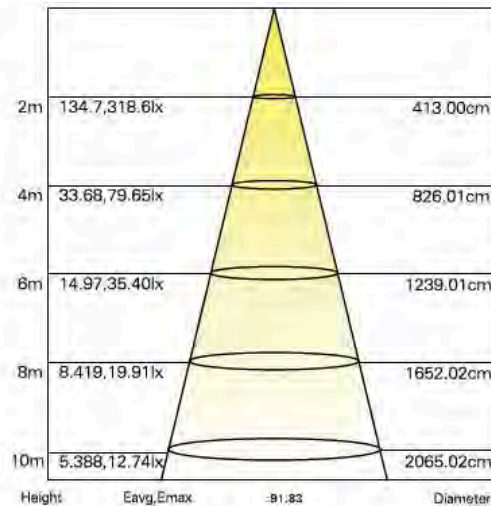


Optical System:


- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.




Connectors:




ITEM NUMBER: LL



90L sets




Mechanical connection




Electrical connection


Dimension: L609.6mm(2ft) * W609.6mm(2ft)




ITEM NUMBER: TC



90T sets




Mechanical connection




Electrical connection


Dimension: L1219.2mm(4ft) * W609.6mm(2ft)




ITEM NUMBER: XC



90X sets




Mechanical connection




Electrical connection


Dimension: L1219.2mm(4ft) * W1219.2mm(4ft)




ITEM NUMBER: CC



90N sets




Mechanical connection




Electrical connection


Dimension: L609.6mm(2ft) * W609.6mm(2ft)




ITEM NUMBER: VC



90W sets



Mechanical connection



Electrical connection

Dimension: L609.6mm(2ft) * W609.6mm(2ft)

Connection Ordering Key:

ILLCLBV			
SERIES NUMBER		CONNECTION	ADDITONAL OPTIONS
ILLCLBV		LL - L SHAPED CONNECTOR	
		TC - T SHAPED CONNECTOR	
		XC - X SHAPED CONNECTOR	
		CC - CORNER SHAPED CONNECTOR	
		VC -V SHAPED CONNECTOR	