



i-LUMINOSITY
LED LIGHTING FIXTURES

Infinite Magnetic Track


Item #: ILDCIMDL




Applications

0126 ME series can be freely assembled in different ways of lighting effects, continuous linear lighting, can also focus on the gap lighting, because it has a magnet function, so you can quickly install and replace.

0126 ME Headliner can be used recessed, suspended and surface mounted .

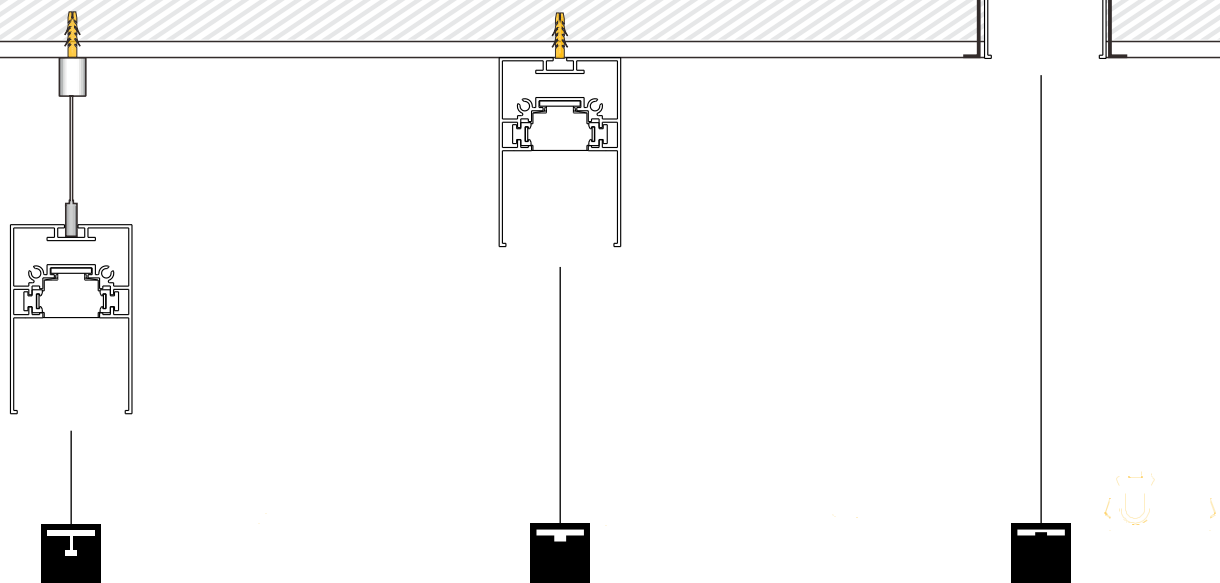



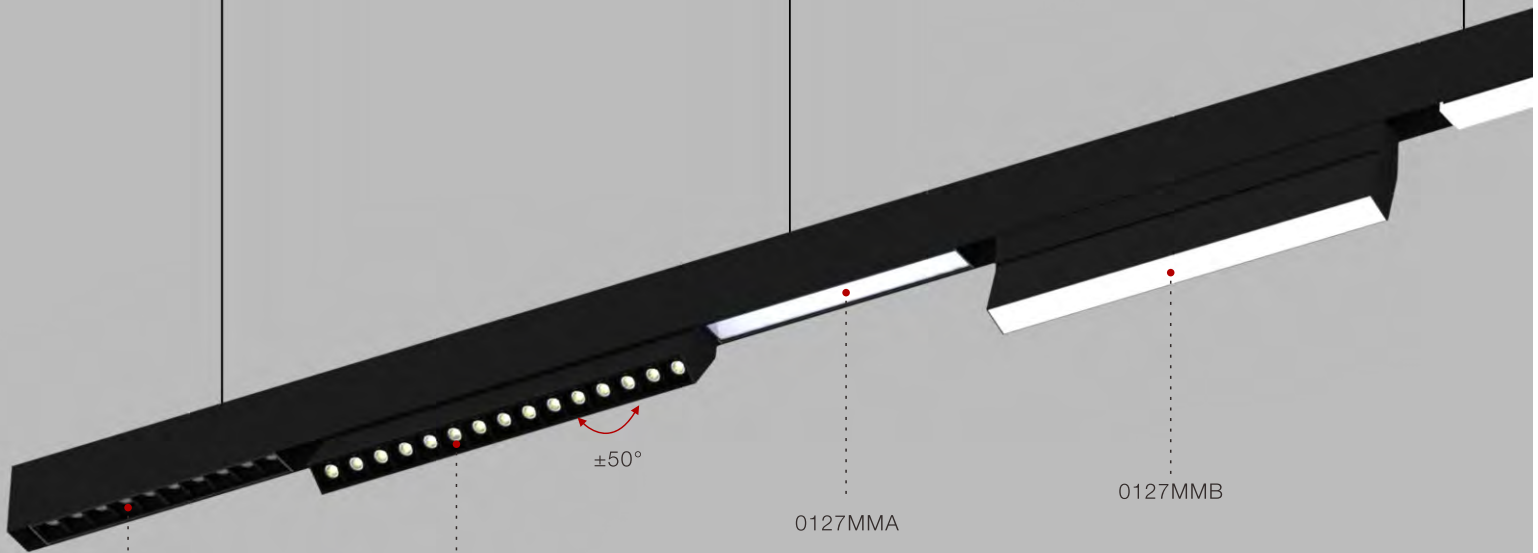


0126MMA

0126MMB

$\pm 50^\circ$

0127MMA

0127MMB

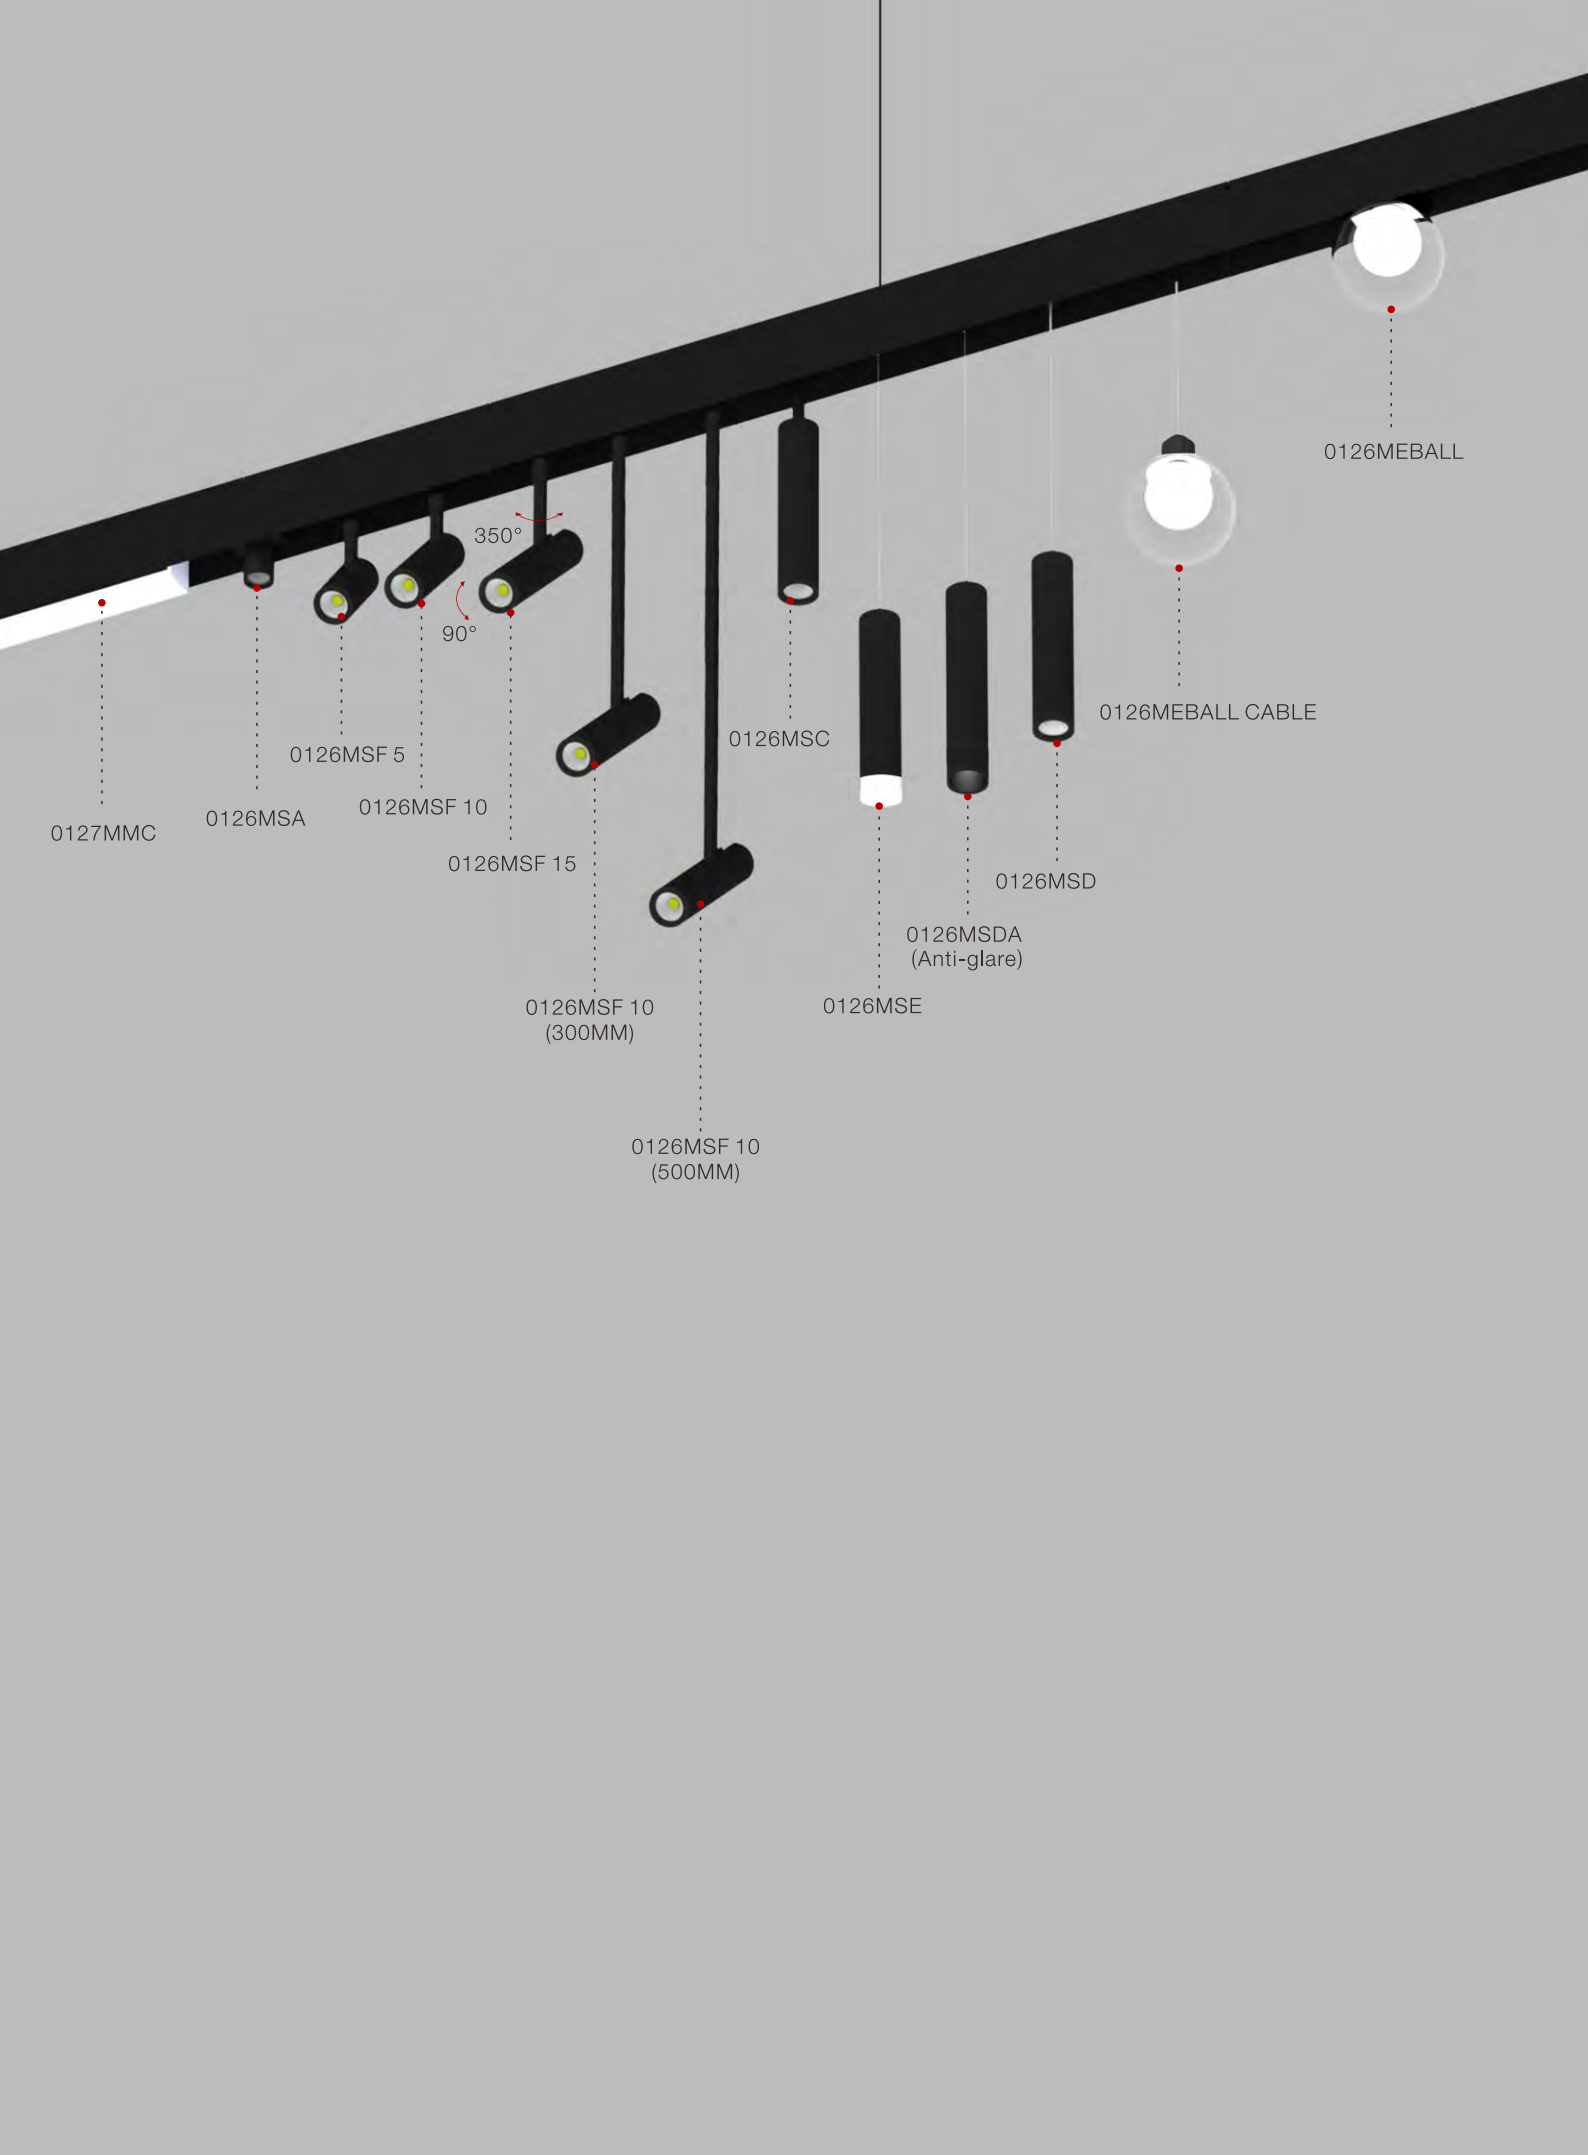

0127MMC

0126MSA

0126MSF 5

0126MSF 10

0126MSF 15

0126MSF 10
(300MM)

0126MSF 10
(500MM)

0126MSC

0126MSE

0126MSDA
(Anti-glare)

0126MSD

0126MEBALL CABLE

0126MEBALL

350°

90°

Analysis of Magnetic System Structure

- Safe and reliable, through the pull test. Easy maintenance, rapid replacement without tools.




Safety



Test items and test requirements	Test instruction	Determination
Lamp head pull test: The pull of the lamp head out of the lamp base is at least 4 times the weight of the lamp base.	Lamp weight: 0,8kg 4 times the weight of the lamp head pull: 31,36N Lamp head pulls off from lamp holder: 34N for the first time 39N for the second time	Pass

- Magnetic linear light system operates with various kinds of lamps, meeting the needs of different applications.

- DC24V output, safety guarantee.

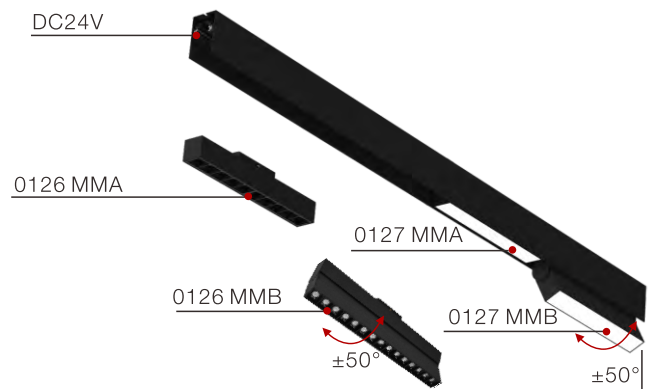





Example of suspended installation

Appliance suitable for suspended, ceiling or semi-recessed installation; shown here in the single suspension version with sliding cables.







Kit for suspension with sliding cables. Variable distancing between anchor points.

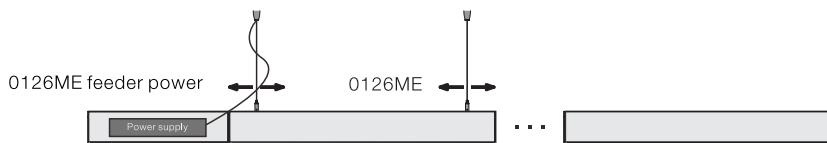

Example of the connection between linear

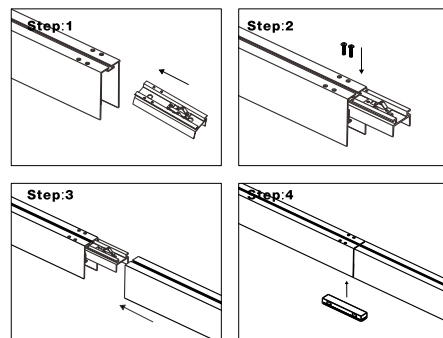

Installation

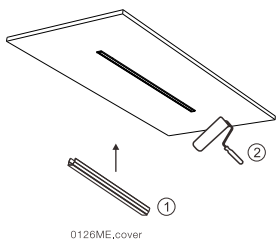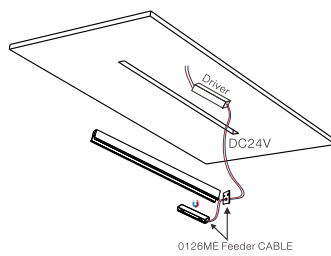


Dimmable


Thanks to the advancement of wireless technology and intelligent systems, we have upgraded the wireless operation of the lamps to a new level of technology. This smart dimming application can easily turn on or off the lighting fixtures and adjust the brightness through any smart device (such as a mobile phone, tablet computer, computer, or intelligent control panel) that carries Bluetooth functions.




Installation diagram

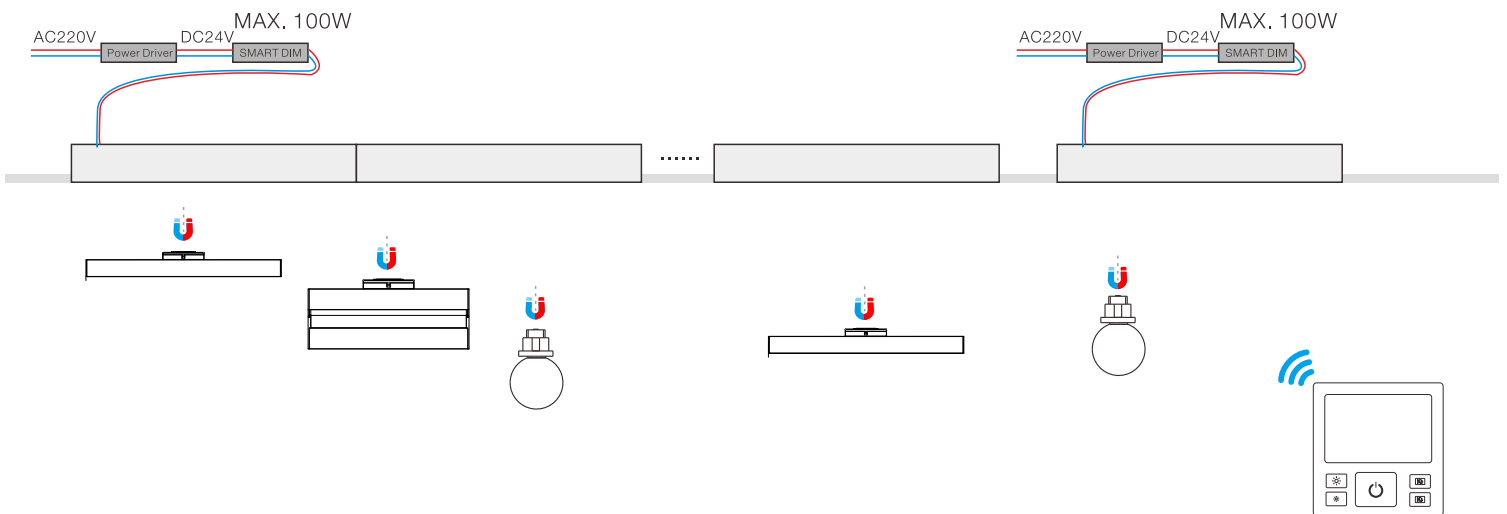

Dimming effect chart

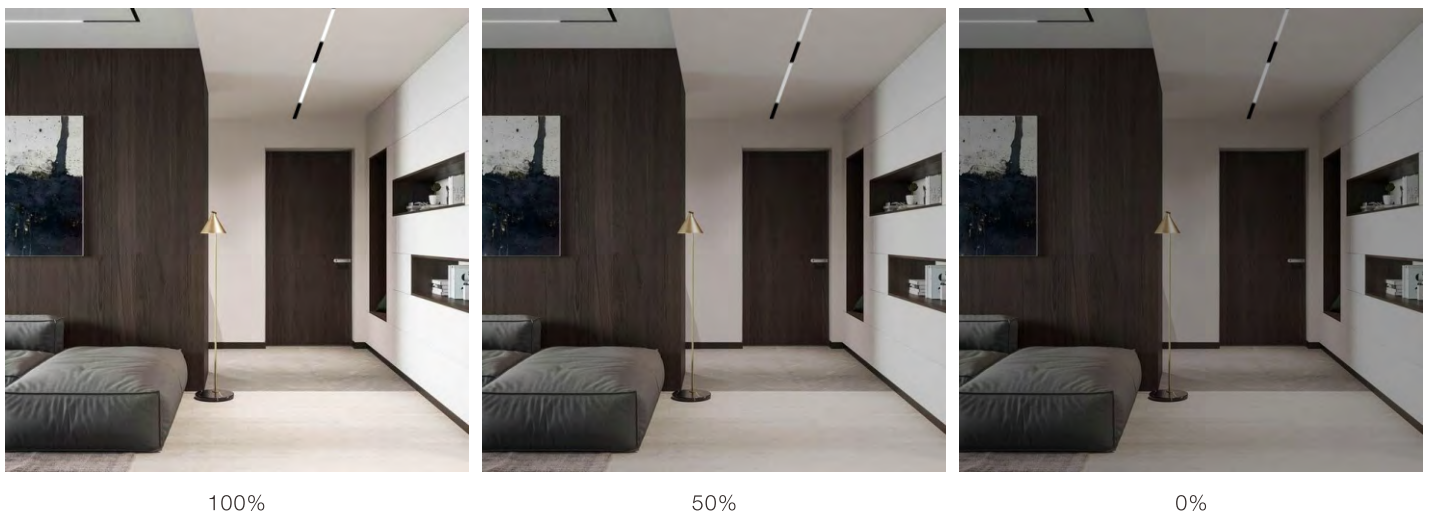




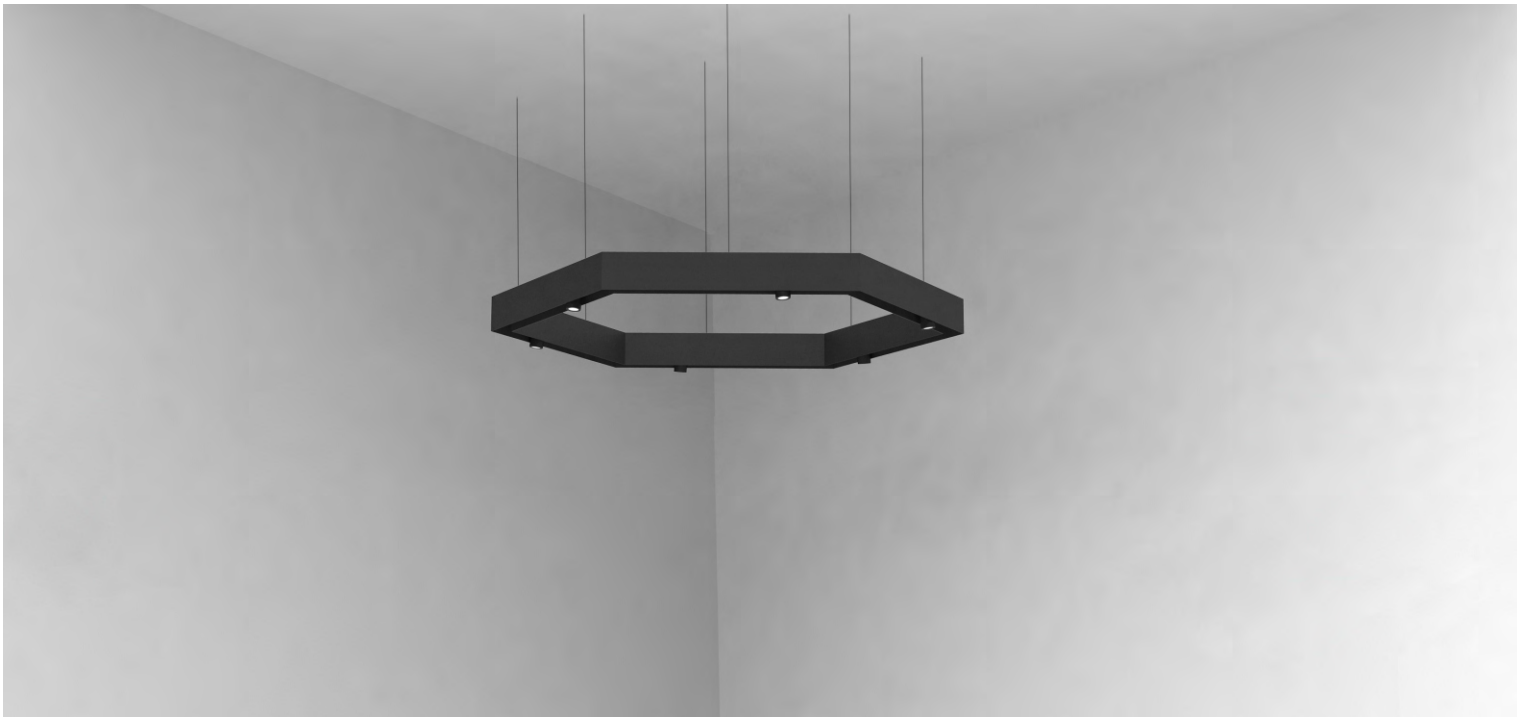




This model can only do suspend or surface mounted

Installation exploded view

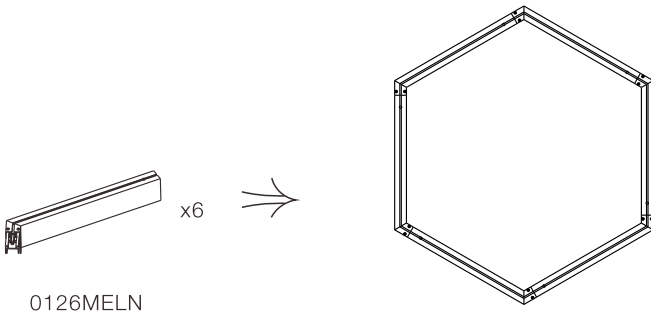



0126MELN

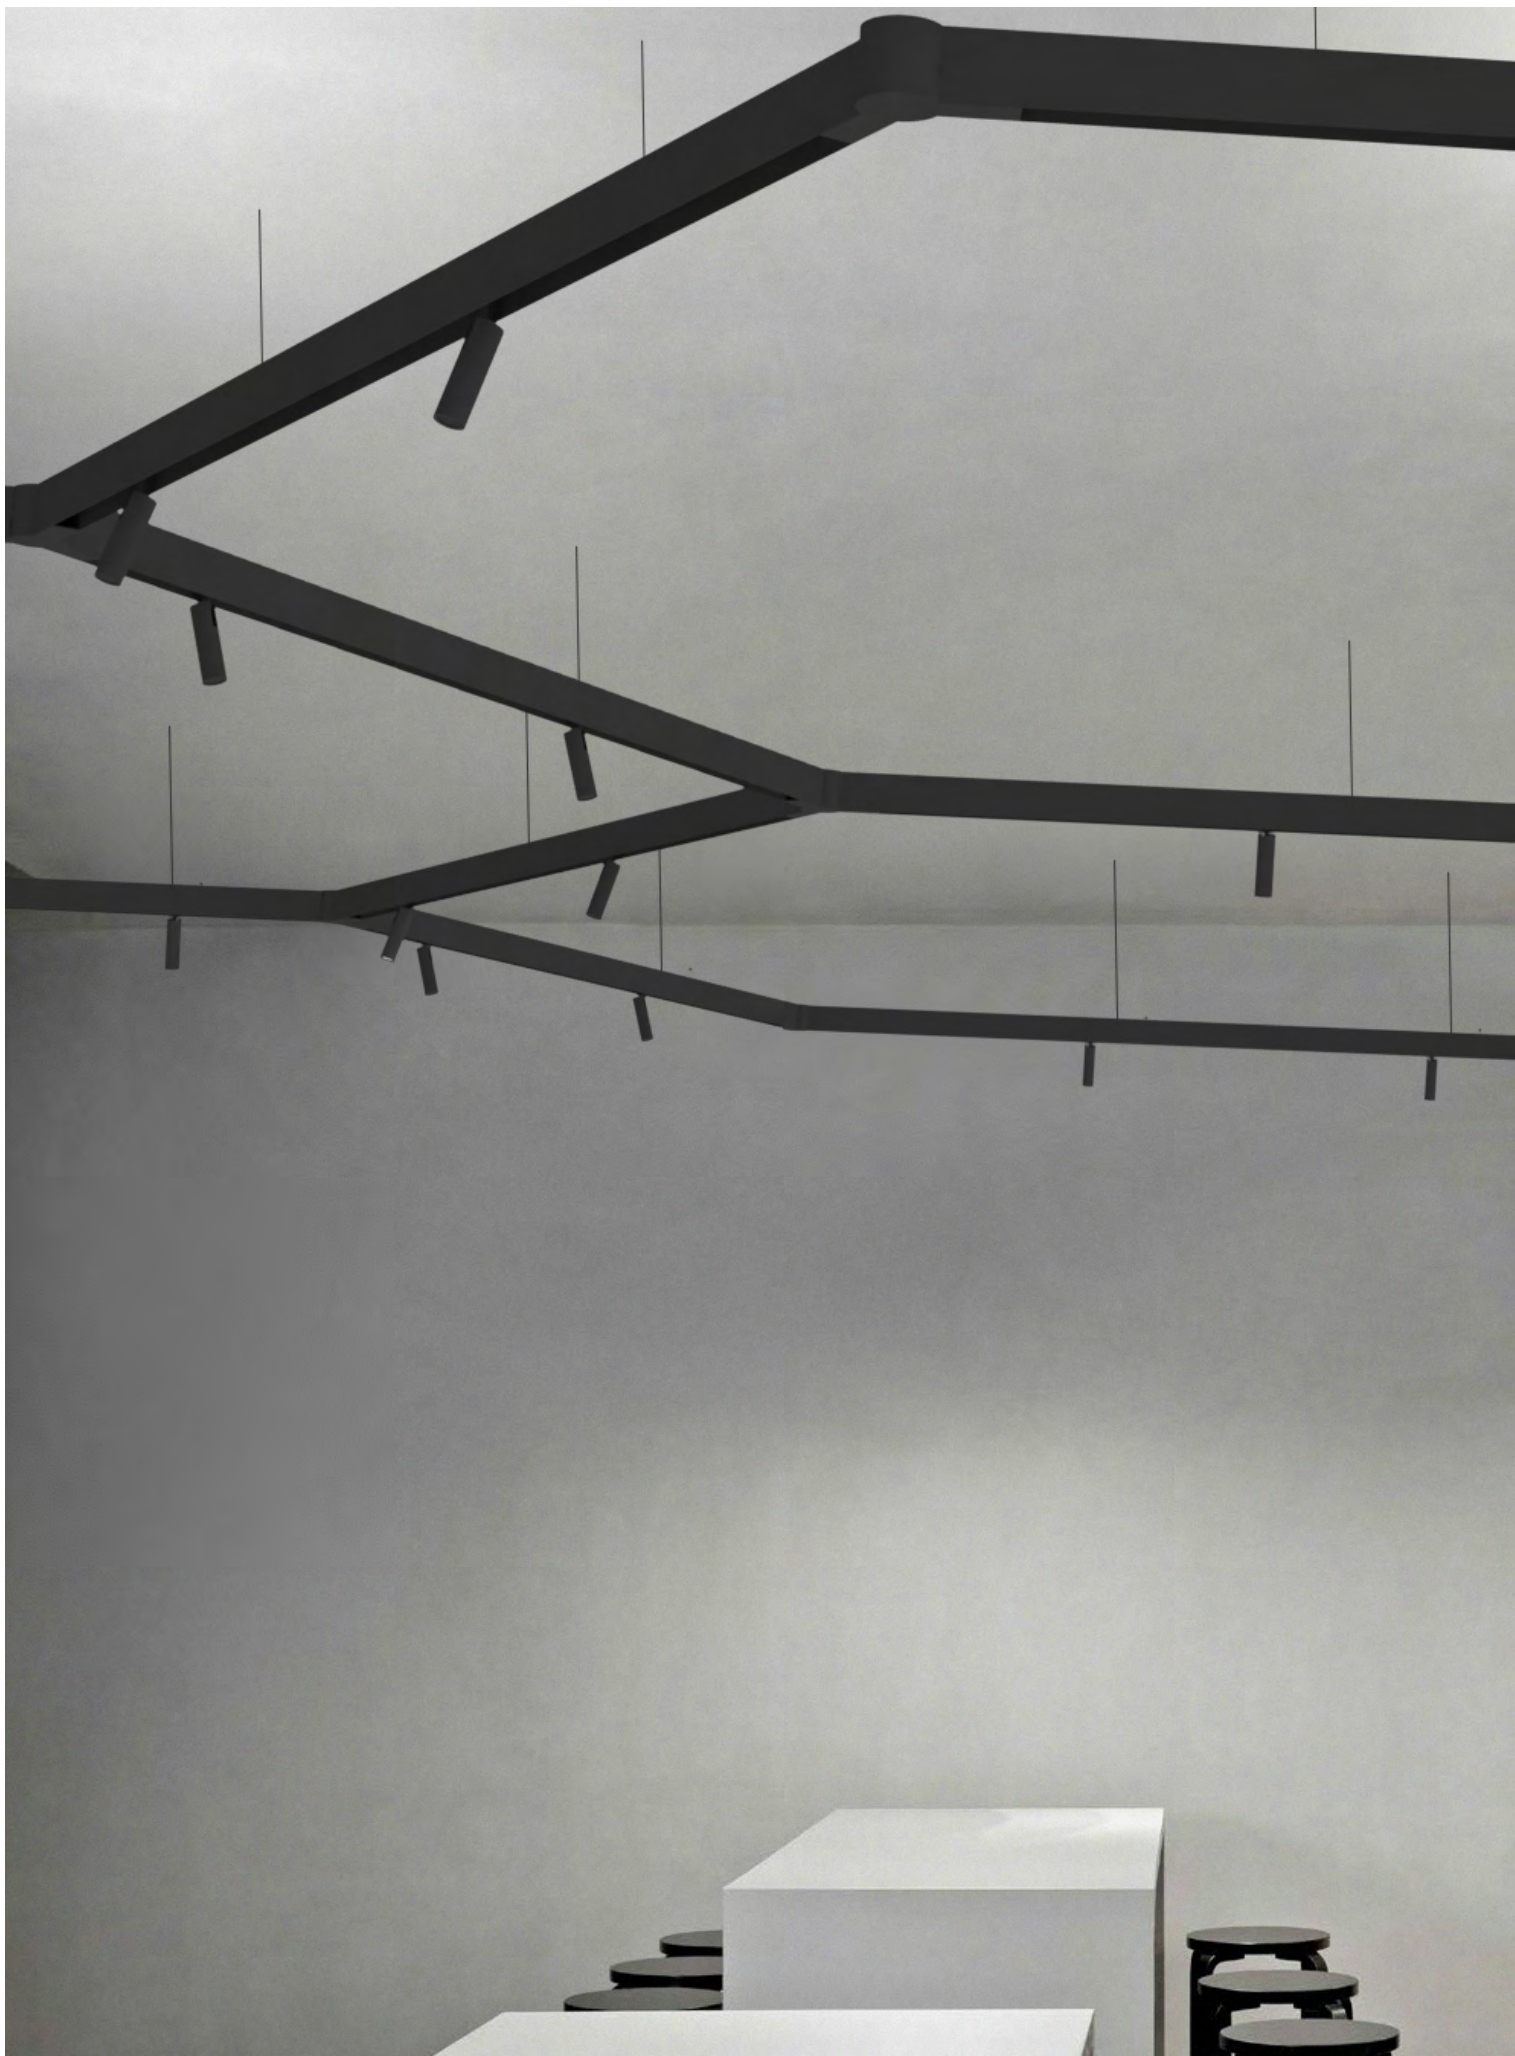

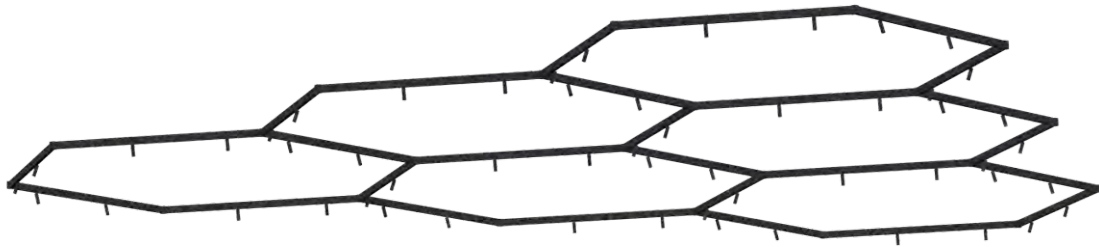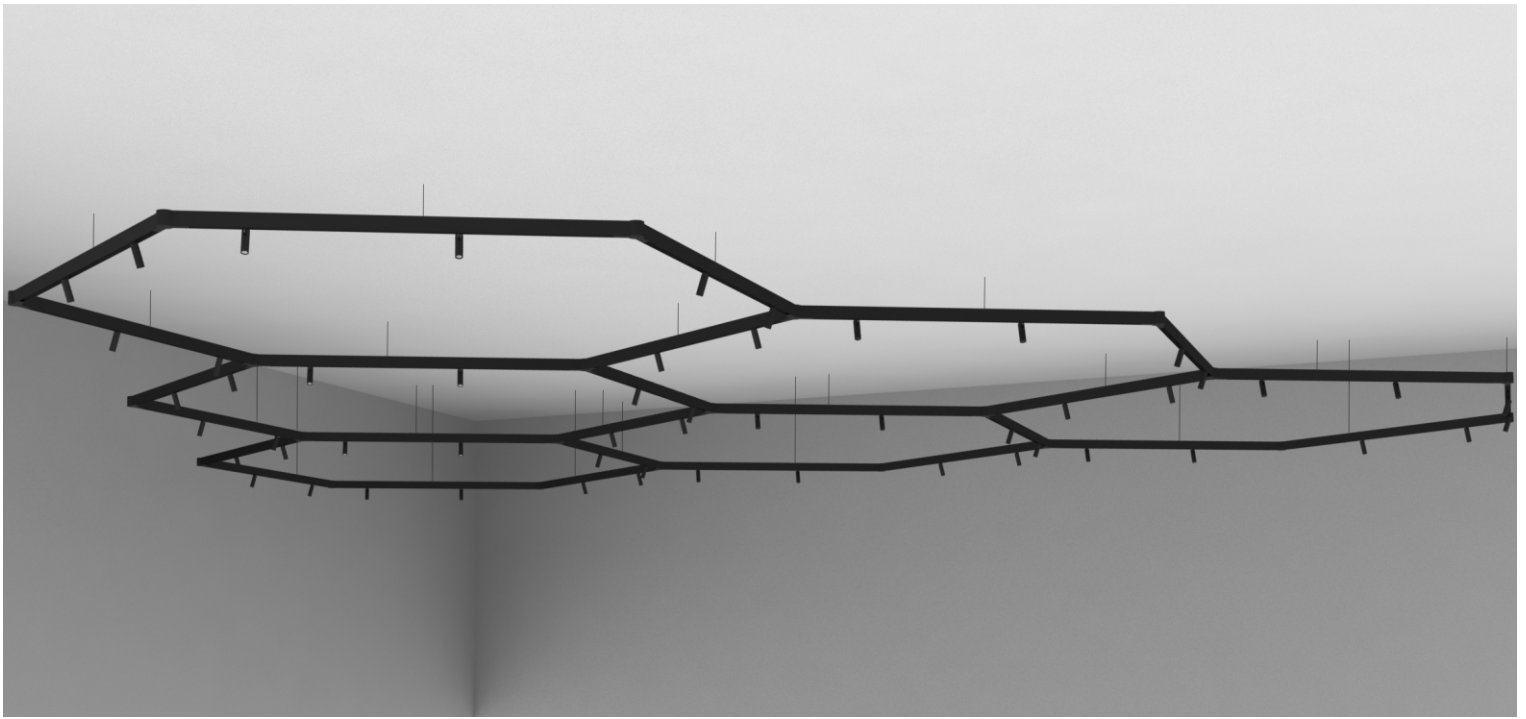


This model can only do suspend or surface mounted


Installation exploded view

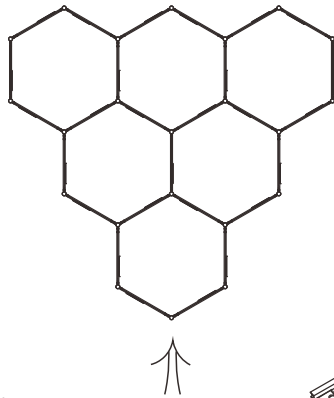


x12



x10



x54



x27

0126MEN Corner V60°


0126MEN Corner 3V60°

0126 ME connector kit

0126 MEN



Product information

0126MMA 15

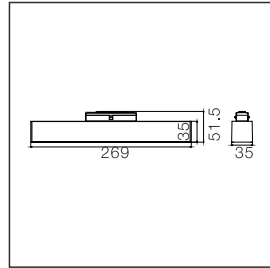


Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MMA 22

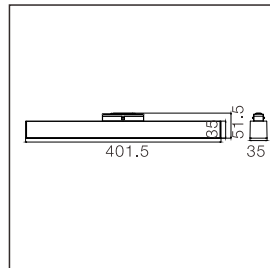


Power	22W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MMB 15



Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	12000-13000 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MMB 22

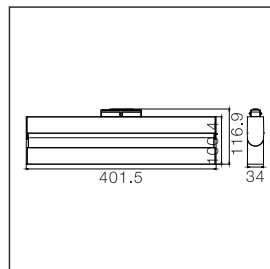


Power	22W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

Product information

0127MMA 15




120°

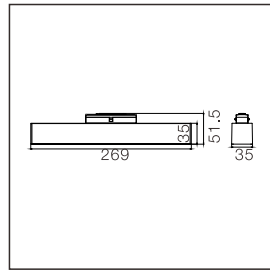


Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0127MMA 22



120°




Power	22W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0127MMB 15



120°




Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0127MMB 22





120°



Power	22W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H



Product information

0127MMC 15




Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0127MMC 22

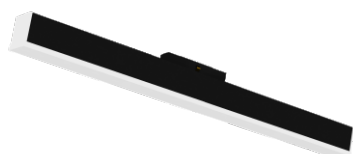


Power	22W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126BALL 5

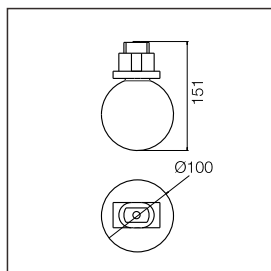

Power	5W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H


0126BALL CABLE 5

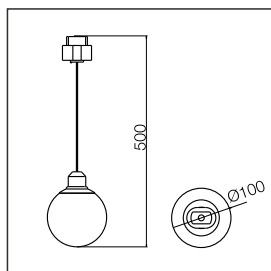

Power	5W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H


Product information

0126MSA 5




Power	5W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MSF 5





Power	5W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MSF 10



Power	10W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H


0126MSF 15



Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H



Product information

0126MSS 8




Power	8W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	640 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MSF.CIRCLE 5

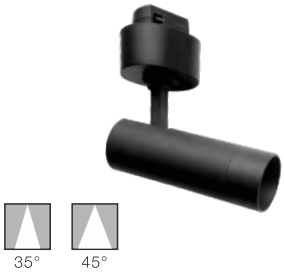


Power	5W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H

0126MSF. CIRCLE 10



Power	10W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H



0126MSF.CIRCLE 15



Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H


Product information

0126MSC 10




Power	10W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MSD 10




Power	10W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MSDA 10



Power	10W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H



0126MSE 15



Power	15W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+PMMA
Color	Black
Life	30 000 H


Product information

0126ME.cover

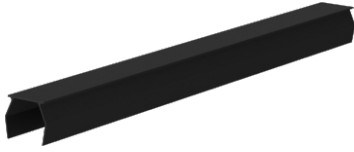


Material PVC
Color Black

Wireless switch panel

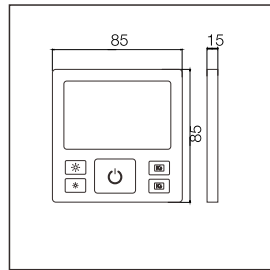


Material Plastic
Color White

SMART DIM



Power Max. 100W
Material Plastic
Color White


0126 ME Connector Kit

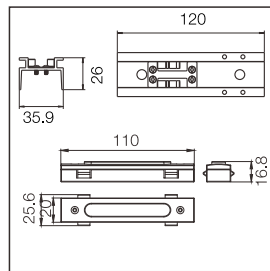

Material Aluminum
Color Black


Product information

0126MEN

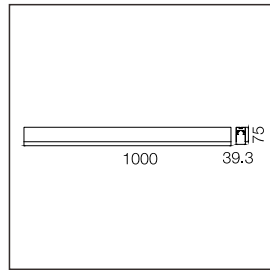


Material Aluminum
Color Black

0126MECN

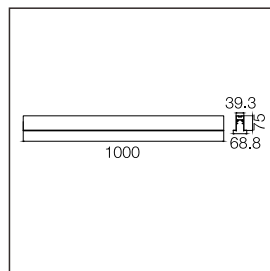


Material Aluminum
Color Black

Cap 0126ME



Material Aluminum
Color Black


0126ME Feeder CABLE



Material Aluminum
Color Black


Product information

0126MEN corner H




Material Aluminum
Color Black

0126MEN corner V




Material Aluminum
Color Black

0126MECN corner H



Material Aluminum
Color Black


0126MECN corner V



Material Aluminum
Color Black


Product information

0126MELN

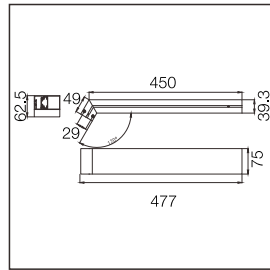


Material Aluminum
Color Black

0126MEN Corner V 60°




Material Aluminum
Color Black

0126MEN Corner 3V 60°



Material Aluminum
Color Black


0126ME feeder



Material Aluminum
Color Black


Product information

0126ME Feeder Power




Power	Max. 180W
Material	Aluminum
Color	Black

S-mouted

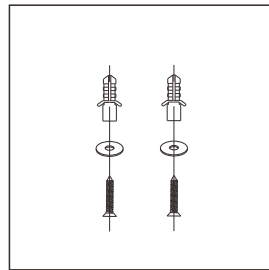

Material	Iron
Color	Chrome

Cable 70



Material	Aluminum
Color	Black

0126ME high power light

0126 me high power light apply to need high brightness places such as supermarkets, lobby, stores...



0138MMA
1000mm length
30W
3000 lumen output



0126MSF
30W / 40W




0127MMB
30W

Product information

0138MMA 30



120°

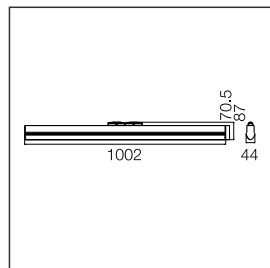


Power	30W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0127MMB 30




120°

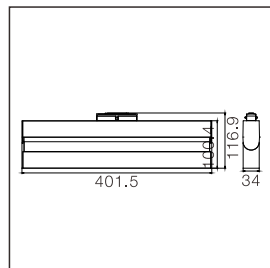

Power	30W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H


Product information

0126MSF 30

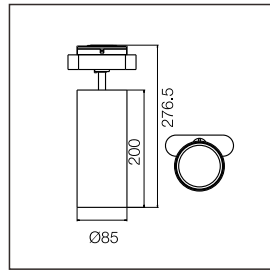

Power	30W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H

0126MSF 40

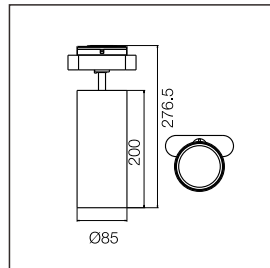


Power	40W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	3200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H



0126ME MAGNETIC LINEAR LIGHTING SYSTEM

asymmetrical lighting solutions


0127ASY

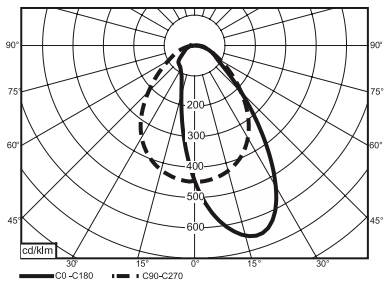

0127DASY

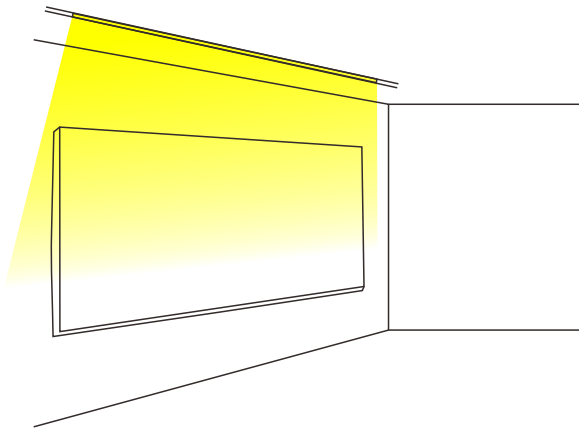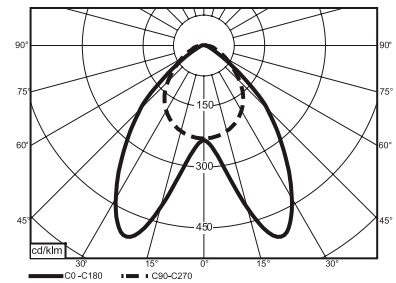


The design and application of single polarized optics in the art gallery. Continuous installation creates a perfect single-polarized wall-washing effect, making it easy for visitors to enjoy paintings in a comfortable lighting environment.

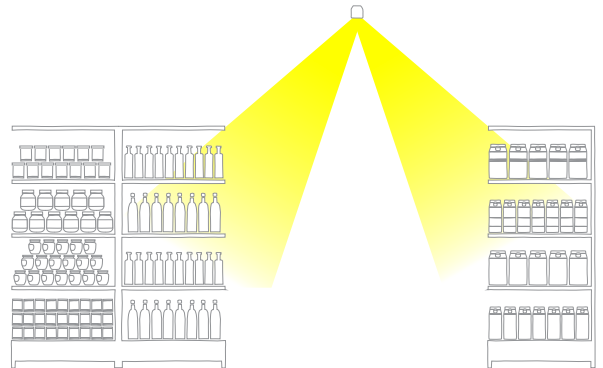


The design of dual polarized optical components in the central lane of the supermarket. Achieve the dual functions of comfortable general lighting and accent lighting during the customer purchase process. Special lenses transmit light laterally, reducing glare in the past, so that people's attention is focused on the shelf, and the customer's eyes focus on the displayed object to enhance the shopping experience.

Correct installation

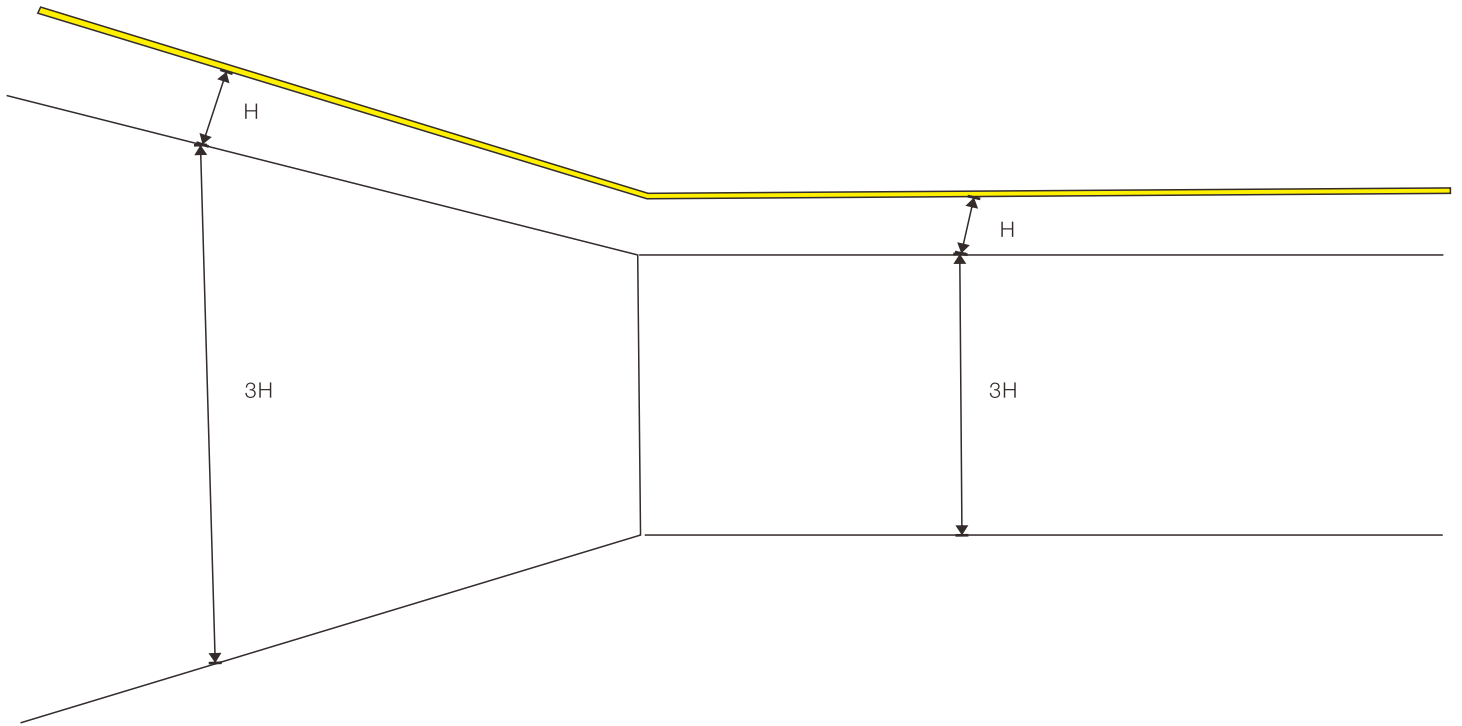


The table shows the correct installation distances for uniform lighting on the wall.



code	L (m)	h (m)
0127ASY	1.5	4.5

Product information




0127ASY / 0127 DASY

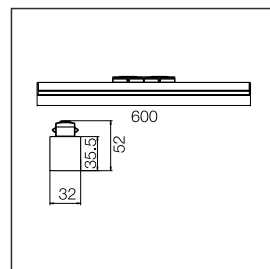

Power	20W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1600lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H



0126ME.cover application

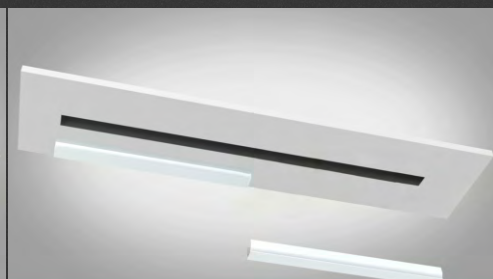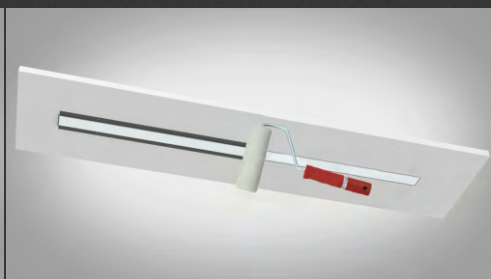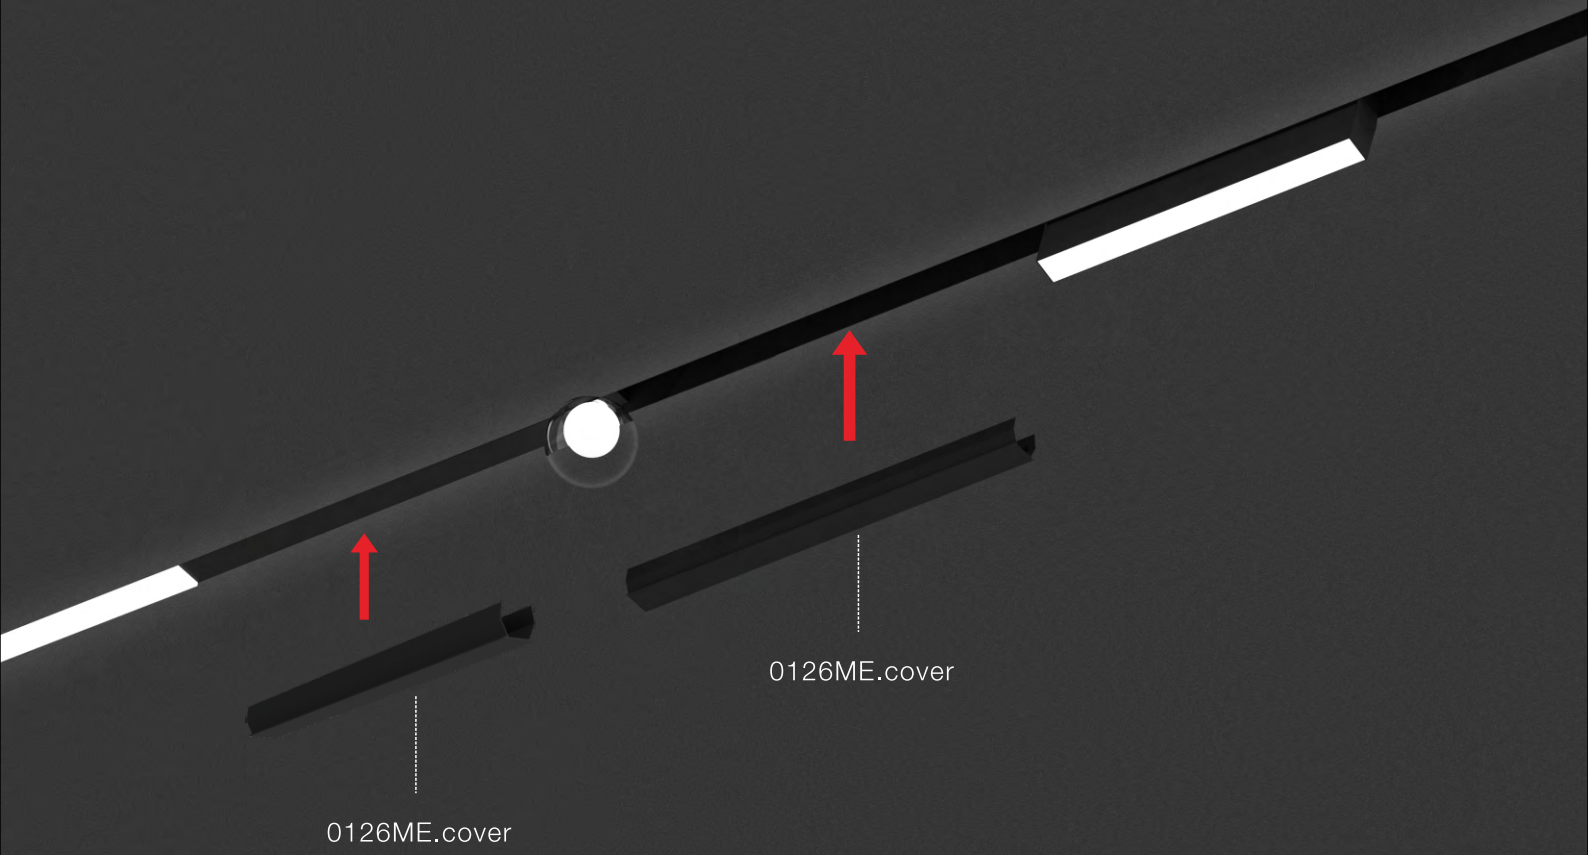



i-LUMINOSITY
LED LIGHTING FIXTURES

