



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

5 Borough Canopy

Description:

Our 5 Borough Canopy is easy to assemble and disassemble with its unique structure. Round of square options with 5 different mounting options fit for any outdoor area. Capable of group A & group B motion sensors, daylight sensors, or regional controls.



Features:

- 150lm/w
- Portable and easy disassemble structure
- Supports motion sensor, daylight sensor, and regional control.
- 7 Year Warranty.
- 5 different mounting ways



1. Pendant Mount

2. Cable Mount




3. Surface Mount

4. Junction Box

5. Trunnion Mount

Plate Mount

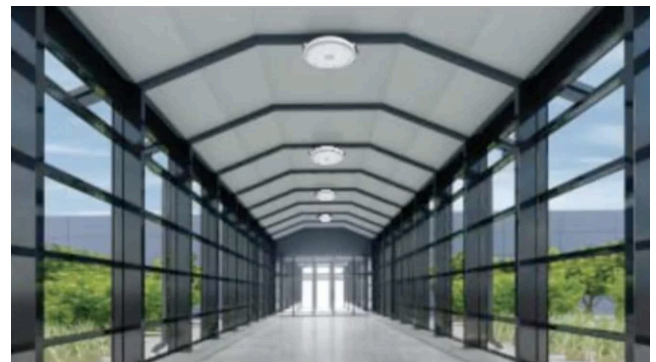

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	WATTS / SHAPE / LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILCPY5BLT	40w - SQ / 5,798	3 - 3000K	W - WHITE	SM - SURFACE MOUNT
	60w - SQ / 8,389	4 - 4000K		SMJ - SURFACE MOUNT WITH J BOX
	40w - CR / 5,798	5 - 5000K		PM - PENDANT MOUNT
	60w - CR / 8,389	57 - 5700K		C - CABLE MOUNT
	75w - CR / 10,573			TM - TRUNNION MOUNT

SAMPLE ITEM NUMBER: ILCPY5BLT 75 4 W SMJ

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **Operating Temperature:** -40°F ~ 122°F
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture is equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

