



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

ELLIS ADJUSTABLE DOWNLIGHT:


Description:

Our Ellis Adjustable Downlights are a new design with the widest variety of reflectors and trims. The array of wattages, sizes, and trim colors, and beam angle options make it ideal for all applications. An innovative energy saving solution for residential, offices, lobbies, and high end applications.




Features:

- Secondary Reflector:



Trimless Round

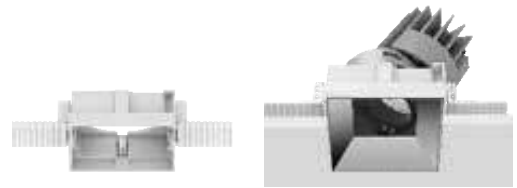

Trimless Square

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, or 4000K
- Operating temperature: -5F - 104F
- Finish option: Black, White, Silver
- 7 Year Warranty.


Dimensions:

Cutout Diameter(IN)	1.7IN	2.6IN	3.9IN	4.9IN	5.9IN	1.7IN	2.6IN	3.7IN	4.8IN	5.7IN
Trim Diameter(IN)	2IN	3IN	4IN	5IN	6IN	2IN	3IN	4IN	5IN	6IN
Height (IN)	2.3IN	3.8IN	5.8IN	6IN	7.3IN	2.3IN	3.8IN	5.8IN	6IN	7.3IN



Date:	_____
Project:	_____
Price:	_____

Explosion Diagram:

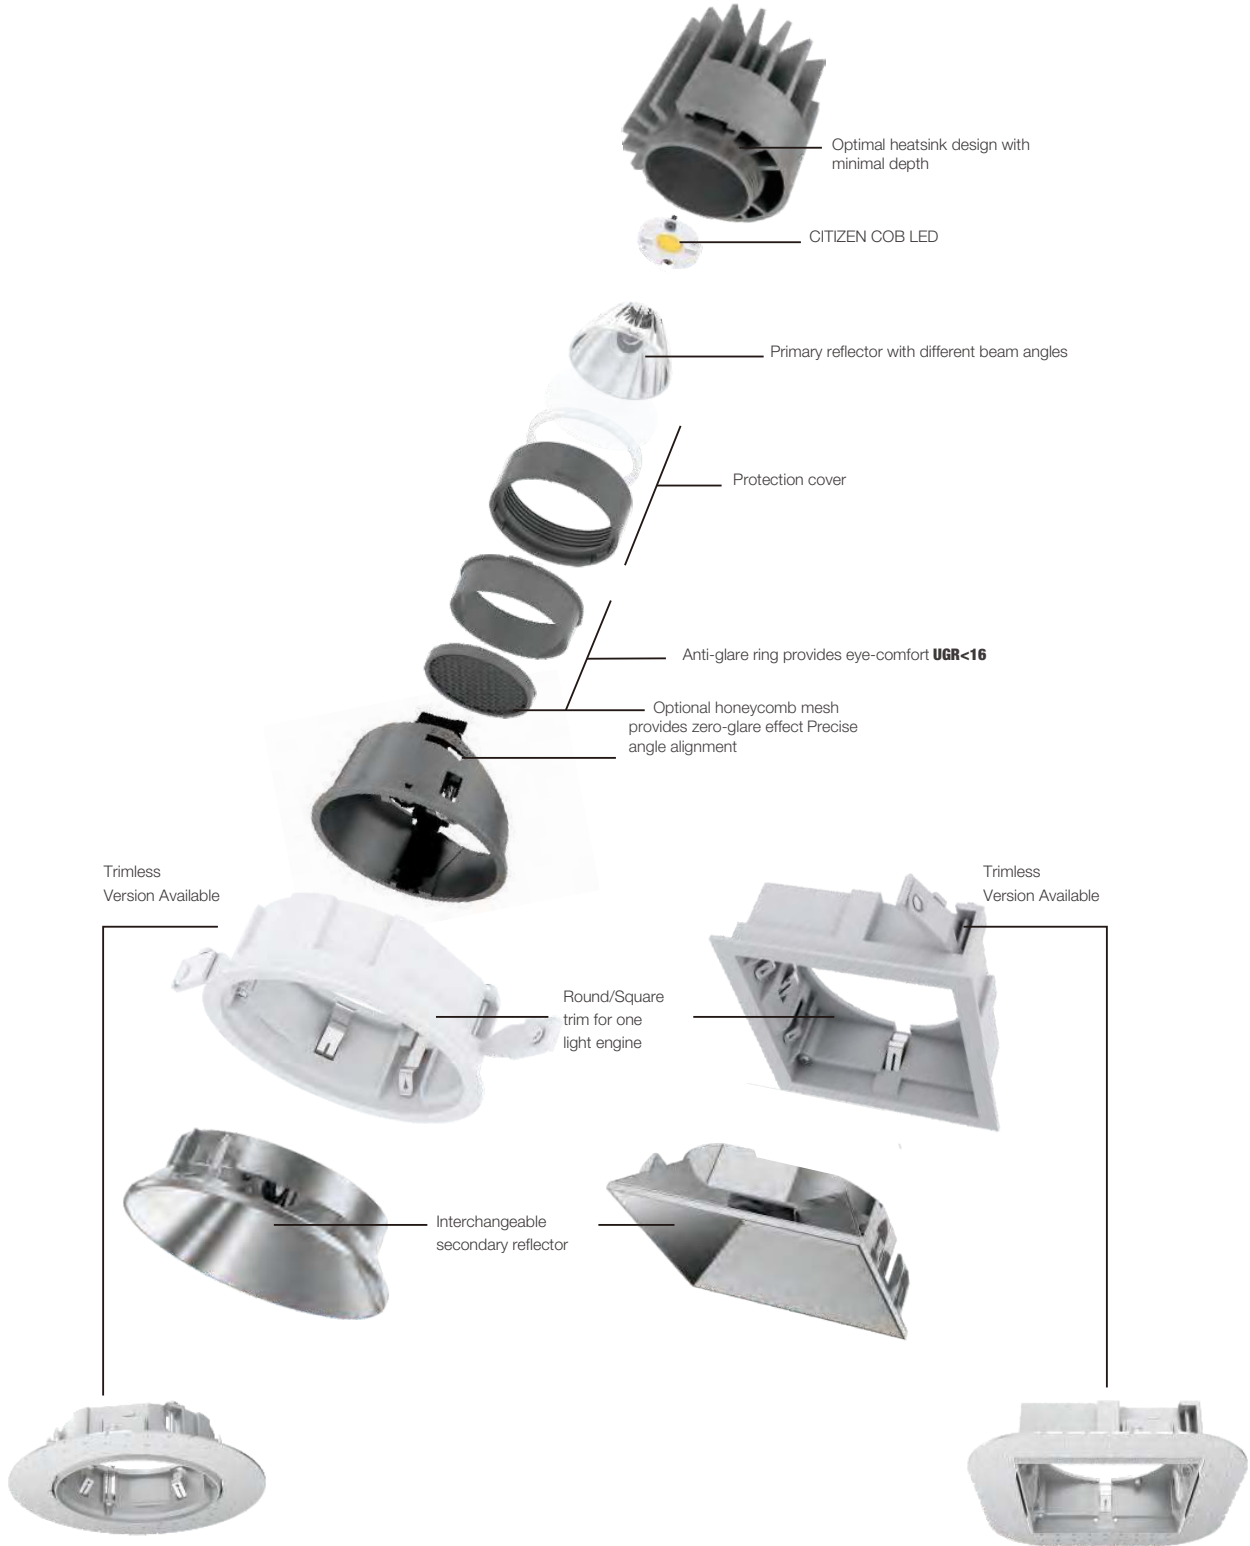

Date: _____
 Project: _____
 Price: _____

CIRCULAR 2 INCH:

Features:

• Beam Angle:




18° Beam 24° Beam 35° Beam 50° Beam

• Secondary Reflector:




Matte White Black

- Not Dimmable
- CRI>90
- Available in 2700K, 3000K or 4000K

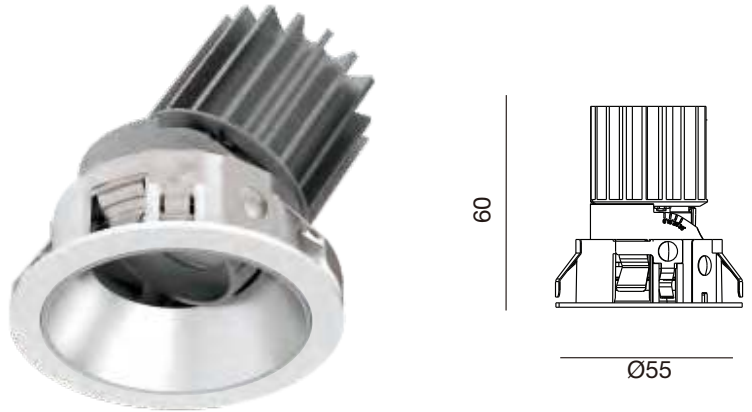


• Cutout

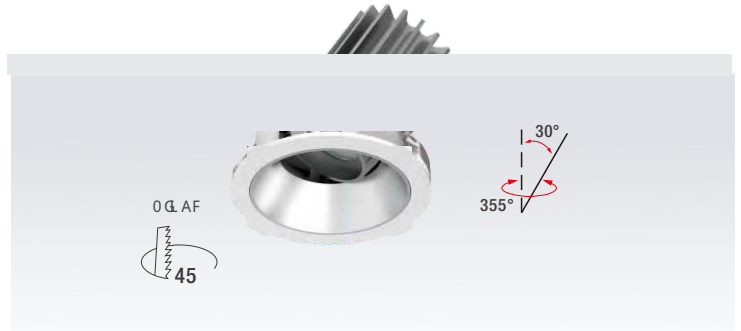

Photometrics:

4W

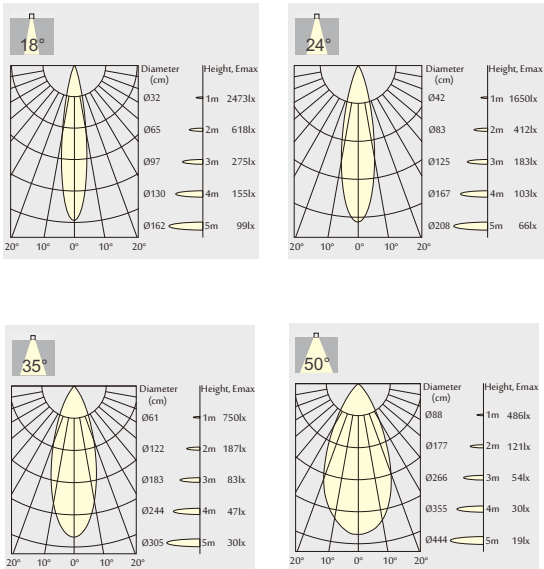

Date: _____
 Project: _____
 Price: _____

CIRCULAR 3 INCH:

Features:


• Beam Angle:



• Secondary Reflector:



- Phase Dim, 1-10V, or DALI
- CRI > 90
- Available in 2700K, 3000K or 4000K

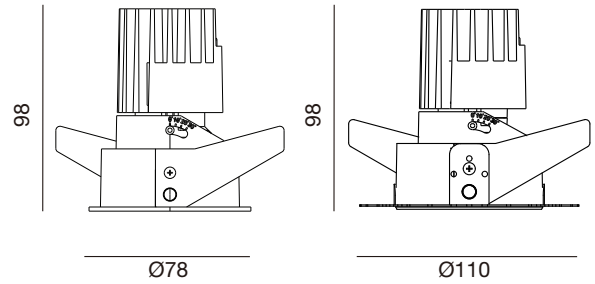


• Cutout




Photometrics:


7.5W

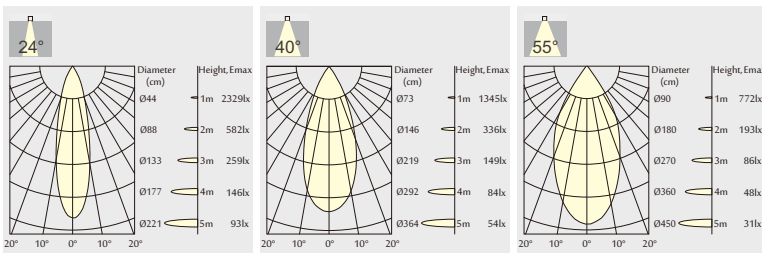

9W

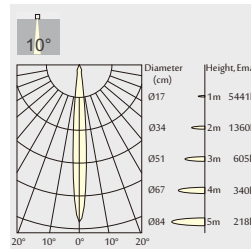

11W

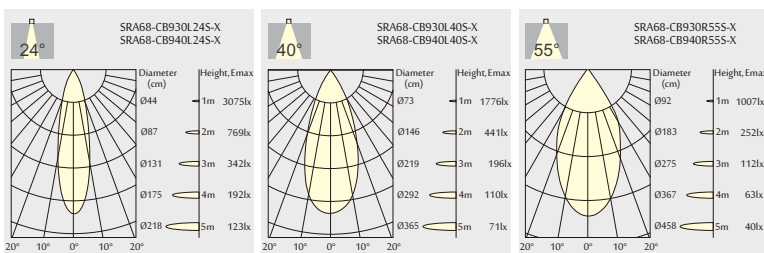



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

CIRCULAR 4 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte



Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K




• Cutout

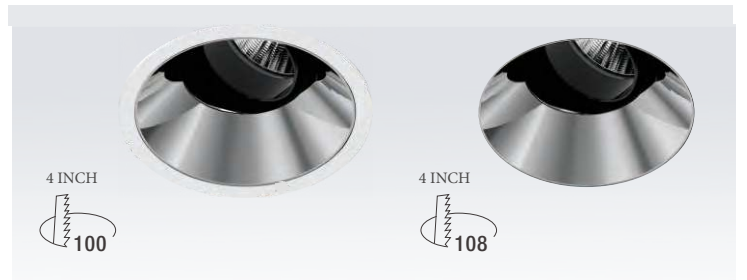


Photometrics:

13W

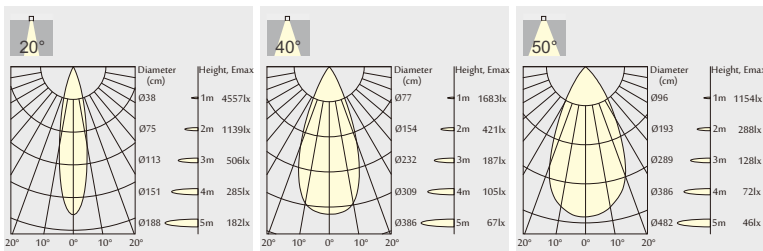

18W

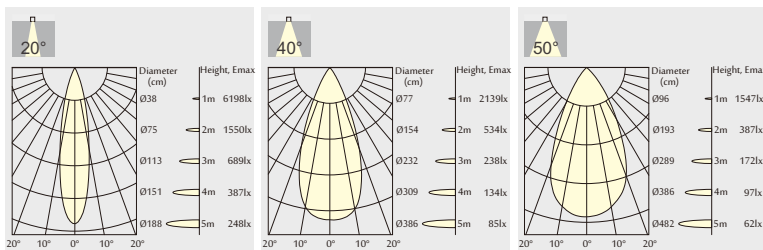



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

CIRCULAR 5 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte



Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K

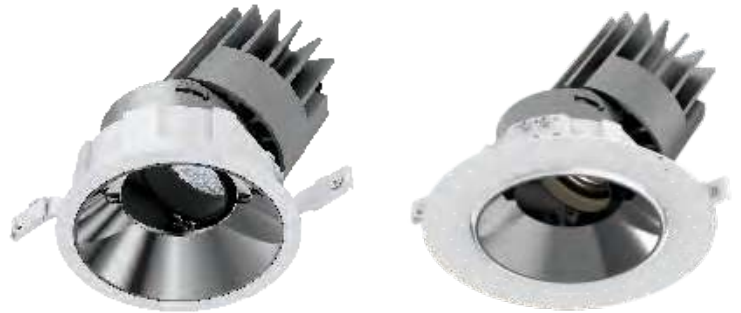

Ø137

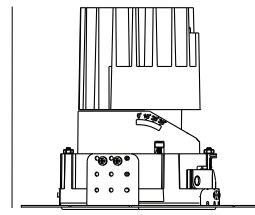

Ø173

• Cutout



5 INCH



125


5 INCH




132

Photometrics:

18W

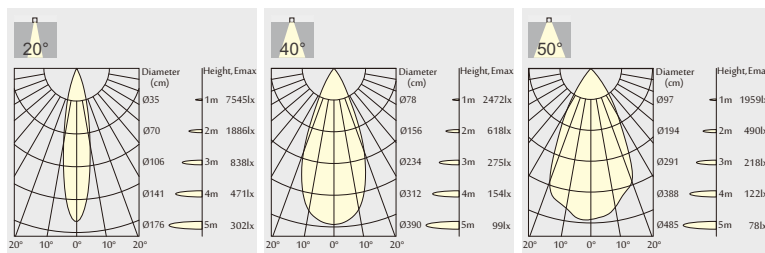

25W

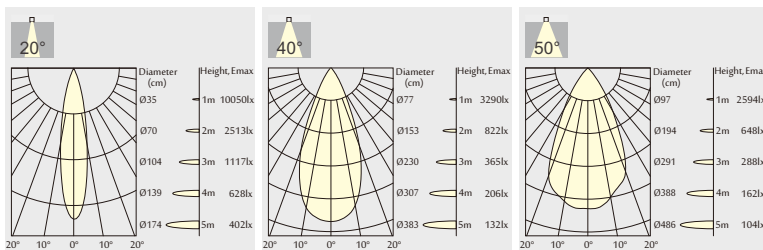



i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

CIRCULAR 6 INCH:

Features:

• Beam Angle:



20° Beam

35° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte


Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K

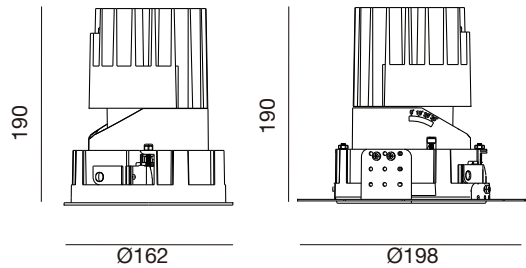


• Cutout

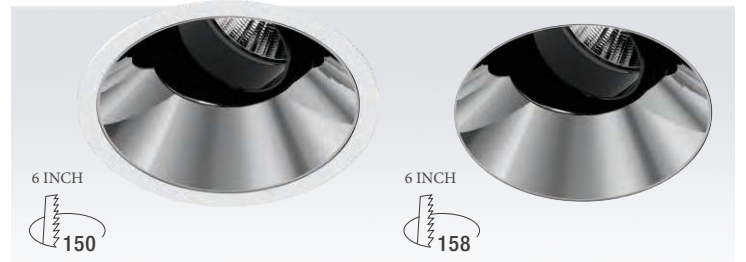


Photometrics:

25W

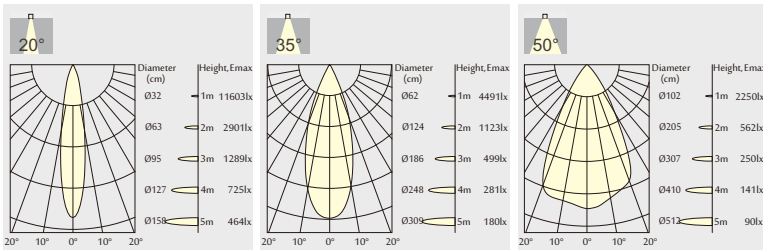

38W

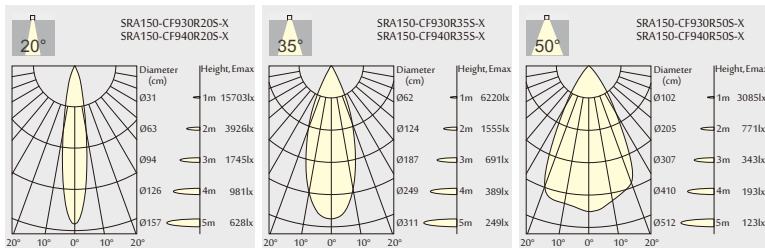


Date:	_____
Project:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	S. REFLECTOR	ADDITIONAL OPTIONS
ILDRLEDGF	4W - 2INRD / 380	27K - 2700K	S - SILVER	S - SILVER	DM - 1-10V DIMMING
	7.5W - 3INRD / 600	3K - 3000K	B - BLACK	CB- CHROME BLACK	DD - DALI DIMMING
	11W - 3INRD / 800	4K - 4000K	W - WHITE	M - MATTE	EL - ELV DIMMING
	13W - 4INRD / 850			W - WHITE	AG - ANTI GLARE ACCESSORY
	18W - 4INRD / 1,100			B - BLACK	EM - EMERGENCY BACKUP
	18W - 5INRD / 1,300			G - GOLD	
	25W - 5INRD / 1,700				
	25W - 6INRD / 1,800				
	38W - 6INRD / 2,500				

SAMPLE ITEM NUMBER: ILDRLEDGF 4W2INSQ 27K B M DM

Adjustable:

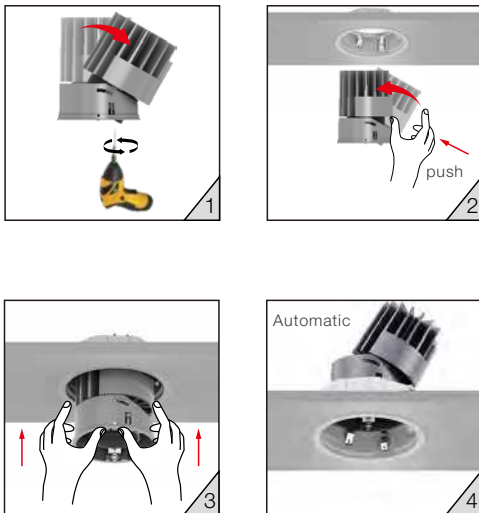

Date: _____
 Project: _____
 Price: _____

SQUARE 2 INCH:

Features:

• Beam Angle:




18° Beam 24° Beam 35° Beam 50° Beam

• Secondary Reflector:




Matte Black White

- Not Dimmable
- CRI > 90
- Available in 2700K, 3000K or 4000K


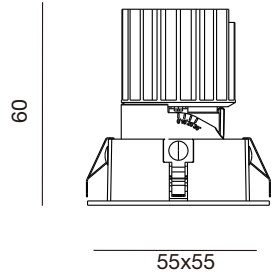


• Cutout

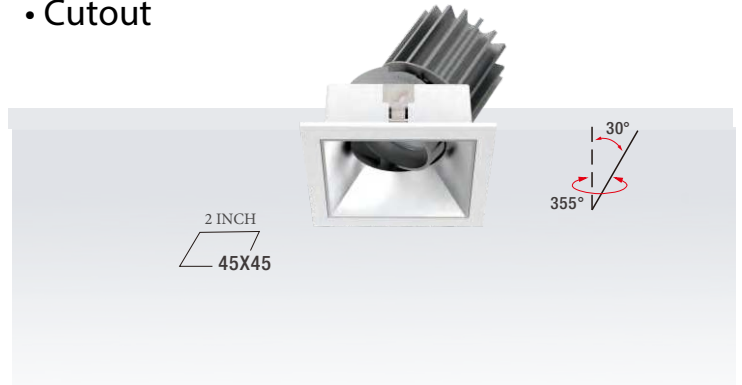

Photometrics:

4W

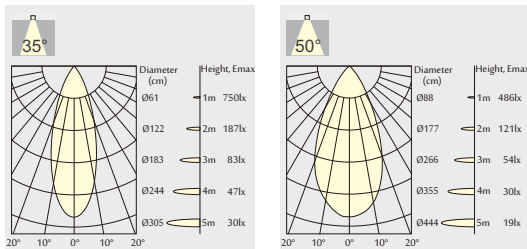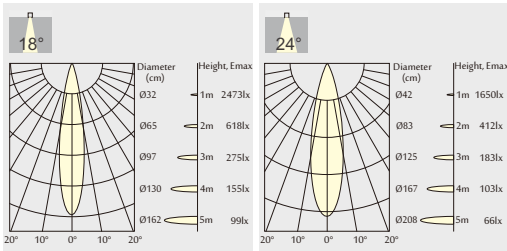



i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

SQUARE 3 INCH:

Features:

• Beam Angle:



10° Beam 24° Beam 40° Beam 55° Beam

• Secondary Reflector:





Chrome Black Specular White




Matte Black Gold

- Phase Dim, 1-10V, or DALI
- CRI > 90
- Available in 2700K, 3000K or 4000K

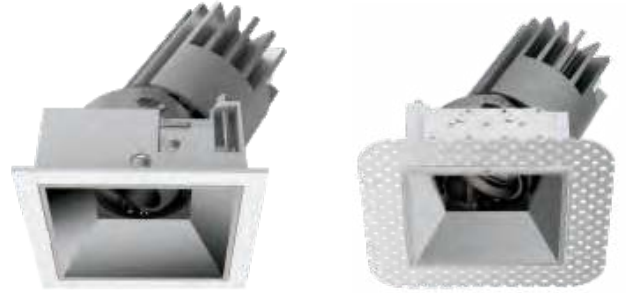

78x78

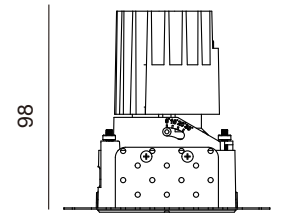


100x100

• Cutout




Photometrics:

7.5W

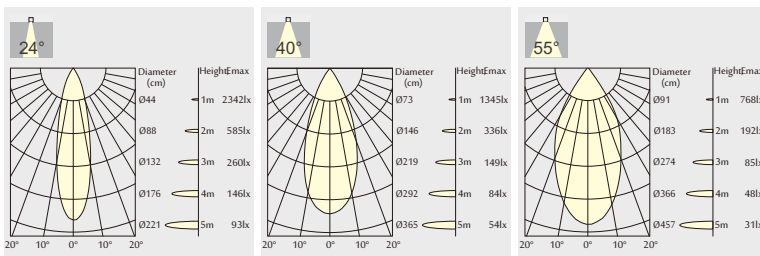

11W

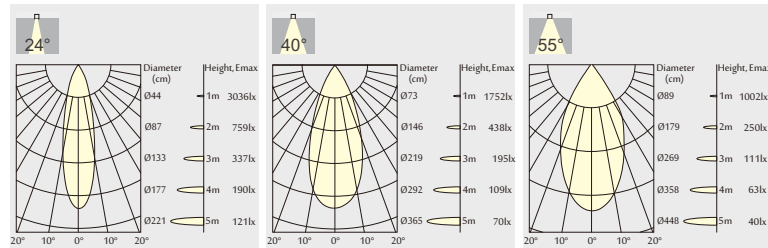

Date: _____
 Project: _____
 Price: _____

SQUARE 4 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular


White




Matte

Black

Gold



107x107

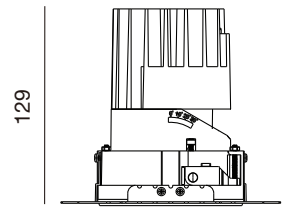

140x140


- Phase Dim, 1-10V, or DALI
- CRI>90
- Available in 2700K, 3000K or 4000K

• Cutout




Photometrics:

13W

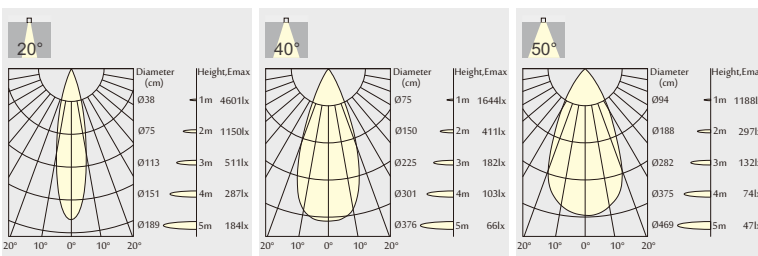

18W

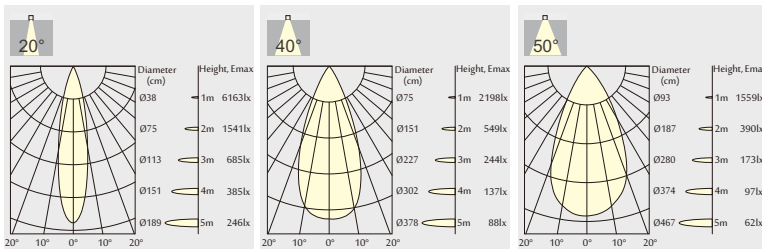

Date: _____
 Project: _____
 Price: _____

SQUARE 5 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular


White




Matte

Black

Gold




134x134

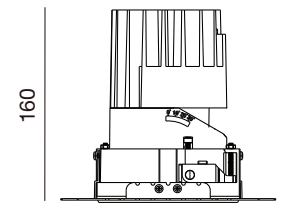

167x167


- Phase Dim, 1-10V, or DALI
- CRI>90
- Available in 2700K, 3000K or 4000K

• Cutout

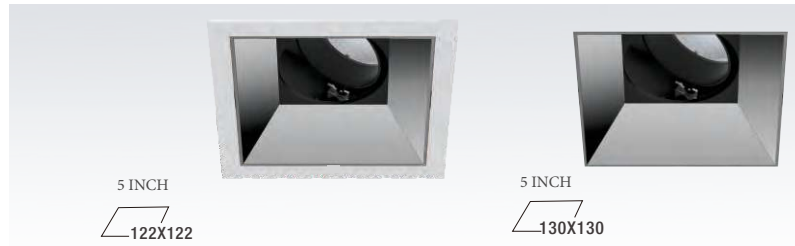


Photometrics:

18W

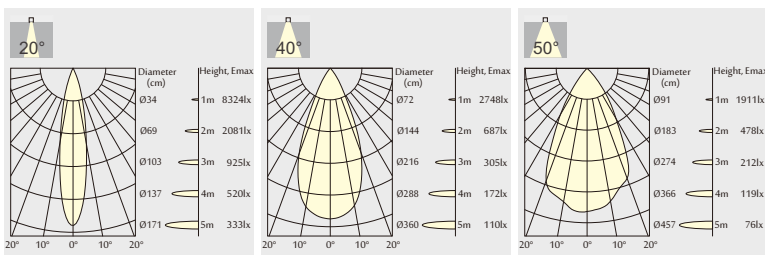

25W

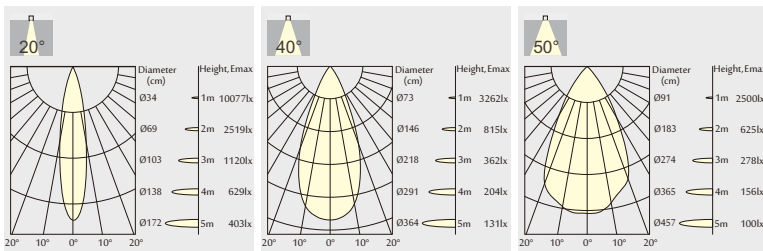

Date: _____
 Project: _____
 Price: _____

SQUARE 6 INCH:

Features:

• Beam Angle:



20° Beam

35° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte



Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K

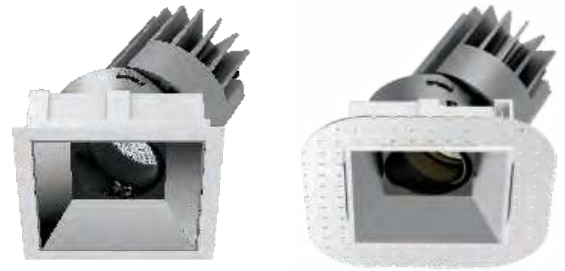

159x159




192x192

• Cutout




Photometrics:

25W

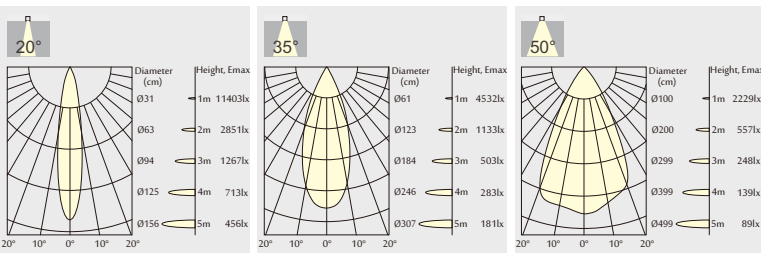

38W

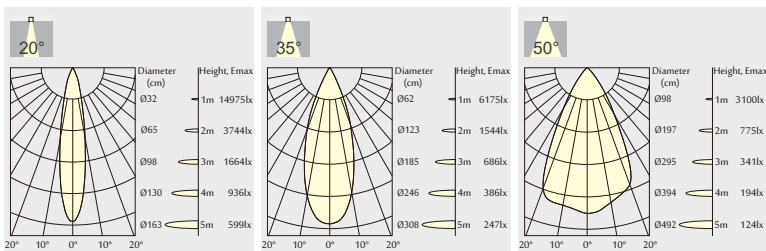

Date: _____
 Project: _____
 Price: _____

Ordering Key:

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	S. REFLECTOR	ADDITIONAL OPTIONS
ILDRLEDGF	4W - 2INSQ / 380	27K - 2700K	S - SILVER	S - SILVER	DM - 1-10V DIMMING
	7.5W - 3INSQ / 600	3K - 3000K	B - BLACK	CB- CHROME BLACK	DD - DALI DIMMING
	11W - 3INSQ / 800	4K - 4000K	W - WHITE	M - MATTE	EL - ELV DIMMING
	13W - 4INSQ / 850			W - WHITE	AG - ANTI GLARE ACCESSORY
	18W - 4INSQ / 1,100			B - BLACK	EM - EMERGENCY BACKUP
	18W - 5INSQ / 1,300			G - GOLD	
	25W - 5INSQ / 1,700				
	25W - 6INSQ / 1,800				
38W - 6INSQ / 2,500					

SAMPLE ITEM NUMBER: ILDRLEDGF 4W2INSQ 27K B M DM

