



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____


ELLIS ADJUSTABLE DOWNLIGHT:

Description:

Our Ellis Adjustable Downlights are a new design with the widest variety of reflectors and trims. The array of wattages, sizes, and trim colors, and beam angle options make it ideal for all applications. An innovative energy saving solution for residential, offices, lobbies, and high end applications.



Trimless Round

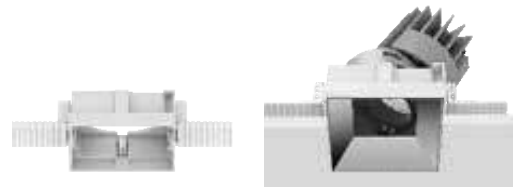

Trimless Square

Features:

- Secondary Reflector:



SILVER



Chrome Black



Matt



White























Black



Gold

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, or 4000K
- Operating temperature: -5F - 104F
- Finish option: Black, White, Silver
- 7 Year Warranty.

Dimensions:

Cutout Diameter(IN)	1.7IN	2.6IN	3.9IN	4.9IN	5.9IN	1.7IN	2.6IN	3.7IN	4.8IN	5.7IN
Trim Diameter(IN)										
Height (IN)										
	2.3IN	3.8IN	5.8IN	6IN	7.3IN	2.3IN	3.8IN	5.8IN	6IN	7.3IN






i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

Explosion Diagram:

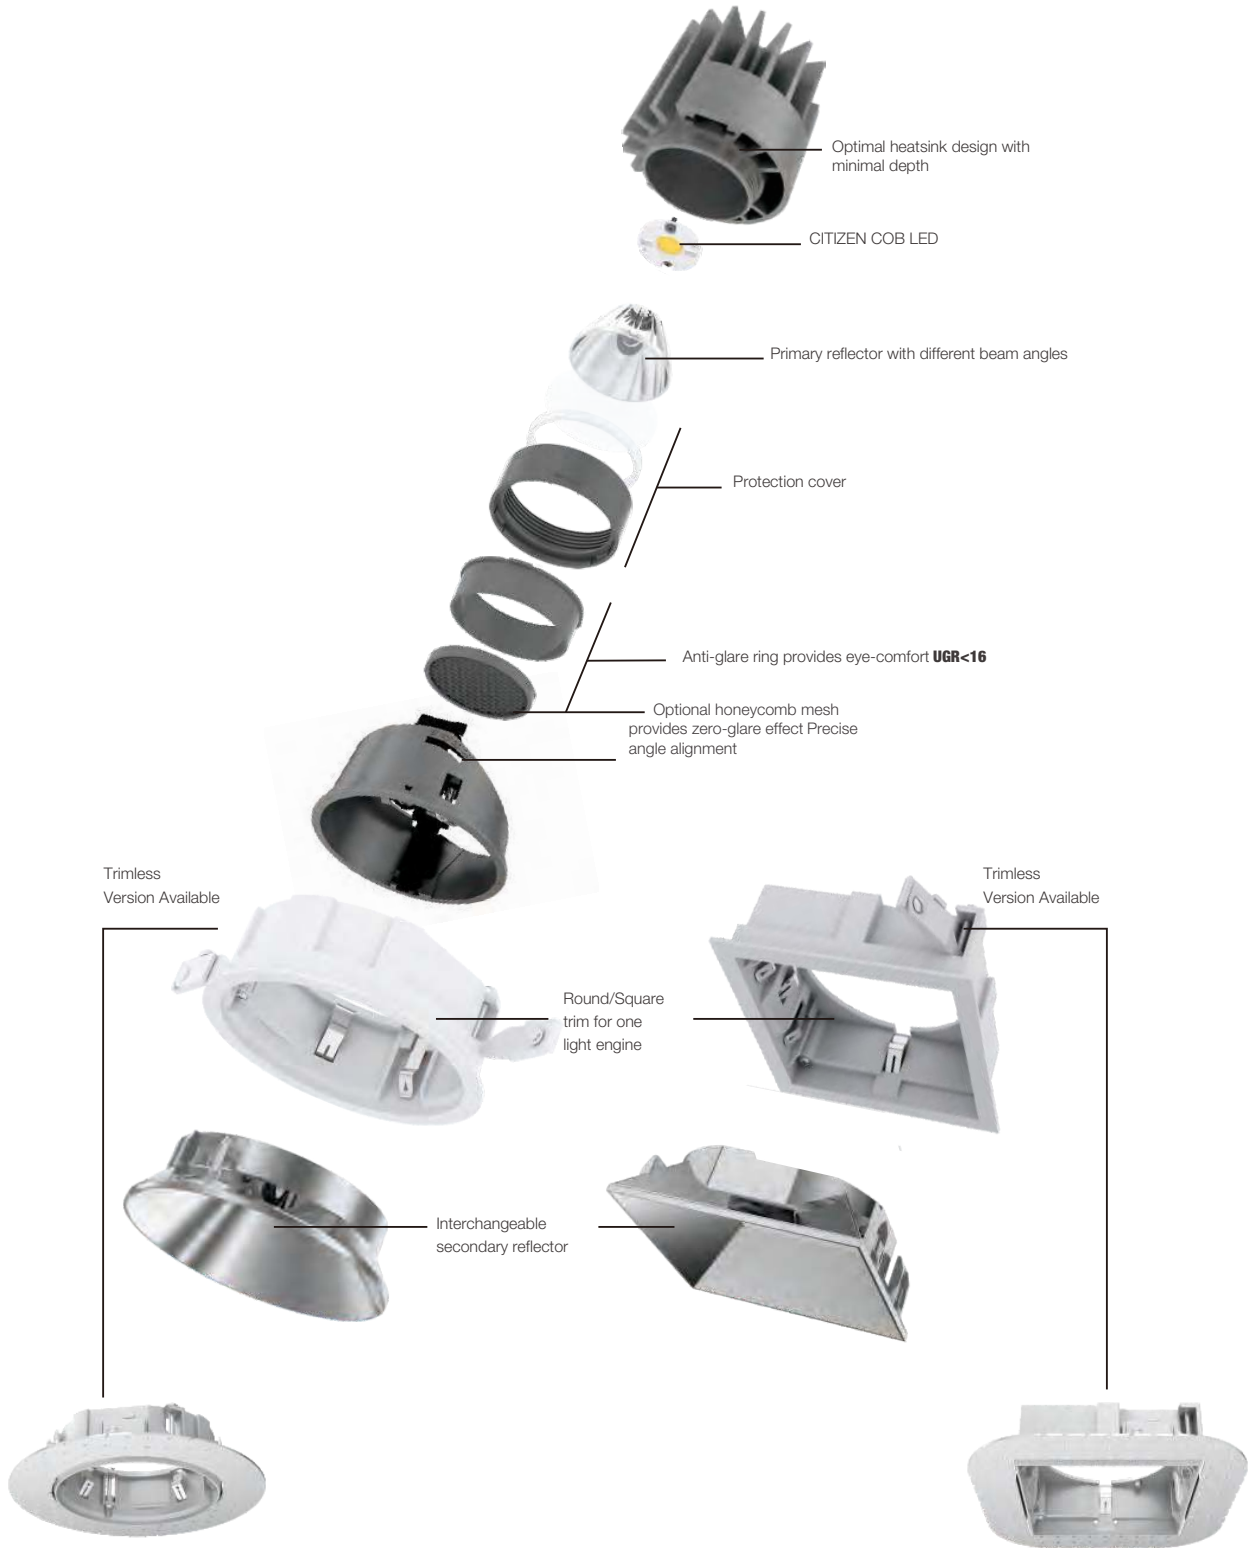

Date: _____
 Project: _____
 Price: _____

CIRCULAR 2 INCH:

Features:

• Beam Angle:




18° Beam 24° Beam 35° Beam 50° Beam

• Secondary Reflector:



Matte White Black

- Not Dimmable
- CRI > 90
- Available in 2700K, 3000K or 4000K




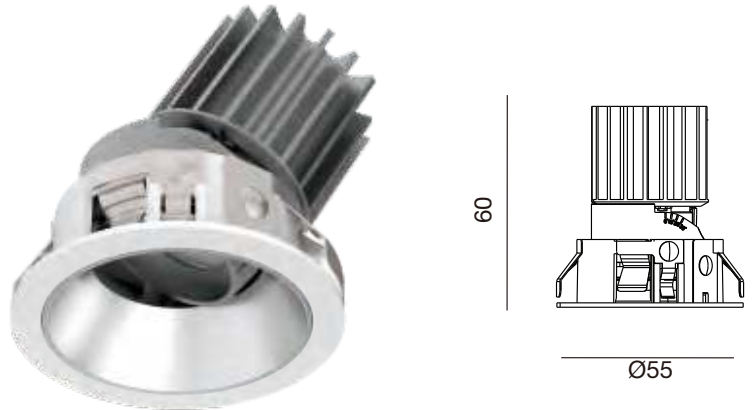


• Cutout



Photometrics:

4W



Date: _____
 Project: _____
 Price: _____

CIRCULAR 3 INCH:

Features:

• Beam Angle:



10° Beam 24° Beam 40° Beam 55° Beam

• Secondary Reflector:




Chrome Black Specular White



Matte Black Gold

- Phase Dim, 1-10V, or DALI
- CRI > 90
- Available in 2700K, 3000K or 4000K

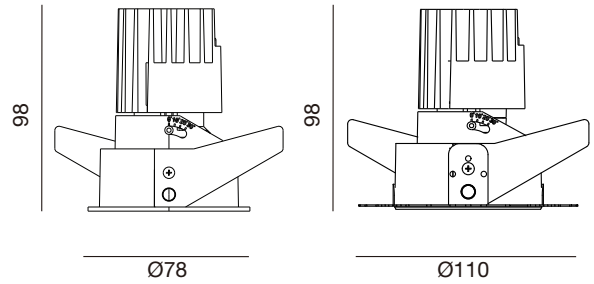


• Cutout




Photometrics:


7.5W

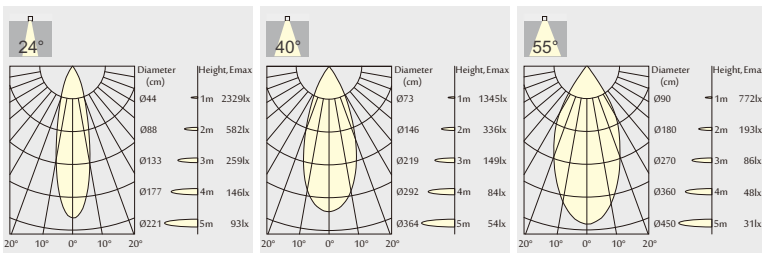

8.5W



11W

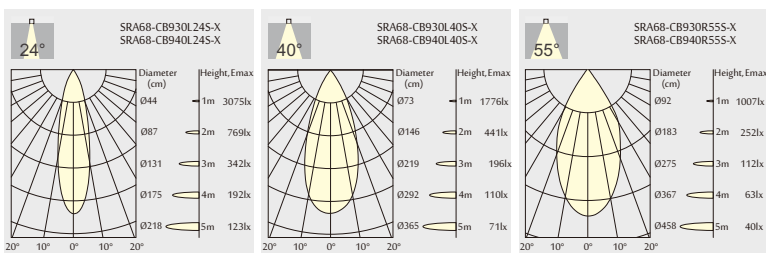



i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

CIRCULAR 4 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte



Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K




• Cutout

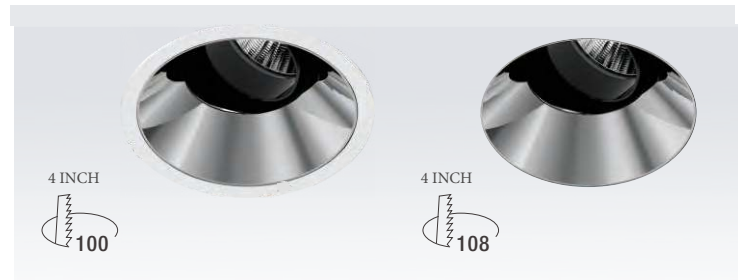


Photometrics:

13W

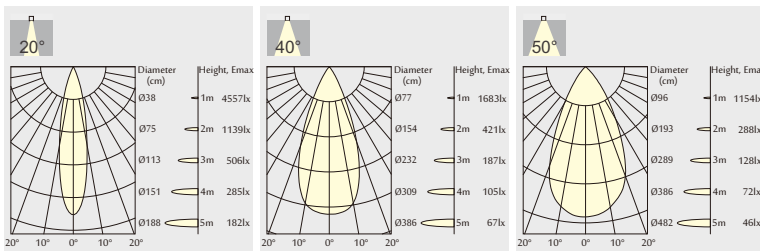

18W

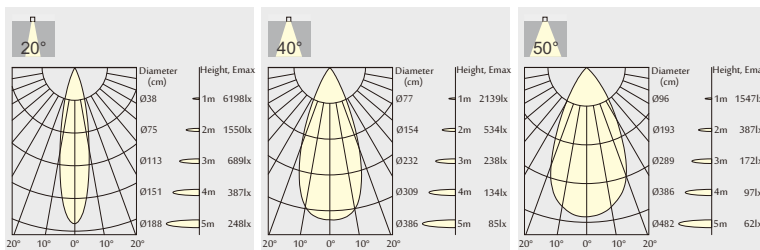



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

CIRCULAR 5 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte


Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K



Ø137




Ø173

• Cutout




Photometrics:

18W

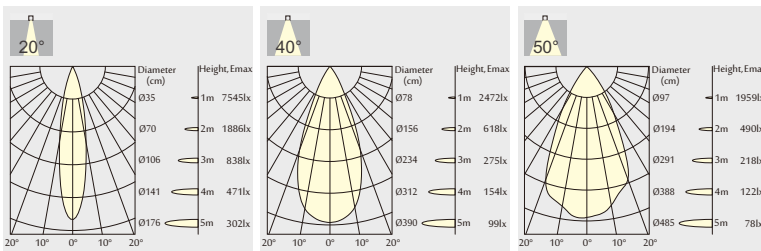

25W

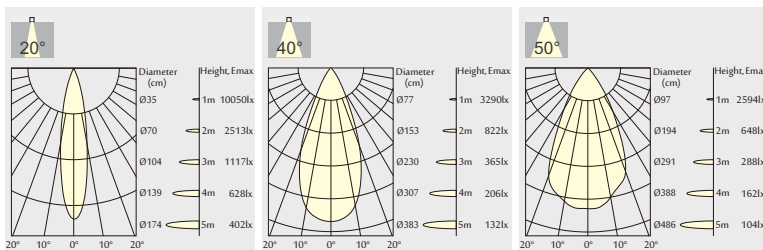



i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

CIRCULAR 6 INCH:

Features:

• Beam Angle:



20° Beam

35° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte


Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K

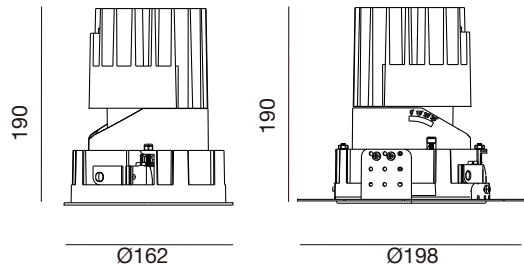


• Cutout

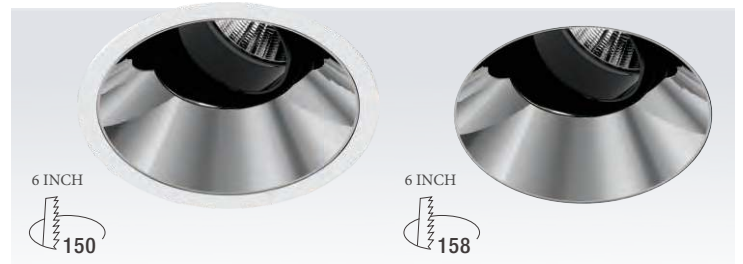


Photometrics:

25W

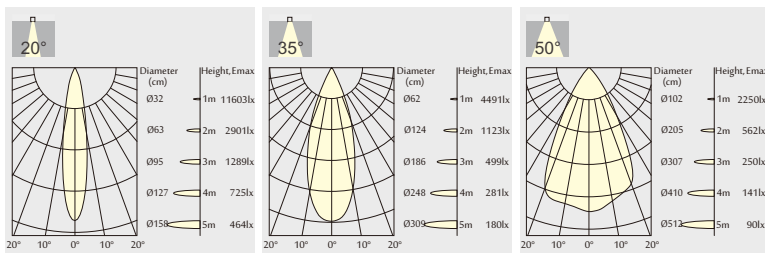

38W

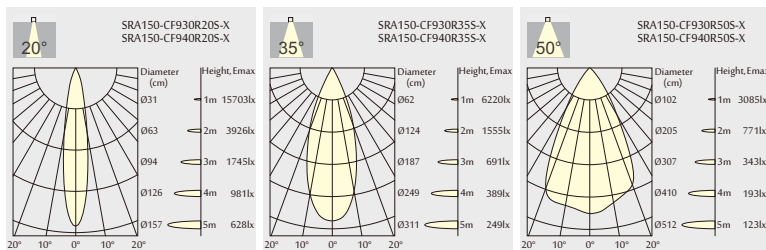

Date: _____
 Project: _____
 Price: _____

SQUARE 2 INCH:

Features:

• Beam Angle:




18° Beam 24° Beam 35° Beam 50° Beam

• Secondary Reflector:




Matte Black White

- Not Dimmable
- CRI > 90
- Available in 2700K, 3000K or 4000K





• Cutout

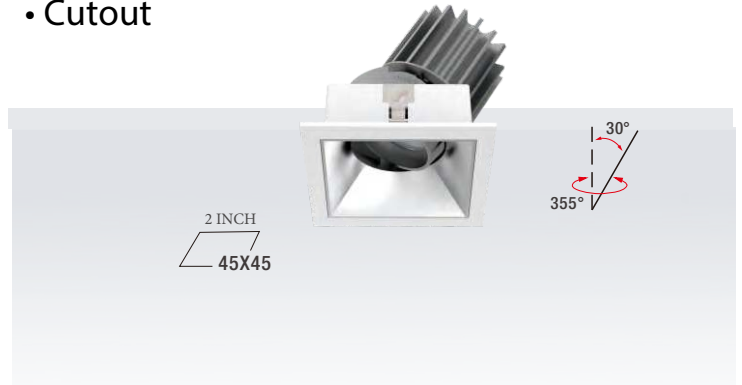

Photometrics:

4W

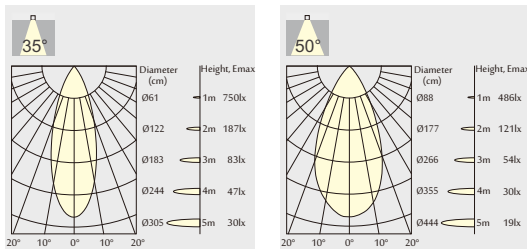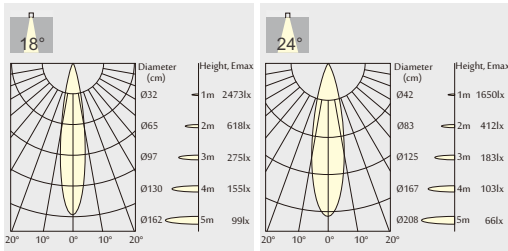



i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

SQUARE 3 INCH:

Features:

• Beam Angle:



10° Beam 24° Beam 40° Beam 55° Beam

• Secondary Reflector:



Chrome Black Specular White





Matte Black Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K

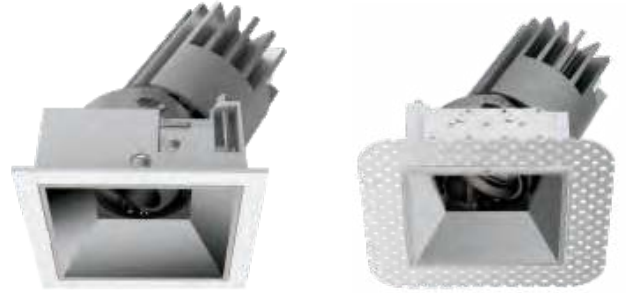

78x78




100x100

• Cutout




Photometrics:


7.5W

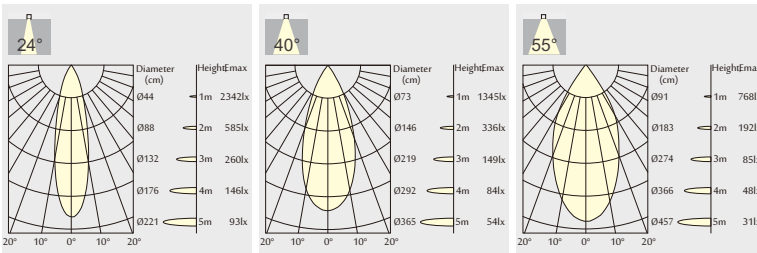

8.5W



11W

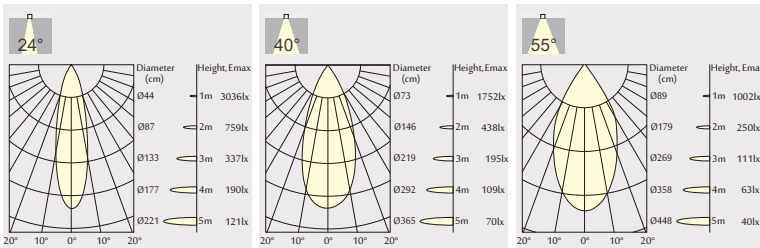

Date: _____
 Project: _____
 Price: _____

SQUARE 4 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular


White




Matte

Black

Gold




107x107



140x140


- Phase Dim, 1-10V, or DALI
- CRI>90
- Available in 2700K, 3000K or 4000K

• Cutout

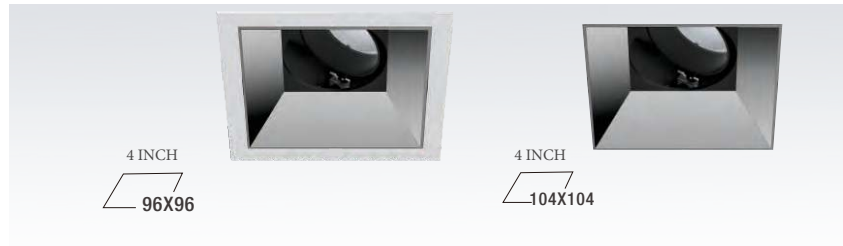


Photometrics:

13W

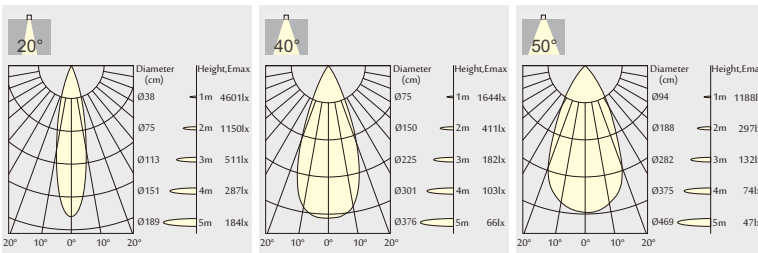

18W

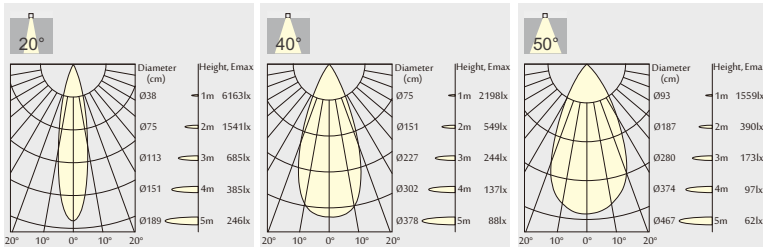

Date: _____
 Project: _____
 Price: _____

SQUARE 5 INCH:

Features:

• Beam Angle:



20° Beam

40° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular

White



Matte


Black

Gold


• Phase Dim, 1-10V, or DALI

• CRI > 90

• Available in 2700K, 3000K or 4000K



134x134




167x167

• Cutout




Photometrics:

18W

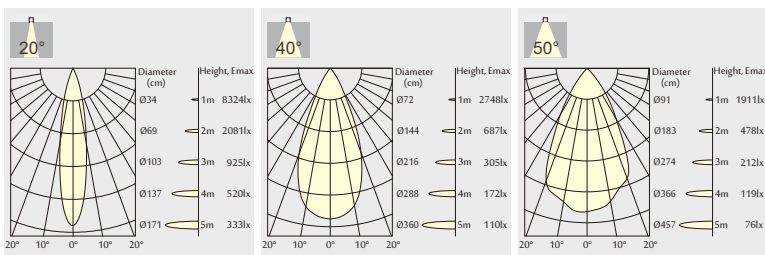

25W

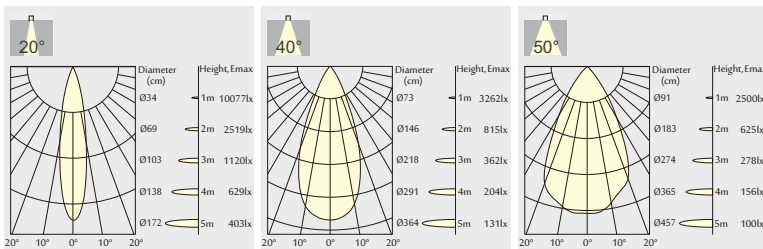

Date: _____
 Project: _____
 Price: _____

SQUARE 6 INCH:

Features:

• Beam Angle:



20° Beam

35° Beam

50° Beam

• Secondary Reflector:



Chrome Black

Specular




White



Matte

Black

Gold

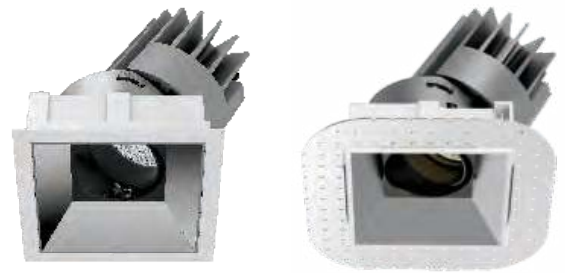


- Phase Dim, 1-10V, or DALI
- CRI>90
- Available in 2700K, 3000K or 4000K

• Cutout




Photometrics:

25W

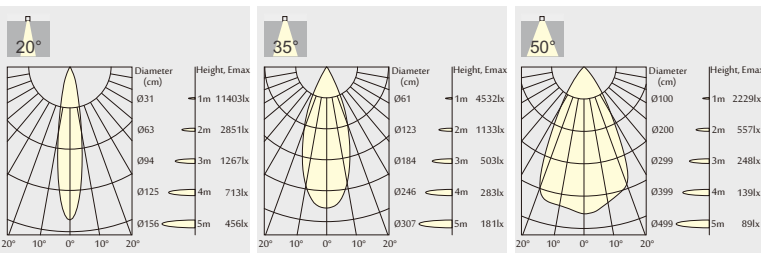

38W

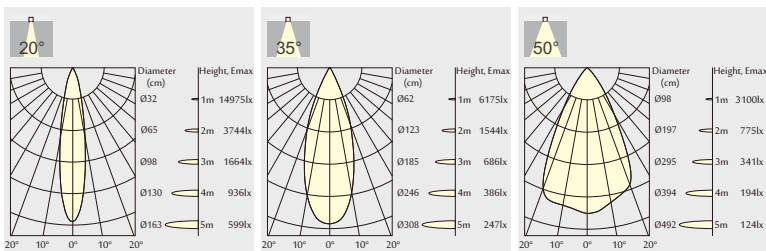

Date: _____
 Project: _____
 Price: _____

Ordering Key:

SERIES NUMBER	SIZE	SHAPE	WATTAGE	CCT	TRIM FINISH	REFLECTOR FINISH	ADDITIONAL OPTIONS
ILDLEAEL	2-2IN	RD-ROUND	4 - 4W	27K - 27K	S - SILVER	S - SILVER	DM - 1-10V DIMMING
	3 - 3IN	SQ-SQUARE	7.5W - 7.5W	3K - 3K	B - BLACK	CB- CHROME BLACK	DD - DALI DIMMING
	4 - 4IN		8.5W - 8.5W	4K - 4K	W - WHITE	M - MATTE	EL - ELV DIMMING
	5 - 5IN		11W - 11W		T - TRIMLESS	W - WHITE	AG - ANTI GLARE ACCESSORY
	6 - 6IN		13W - 13W			B - BLACK	EM - EMERGENCY BACKUP
			18W - 18W			G - GOLD	
			25W - 25W				
			38W - 38W				

SAMPLE ITEM NUMBER: ILDLEAEL 2 RD 4 27K B CB DM

Adjustable:

