


Date:	_____
Project:	_____
Price:	_____

# HOUSTON FIXED DOWNLIGHT:

## Description:

Our Houston Fixed Downlights are a new design with the widest variety of reflectors and trims. The array of wattages, sizes, and trim colors, making it ideal for all applications. A smart energy saving solution for offices and supermarkets applications.

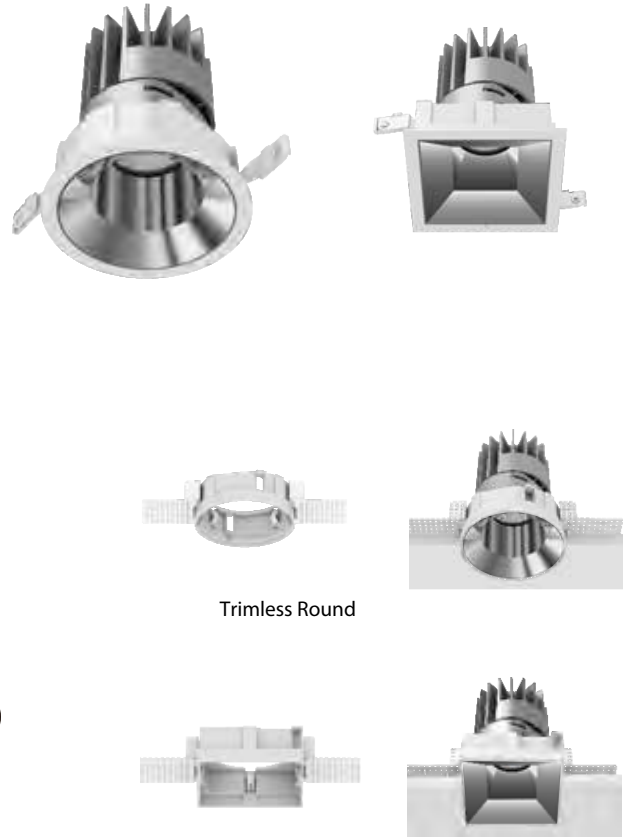


Trimless Round

Trimless Square

## Features:

### • Secondary Reflector:



- Beam Angle: 28, 35, 50.
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, 5000K.
- Operating temperature: -5F - 104F
- Finish option: Black, White, Silver
- 7 Year Warranty.


## Dimensions:

Cutout Diameter(IN)	3.9IN	4.9IN	5.9IN	3.7IN	4.8IN	5.8IN
Trim Diameter(IN)	4IN	5IN	6IN	4IN	5IN	6IN
Height (IN)	4.9IN	6.1IN	7.4IN	4.9IN	6.1IN	7.4IN



Date:	_____
Project:	_____
Price:	_____

## Explosion Diagram:

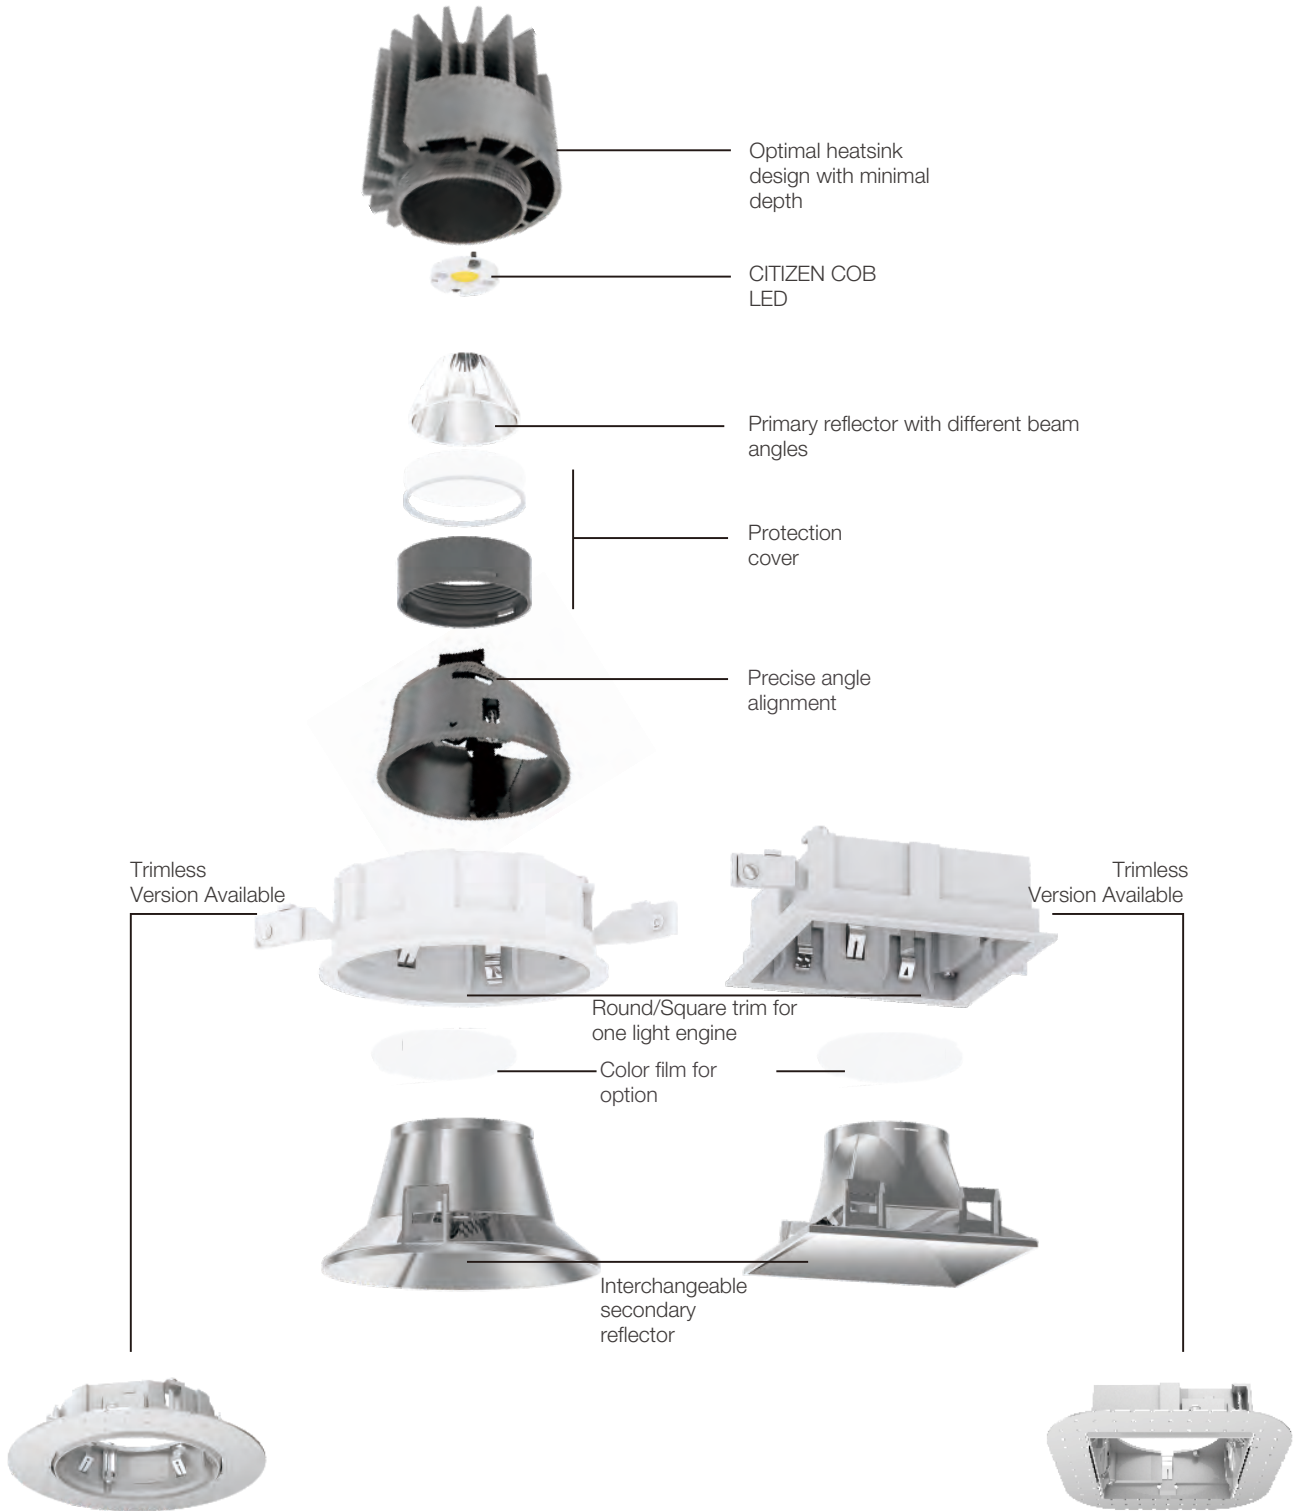



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date: \_\_\_\_\_  
Project: \_\_\_\_\_  
Price: \_\_\_\_\_

## CIRCULAR 4 INCH:

### Features:

#### • Beam Angle:



28° Beam      35° Beam      50° Beam

#### • Secondary Reflector:



Chrome Black    Specular    White





Matte    Black    Gold


#### • Phase Dim, 1-10V, or DALI

#### • CRI > 90

#### • Available in 2700K, 3000K or 4000K

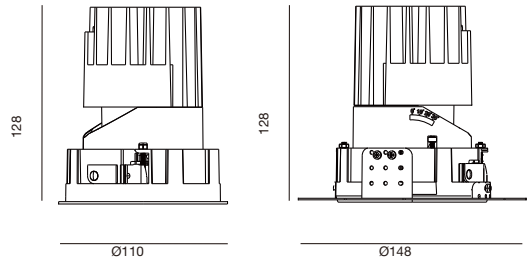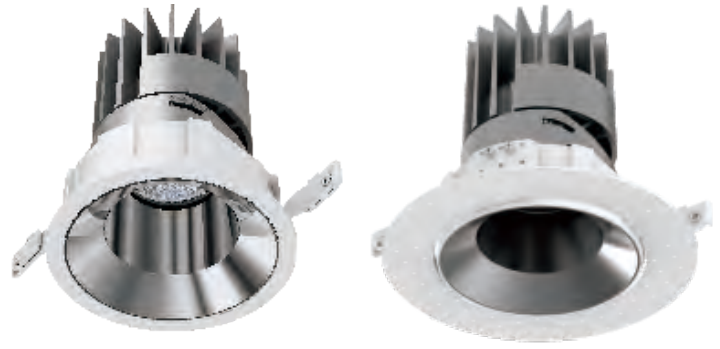


#### • Cutout

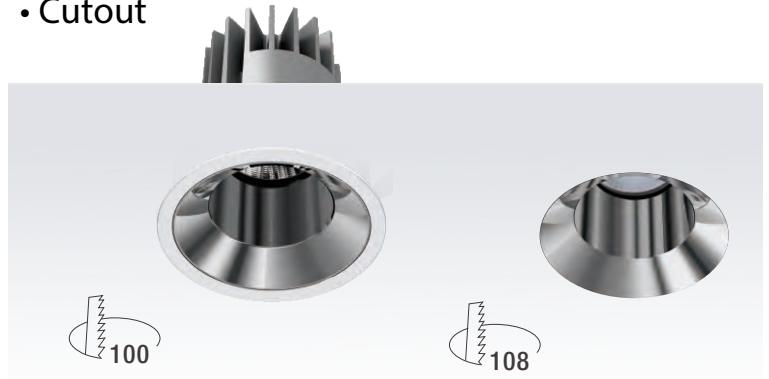


## Photometrics:

### 13W

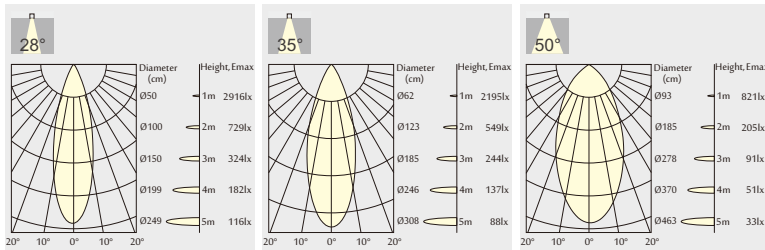

### 18W

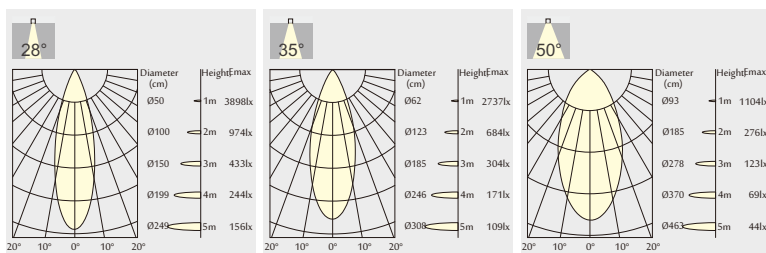



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date: \_\_\_\_\_  
Project: \_\_\_\_\_  
Price: \_\_\_\_\_

## CIRCULAR 5 INCH:

### Features:

#### • Beam Angle:



28° Beam



40° Beam



50° Beam

#### • Secondary Reflector:



Chrome Black



Specular



White



Matte



Black




Gold


#### • Phase Dim, 1-10V, or DALI

#### • CRI>90

#### • Available in 2700K, 3000K or 4000K

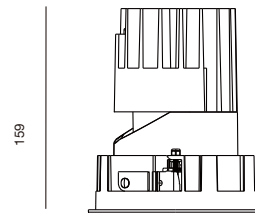

Ø137

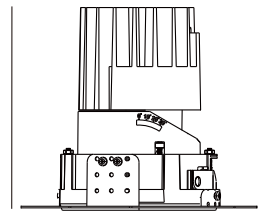


Ø173

#### • Cutout




## Photometrics:

### 18W

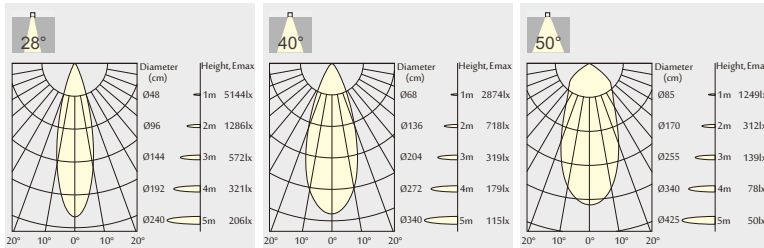

### 25W

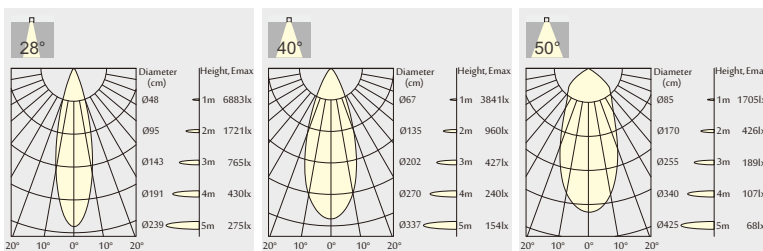

Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## CIRCULAR 6 INCH:

### Features:

#### • Beam Angle:



28° Beam



32° Beam



50° Beam

#### • Secondary Reflector:



Chrome Black



Specular



White



Matte



Black






Gold


#### • Phase Dim, 1-10V, or DALI

#### • CRI>90

#### • Available in 2700K, 3000K or 4000K

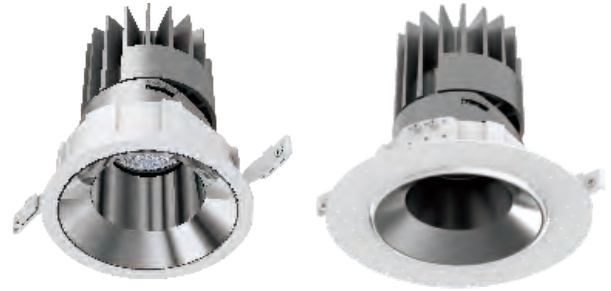


#### • Cutout

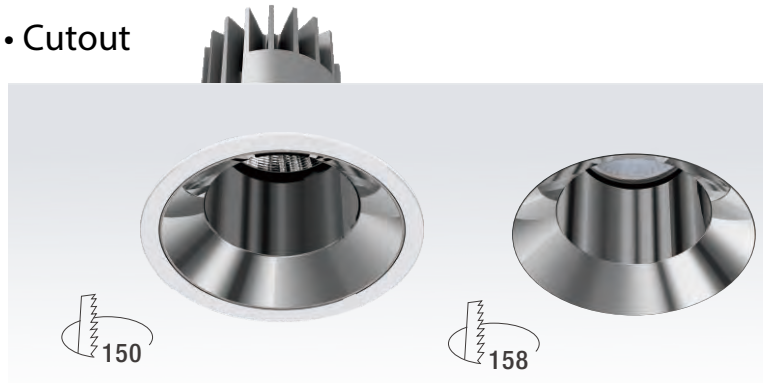


## Photometrics:

### 25W

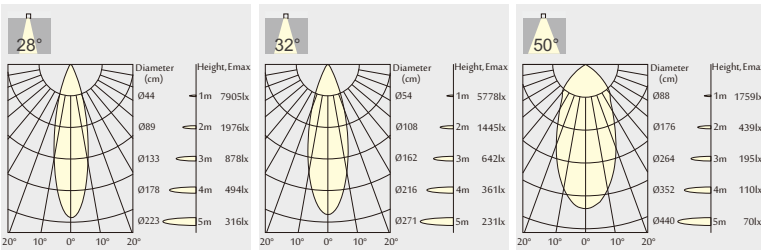

### 38W

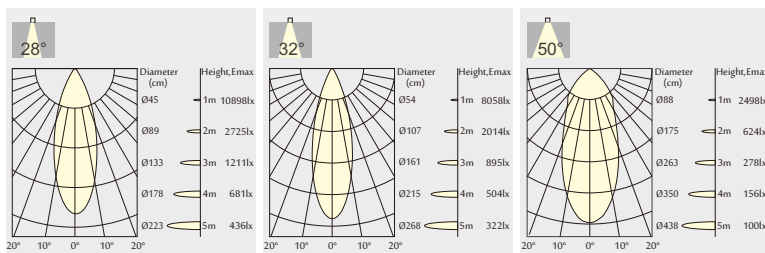

Date:	_____
Project:	_____
Project:	_____
Price:	_____

## Ordering Key:

ILDRLHDGF

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	S. REFLECT	ADDITIONAL OPTIONS
ILDRLHDGF	13WRD - 4INRD / 900	27K - 2700K	S - SILVER	S - SILVER	DM - 0-10V DIMMING
	18W4R - 4INRD / 1,200	3K - 3000K	B - BLACK	CB- CHROME BLACK	AG - ANTI GLARE ACCESSORY
	18W5R - 5INRD / 1,400	4K - 4000K	W - WHITE	M - MATTE	EM - EMERGENCY BACKUP
	25W5R - 5INRD / 1,800	5K - 5000K		W - WHITE	
	25W6R - 6INRD / 1,900			B - BLACK	
	38WRD - 6INRD / 2,700			G - GOLD	

SAMPLE ITEM NUMBER: ILDRLHDGF 13w 27K B M DM



Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## SQUARE 4 INCH:

### Features:

#### • Beam Angle:



28° Beam      35° Beam      50° Beam




#### • Secondary Reflector:



Chrome Black    Specular    White




Matte    Black    Gold

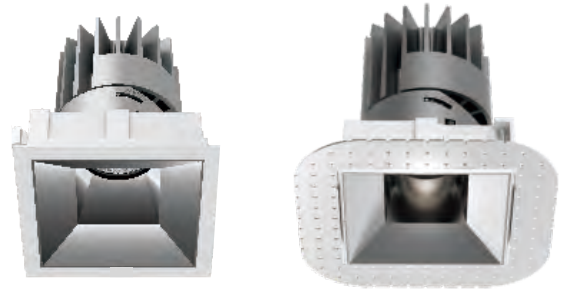


- Phase Dim, 1-10V, or DALI
- CRI>90
- Available in 2700K, 3000K or 4000K

#### • Cutout

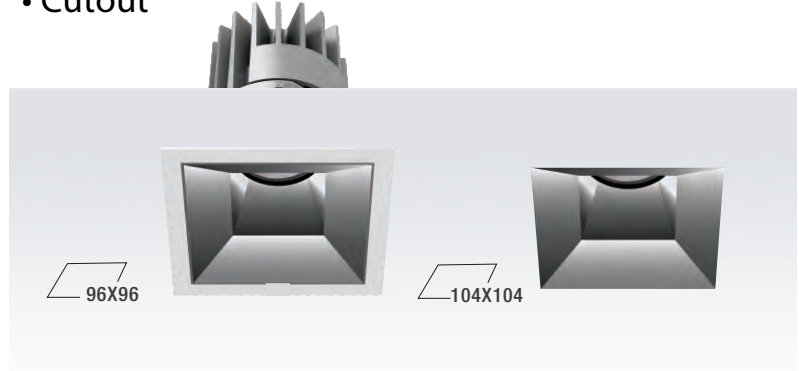


### Photometrics:

#### 13W

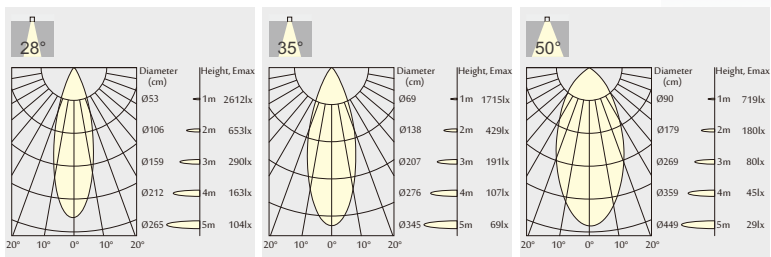

#### 18W

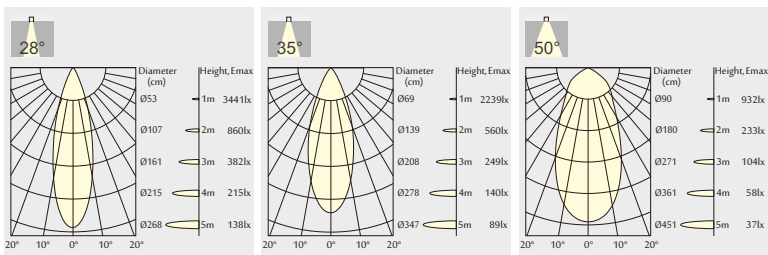

Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## SQUARE 5 INCH:

### Features:

#### • Beam Angle:



#### • Secondary Reflector:





Chrome Black    Specular    White




Matte    Black    Gold

- Phase Dim, 1-10V, or DALI
- CRI > 90
- Available in 2700K, 3000K or 4000K

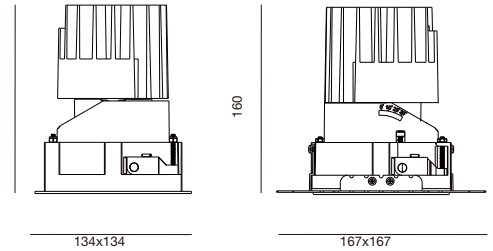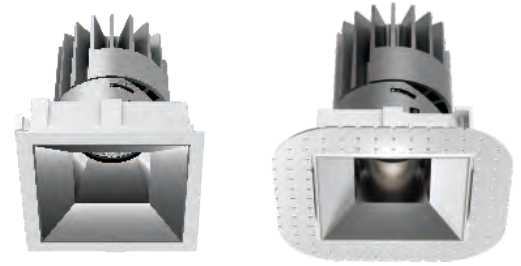


#### • Cutout

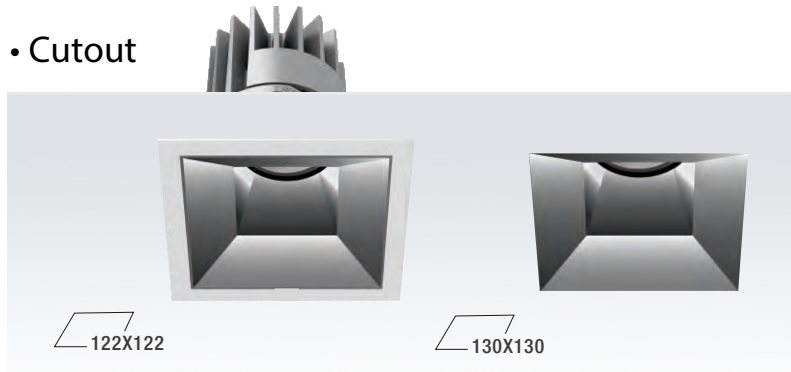


### Photometrics:

#### 18W

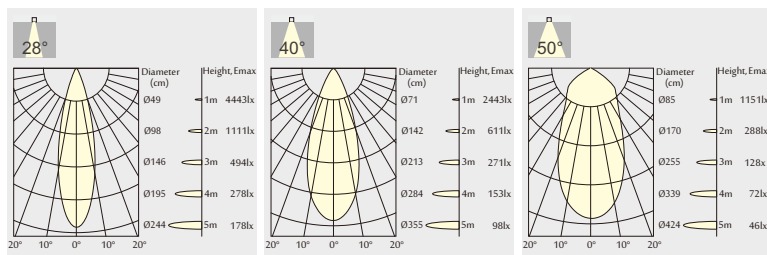

#### 25W

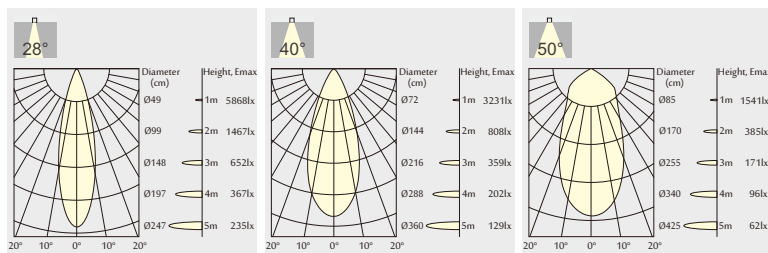



Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## SQUARE 6 INCH:

### Features:

#### • Beam Angle:



28° Beam      35° Beam      50° Beam

#### • Secondary Reflector:





Chrome Black    Specular    White




Matte    Black    Gold

- Phase Dim, 1-10V, or DALI
- CRI>90
- Available in 2700K, 3000K or 4000K

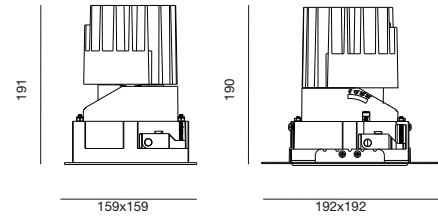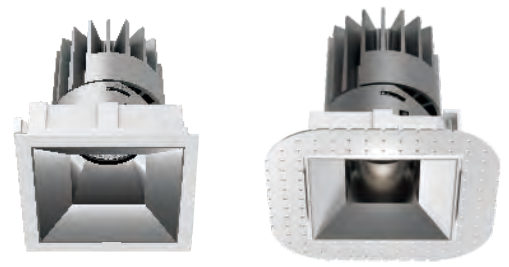


#### • Cutout

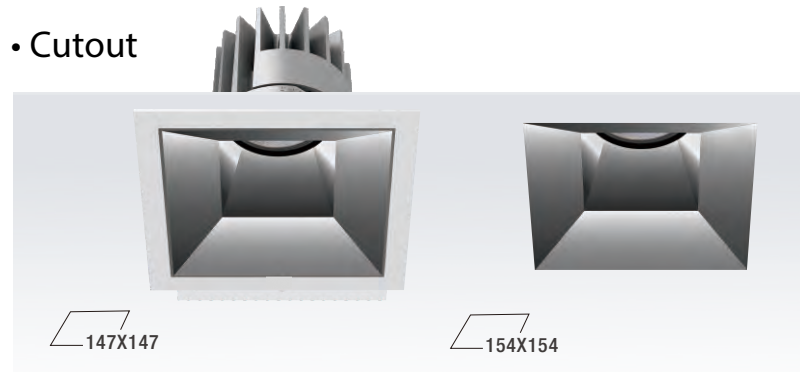


### Photometrics:

#### 25W

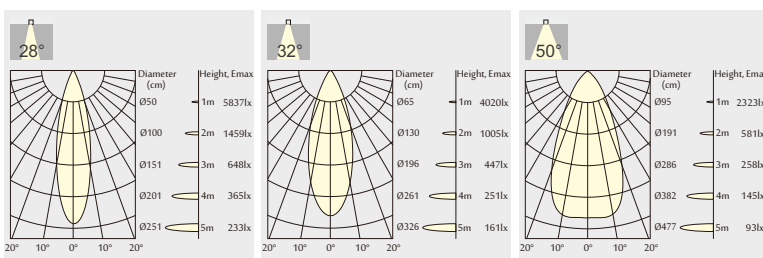

#### 38W

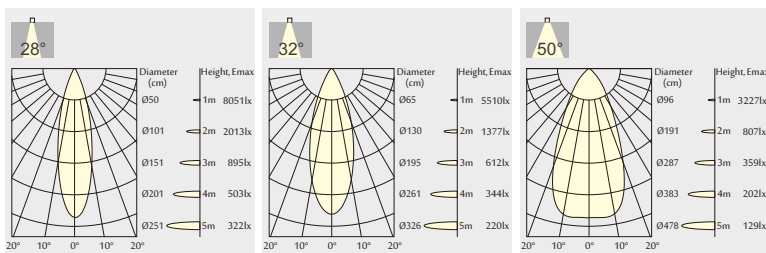

Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## Ordering Key:

ILDRLHDGF

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	S. REFLECT	ADDITIONAL OPTIONS
ILDRLHDGF	13WSQ - 4INSQ/ 900	27K - 2700K	S - SILVER	S - SILVER	DM - 0-10V DIMMING
	18W4S- 4INSQ/ 1,200	3K - 3000K	B - BLACK	CB- CHROME BLACK	AG - ANTI GLARE ACCESSORY
	18W5S- 5INSQ/ 1,400	4K - 4000K	W - WHITE	M - MATTE	EM - EMERGENCY BACKUP
	25W5S - 5INSQ / 1,800	5K - 5000K		W - WHITE	
	25W6S - 6INSQ /1,900			B - BLACK	
	38SQ - 6INSQ / 2,700			G - GOLD	

SAMPLE ITEM NUMBER: ILDRLHDGF 13w 27K B M DM

