


## BEDFORD Direct/Indirect LINEAR LIGHT




### Description:

Our Bedford Direct/Indirect Linear Light ensures an even illumination across any surface. Easily **LINKABLE** to create any length or shape with our perfect flush edge connection. With an IP40 rating and multiple mounting options, this fixture is perfect for any office, retail, or lobbies.

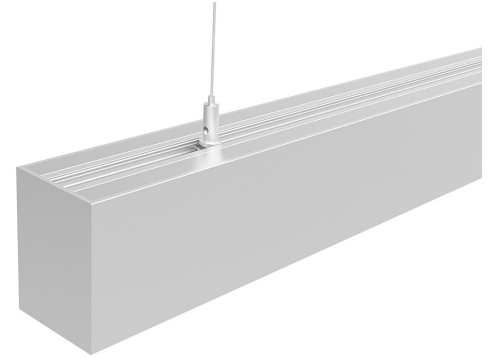


### Features:

- Voltage: 100~277VAC
- Housing Material: Aluminum
- Wattage: 44W: 17W up/ 27W down  
89W: 36W up/ 53W down  
Indirect Only: 23W/4FT or 46W/8FT
- Input Power: 101LM/W, 11W/FT or 1,100 LM/FT
- IP Rating: IP40
- CRI >90
- Available Color Options: 2700K, 3000K, 3500K, 4000K, 5000K, 6000K, or CCT tunable.
- Available Mounting Options: Wall mounted or Pendant.
- Customizable Lengths Available, flush edge connection
- L70 Lifetime: >50,000 hours.
- Available Finish Options: Silver, White, Black, Red, or Gold
- 1-10V dimming option available.
- Lighting controls option available.
- 7 Year Warranty.

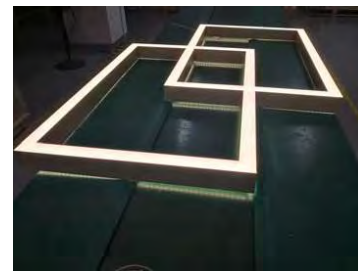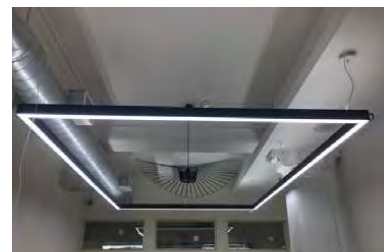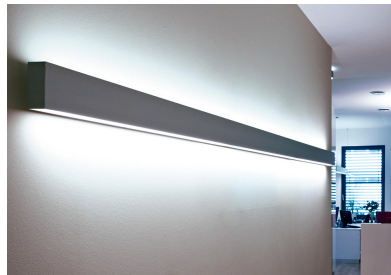

## Dimensions:

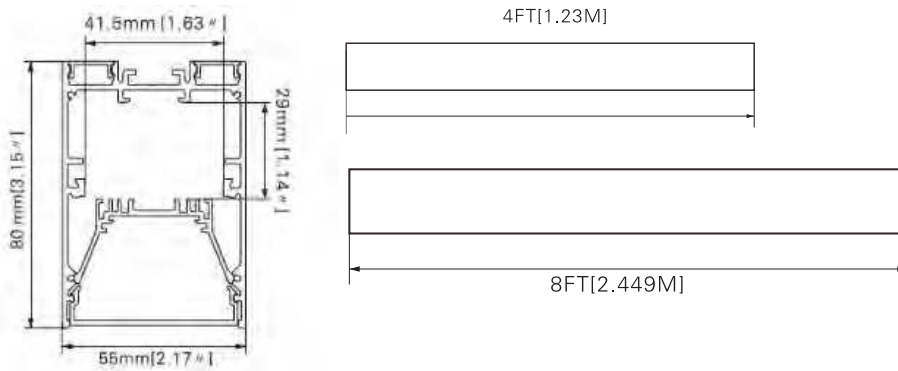

Custom Design - including square, T shape with seamless edge.

## Installation Accessories:



Pendant



ILBVLPTB-NPF-6M\*



ILBVLPTB-PF2-6M\*

**\*Canopy Color Options:** For suspension in either black or white. Please choose your preference in the ordering key.





Wall mounted



ILBVL-WMS-BF

ILBVLPTB-NPF-6M: Suspension kit / 6ft wire / 1 hole canopy  
ILBVLPTB-PF2-6M: Suspension kit / 6ft wire / 2 holes canopy  
ILBVL-WMS-BF: Wall Mounting Clips / 1set includes 2pcs

## Disassembly Accessories:

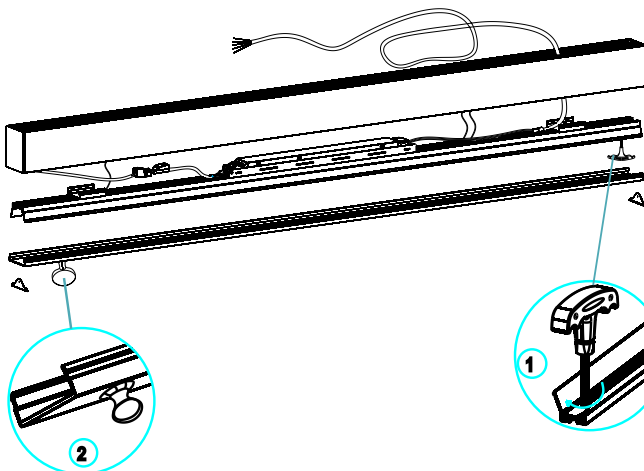

ILBVLDA: Disassembling tools



## Ordering Key:

ILLLBLBV				
SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILLLBLBV	444 - 4FT / 44W / 4,455	27 - 2700K	S - SILVER	DM - 1-10V DIMMING
	889 - 8FT / 89W / 8,910	3 - 3000K	W - WHITE	MS - MOTION SENSOR
	423 - 4FT/ 23W / 2,350*	35 - 3500K	B - BLACK	EM - EMERGENCY BACKUP
	846 - 8FT/ 46W / 4,650*	4 - 4000K	R - RED	BC- BLACK CANOPY FOR SUSPENSION
	X - SPECIFY CUSTOM LENGTH	5 - 5000K	G - GOLD	WC - WHITE CANOPY FOR SUSPENSION
		6 - 6000K		LV - LOUVER
		CCT - 3000K-3500K-4000K tunable		L - LINKABLE

SAMPLE ITEM NUMBER: ILLLBLBV 444 4 B DM L

\*23W & 46W are only available as an indirect option

## Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.





## Controls:

- This LED fixture is equipped with 1-10V dimming that works universally with any standard 1-10V control or dimmer.


## Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.


## Photometrics:

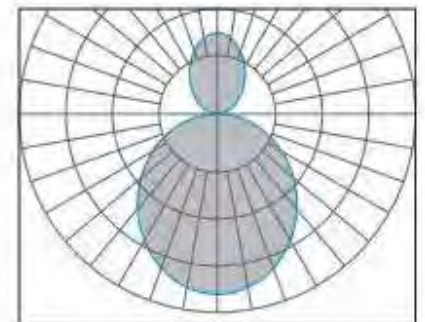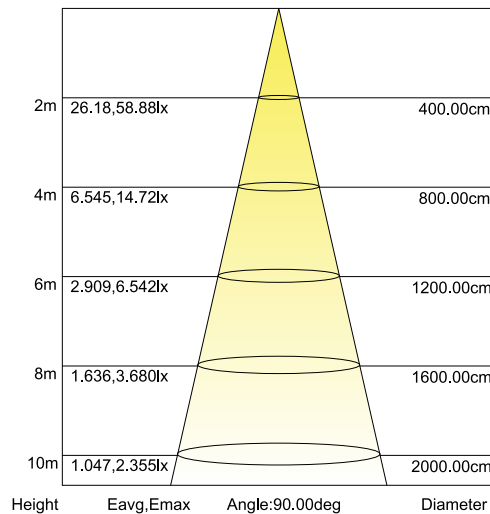


## Connectors:




ITEM NUMBER: LC



90L sets




Mechanical connection




Electrical connection


Dimension: L609.6mm(2ft) \* W609.6mm(2ft)




ITEM NUMBER: TC



90T sets




Mechanical connection




Electrical connection


Dimension: L1219.2mm(4ft) \* W609.6mm(2ft)




ITEM NUMBER: XC



90X sets




Mechanical connection




Electrical connection


Dimension: L1219.2mm(4ft) \* W1219.2mm(4ft)




ITEM NUMBER: CC



90N sets




Mechanical connection




Electrical connection


Dimension: L609.6mm(2ft) \* W609.6mm(2ft)




ITEM NUMBER: VC



90W sets



Mechanical connection



Electrical connection

Dimension: L609.6mm(2ft) \* W609.6mm(2ft)

## Connection Ordering Key:

ILBV			
SERIES NUMBER		CONNECTION	ADDITIONAL OPTIONS
ILBV		LC - L SHAPED CONNECTOR	
		TC - T SHAPED CONNECTOR	
		XC - X SHAPED CONNECTOR	
		CC - CORNER SHAPED CONNECTOR	
		VC - V SHAPED CONNECTOR	