


Date:	_____
Project:	_____
Price:	_____

## VANDERBILT WALL WASHER DOWNLIGHT:

### Description:

Our Vanderbilt Wall Washer Downlights are a new design with the widest variety of reflectors and trims. The array of wattages, sizes, and trim colors, making it ideal for all applications. A smart energy saving solution for offices and supermarkets applications.

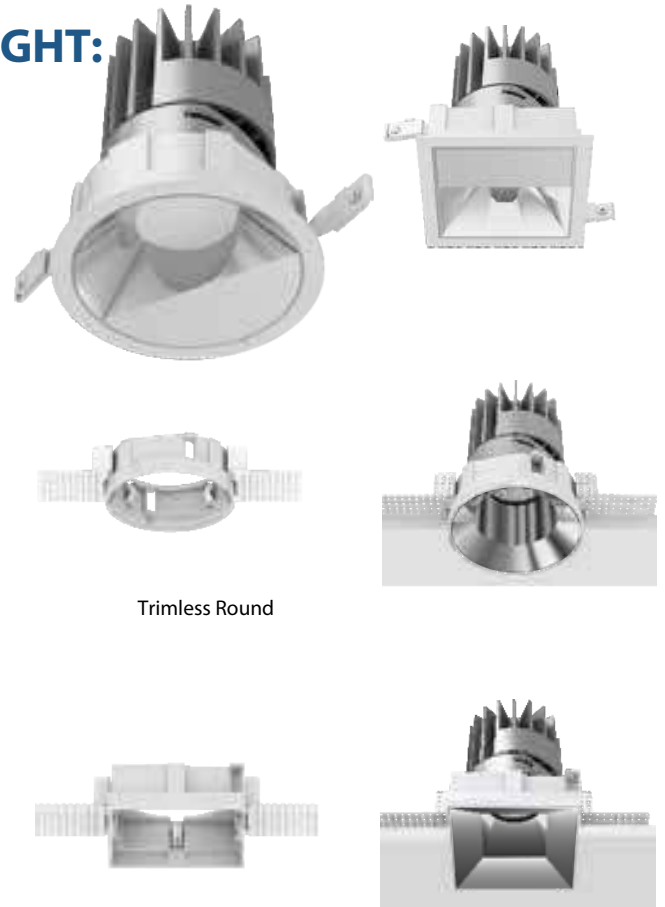

### Features:













- Secondary Reflector:



Matte

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, 5000K.
- Operating temperature: -5F - 104F
- Finish option: Black, White, Silver
- 7 Year Warranty.


### Dimensions:

Cutout Diameter(IN)	3.9IN	4.9IN	5.9IN	3.7IN	4.8IN	5.8IN
Trim Diameter(IN)	 4IN	 5IN	 6IN	 4IN	 5IN	 6IN
Height (IN)	 4.9IN	 6.1IN	 7.4IN	 4.9IN	 6.1IN	 7.4IN



Date:	_____
Project:	_____
Price:	_____

## Explosion Diagram:

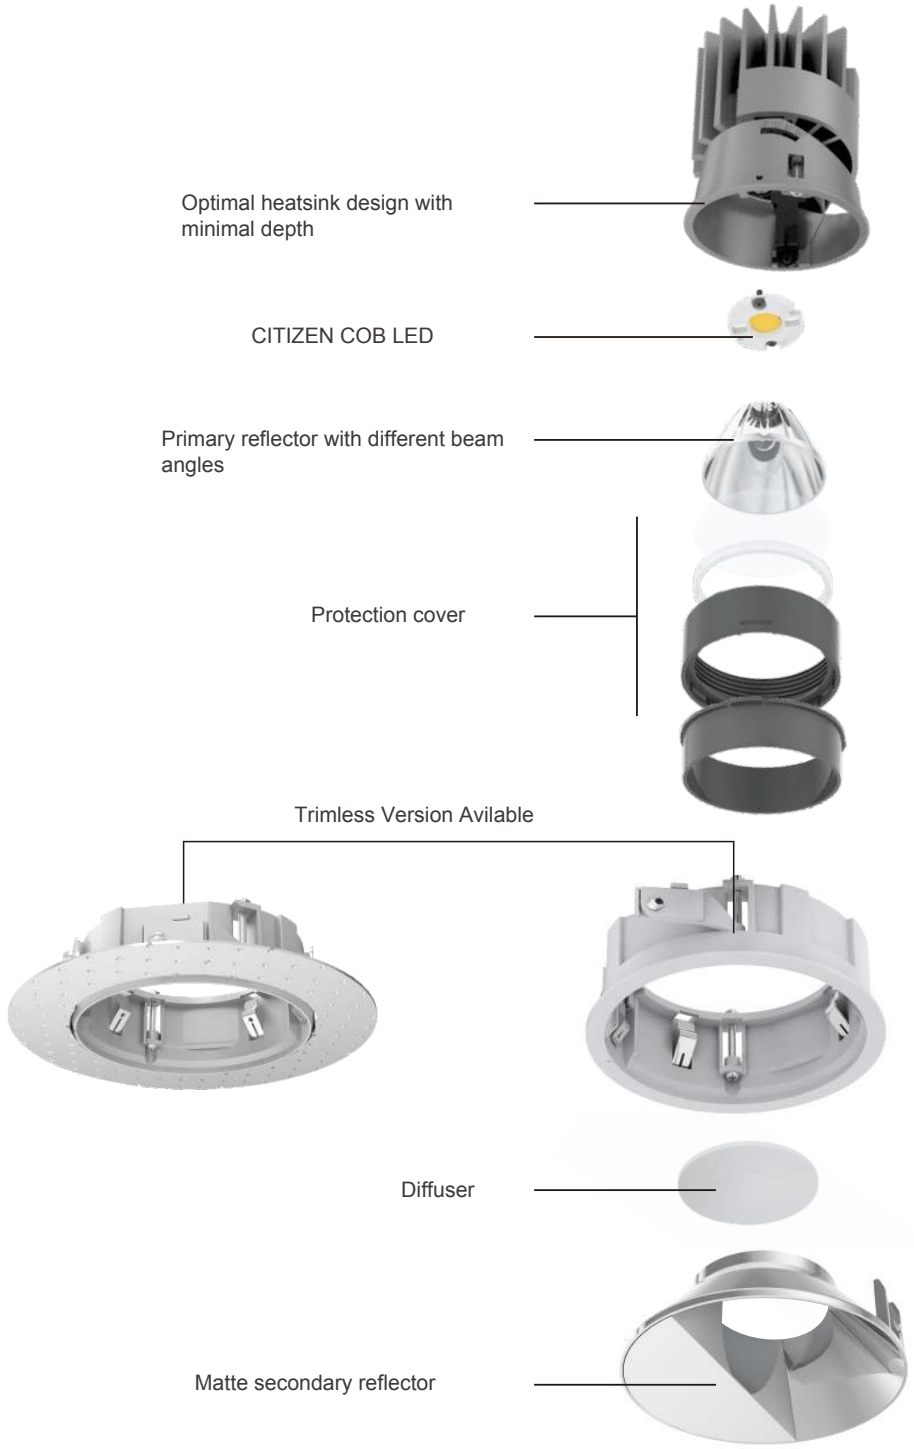

Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## CIRCULAR 4 INCH:


### Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

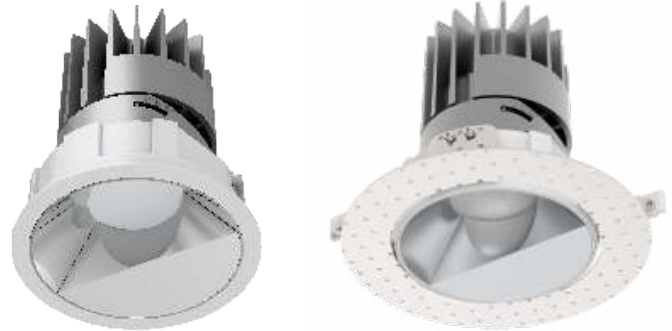

- Cutout

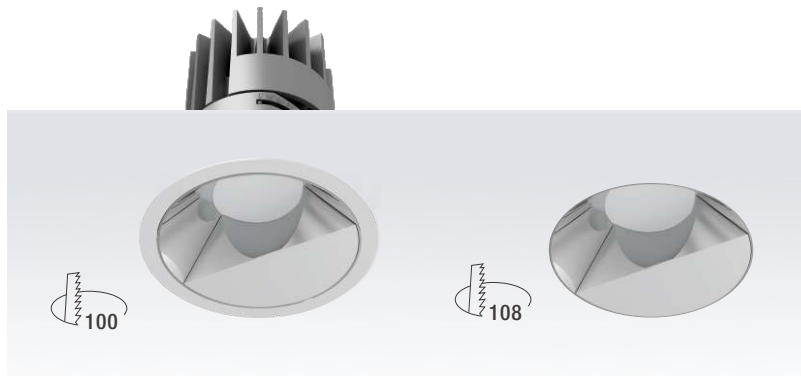


### Dimensions:


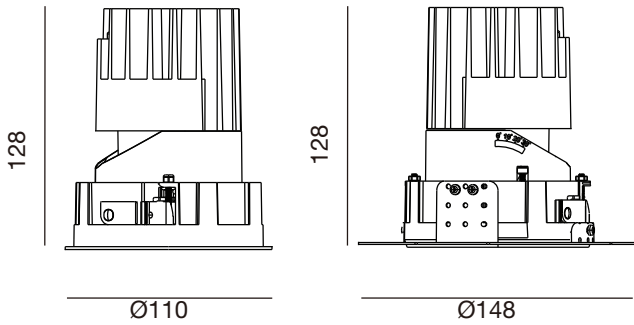


### Photometrics:

#### 13W

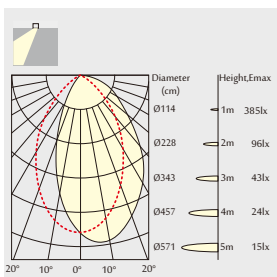

#### 18W

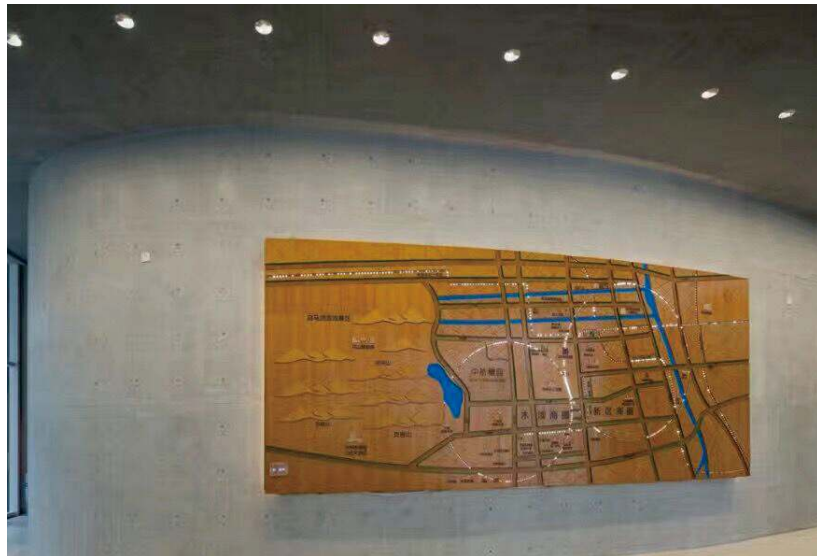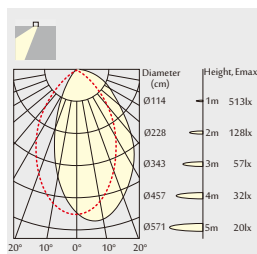



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

## CIRCULAR 5 INCH:


### Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

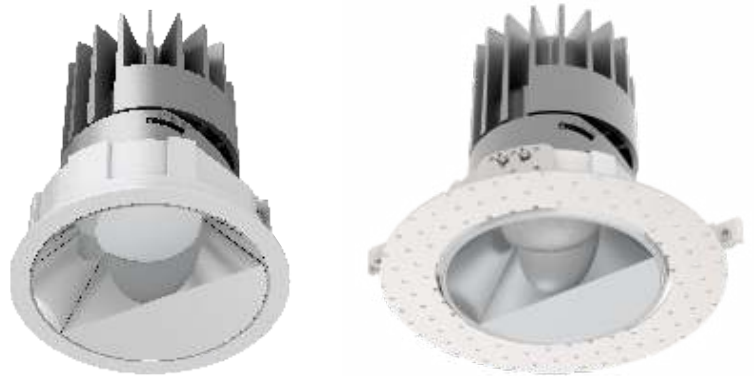

### Dimensions:

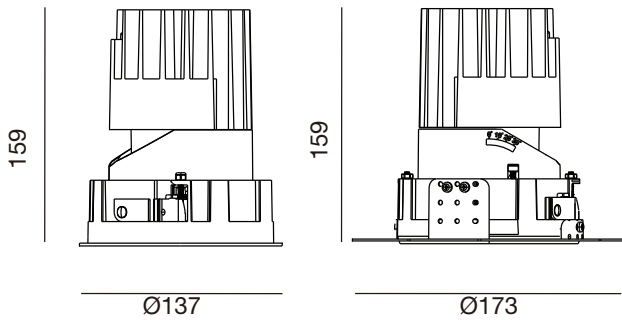


- Cutout

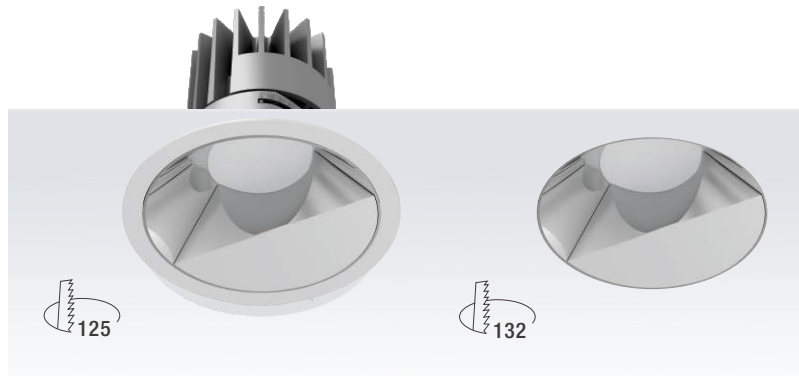


### Photometrics:

#### 18W

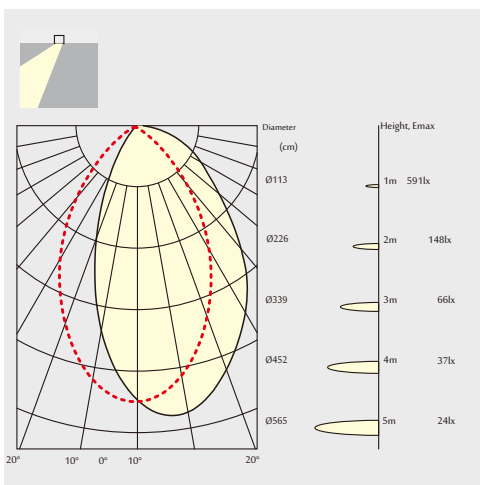

#### 25W

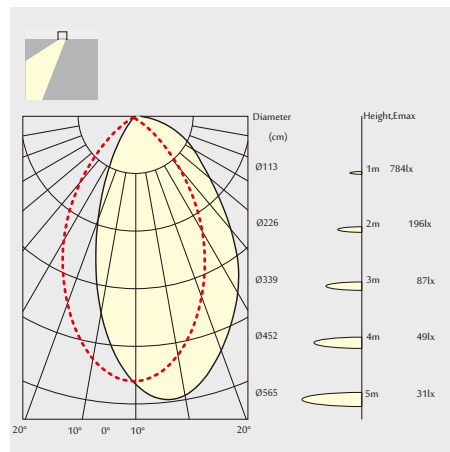



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

## CIRCULAR 6 INCH:


### Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

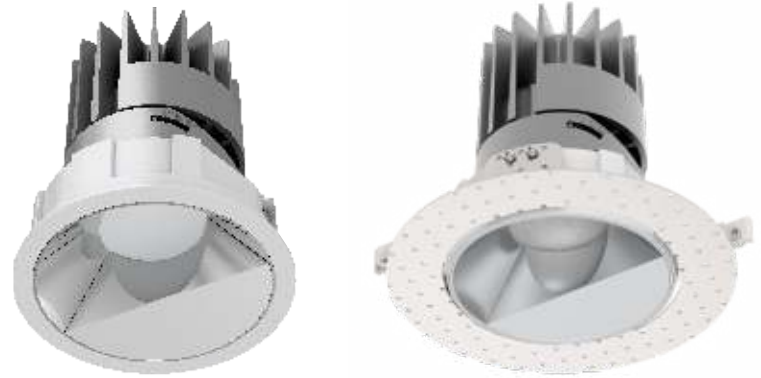

### Dimensions:

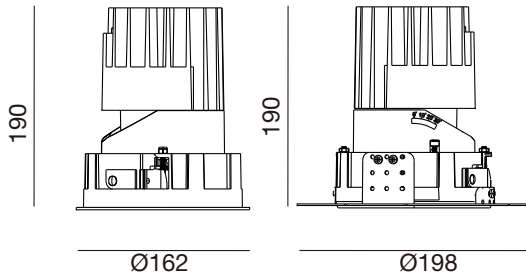


- Cutout

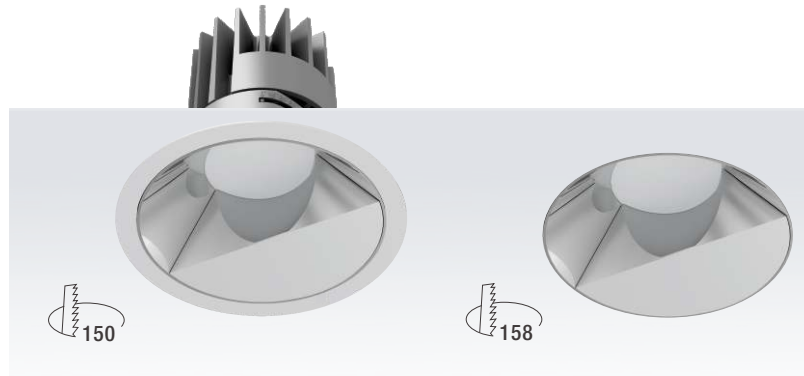


### Photometrics:

#### 25W

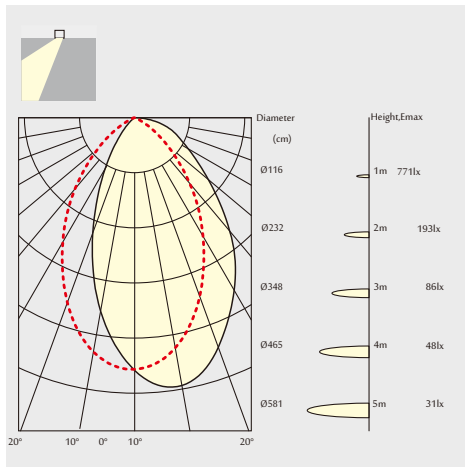

#### 38W

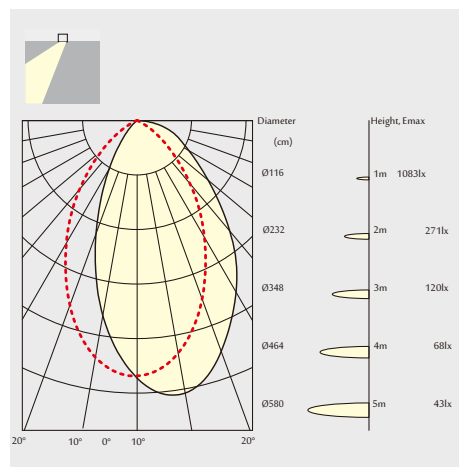

Date:	_____
Project:	_____
Project:	_____
Price:	_____

## Ordering Key:

ILDRLVDGF

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	S. REFLECTOR	ADDITIONAL OPTIONS
ILDRLVDGF	13W4R- 4INRD / 480	27K - 2700K	S - SILVER	M - MATTE	DM - 1-10V DIMMING
	18W4R - 4INRD / 650	3K - 3000K	B - BLACK		DD - DALI DIMMING
	18W5R - 5INRD / 750	4K - 4000K	W - WHITE		EL - PHASE DIMMING
	25W5R- 5INRD / 1,000				AG - ANTI GLARE ACCESSORY
	25W6R - 6INRD / 1,000				EM - EMERGENCY BACKUP
	38W6R - 6INRD / 1,400				DF - DIFFUSER

SAMPLE ITEM NUMBER: ILDRLVDGF 18W4R 27K B M DM



Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## SQUARE 4 INCH:

### Features:



- Secondary Reflector:




Matte

- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

### Dimensions:

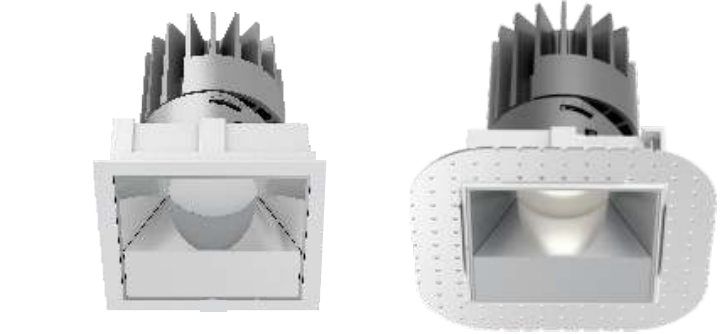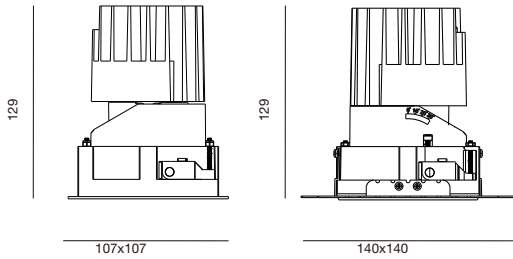


- Cutout

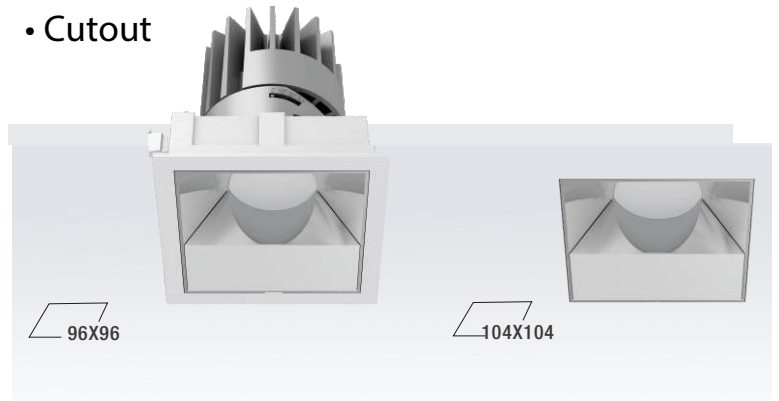


### Photometrics:

#### 13W

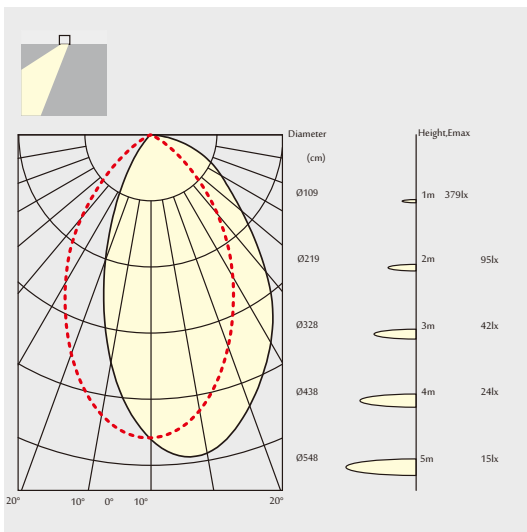

#### 18W

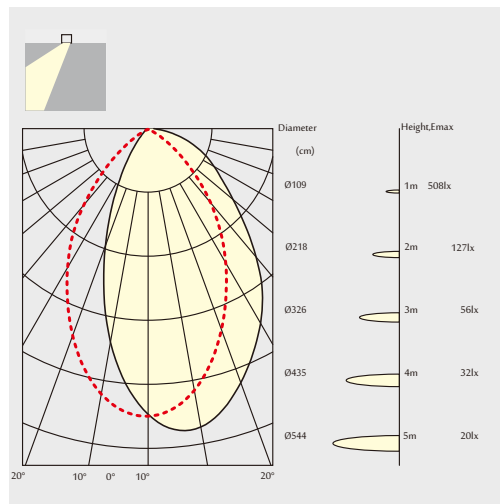



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

## SQUARE 5 INCH:


### Features:

- Secondary Reflector:




Matte

- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

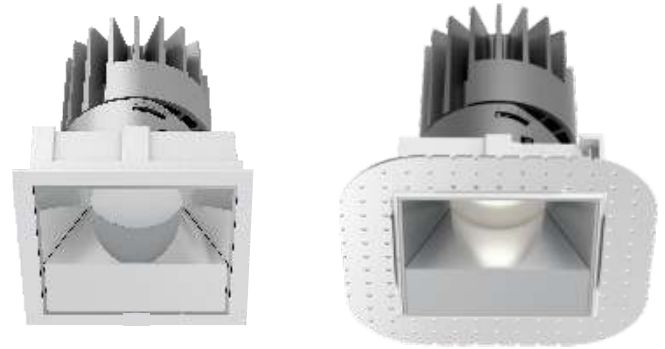

### Dimensions:

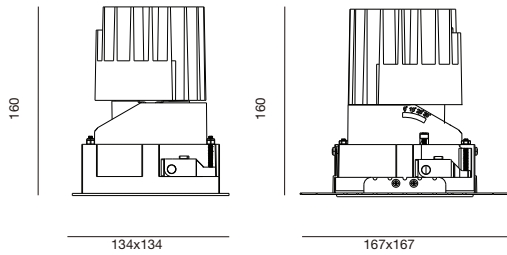


- Cutout




### Photometrics:

#### 18W

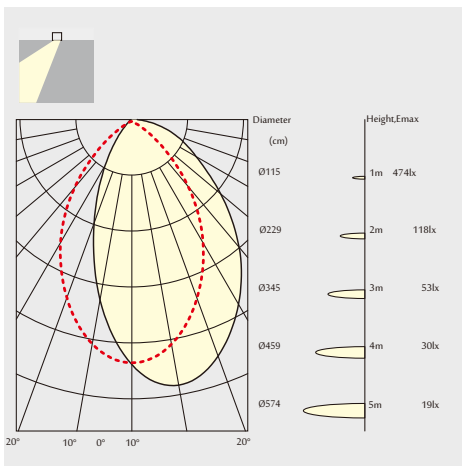

#### 25W

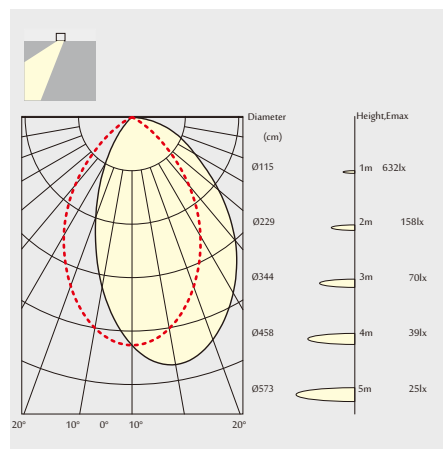



Date:	_____
Project:	_____
Price:	_____

## SQUARE 6 INCH:


### Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

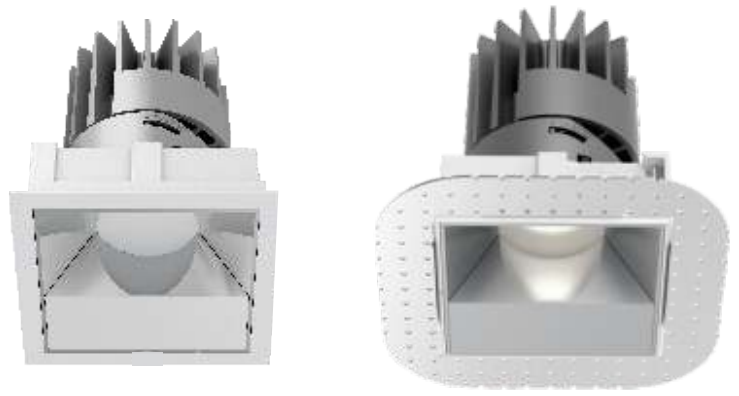

### Dimensions:

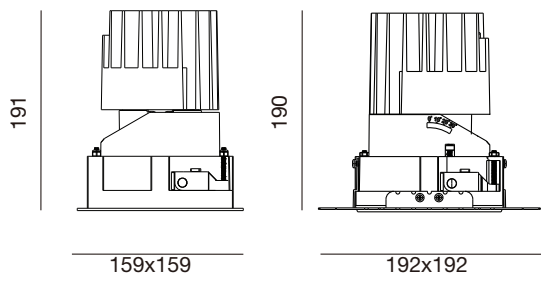


- Cutout

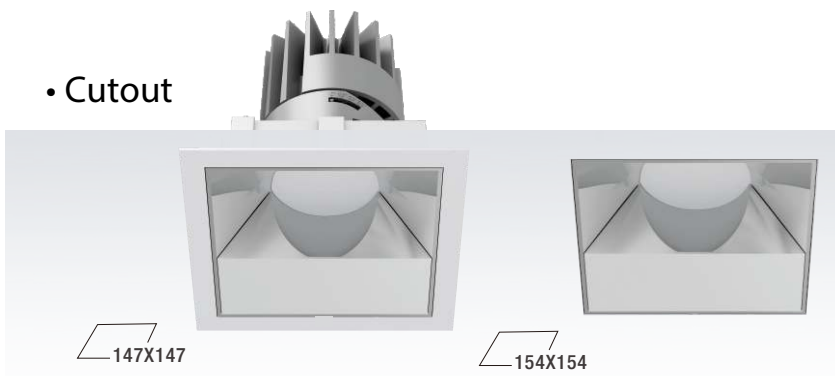


### Photometrics:

#### 25W

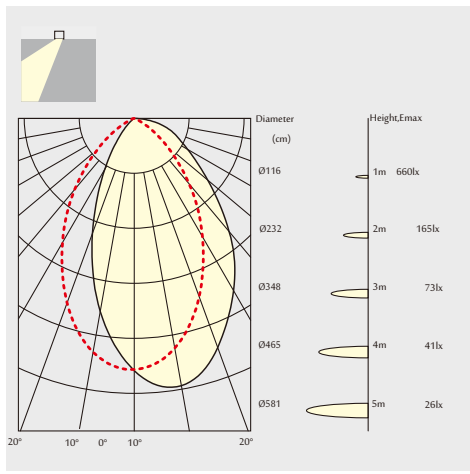

#### 38W

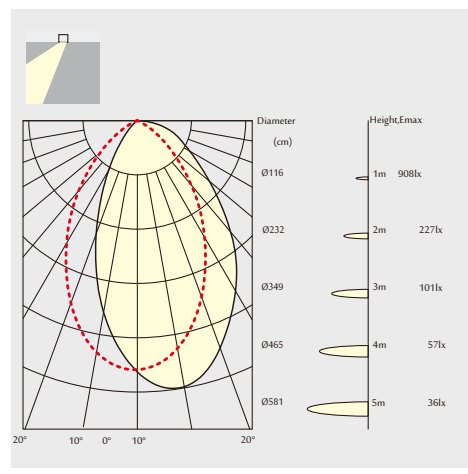

Date:	_____
Project:	_____
Price:	_____

## Ordering Key:



SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	S. REFLECTOR	ADDITIONAL OPTIONS
ILDRLVDGF	13W4S - 4INSQ / 480	27K - 2700K	S - SILVER	M - MATTE	DM - 1-10V DIMMING
	18W4S - 4INSQ / 650	3K - 3000K	B - BLACK		DD - DALI DIMMING
	18W5S - 5INSQ / 680	4K - 4000K	W - WHITE		EL - PHASE DIMMING
	25W5S - 5INSQ / 880				AG - ANTI GLARE ACCESSORY
	25W6S - 6INSQ / 900				EM - EMERGENCY BACKUP
	38W6S - 6INSQ / 1,300				DF - DIFFUSER

SAMPLE ITEM NUMBER: ILDRLVDGF 18W4S 27K B M DM



Date: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Price: \_\_\_\_\_

## Mounting:

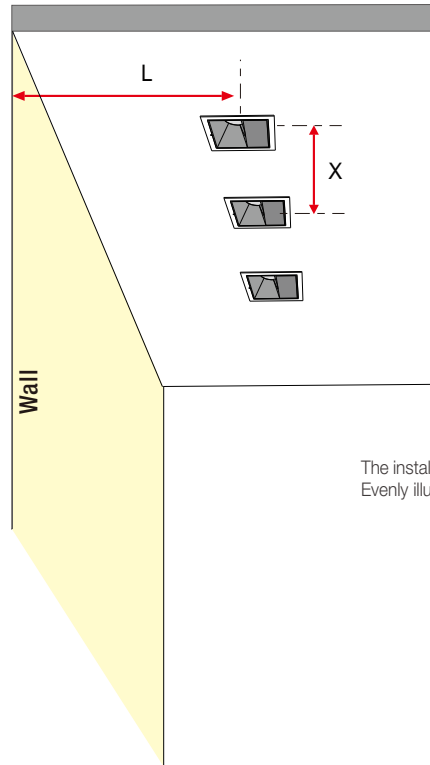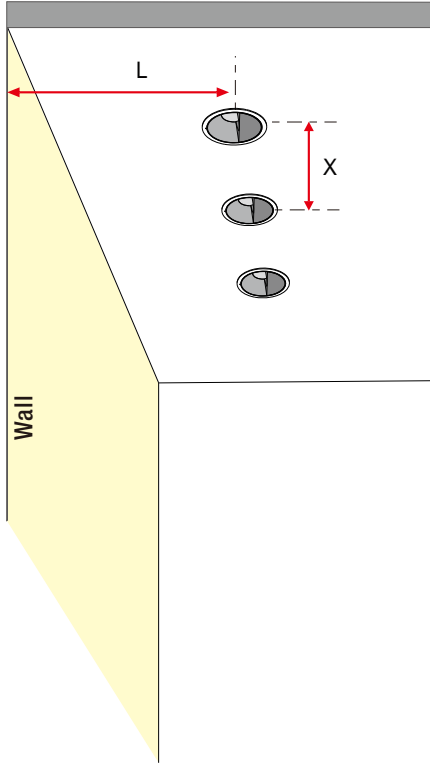

The installation is based on 3M height wall  
 Evenly illuminated wall without dark shadow at the corner

Suggestions on Installation Distance for Uniform Lighting Effects

L(mm)	X(mm)	MODEL	L(mm)														
			500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
L	X	4IN	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
		5IN	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
X/2	X	6IN	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200

L(mm)	X(mm)	MODEL	L(mm)														
			500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
L	X	4IN	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
		5IN	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
X/2	X	6IN	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250

