


Date:	_____
Project:	_____
Price:	_____

VANDERBILT WALL WASHER DOWNLIGHT:

Description:

Our Vanderbilt Wall Washer Downlights are a new design with the widest variety of reflectors and trims. The array of wattages, sizes, and trim colors, making it ideal for all applications. A smart energy saving solution for offices and supermarkets applications.

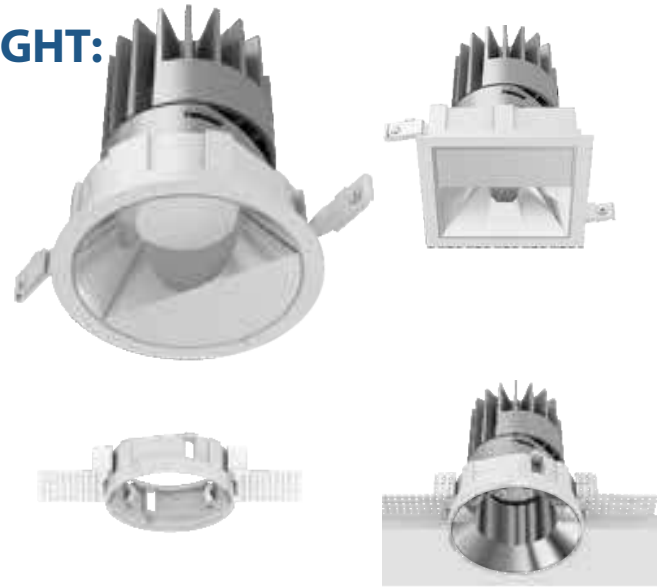

Trimless Round



Trimless Square













- Secondary Reflector:



Matte

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, 5000K.
- Operating temperature: -5F - 104F
- Finish option: Black, White, Silver
- 7 Year Warranty.


Dimensions:

Cutout Diameter(IN)	3.9IN	4.9IN	5.9IN	3.7IN	4.8IN	5.8IN
Trim Diameter(IN)	 4IN	 5IN	 6IN	 4IN	 5IN	 6IN
Height (IN)	 4.9IN	 6.1IN	 7.4IN	 4.9IN	 6.1IN	 7.4IN



Date:	_____
Project:	_____
Price:	_____

Explosion Diagram:

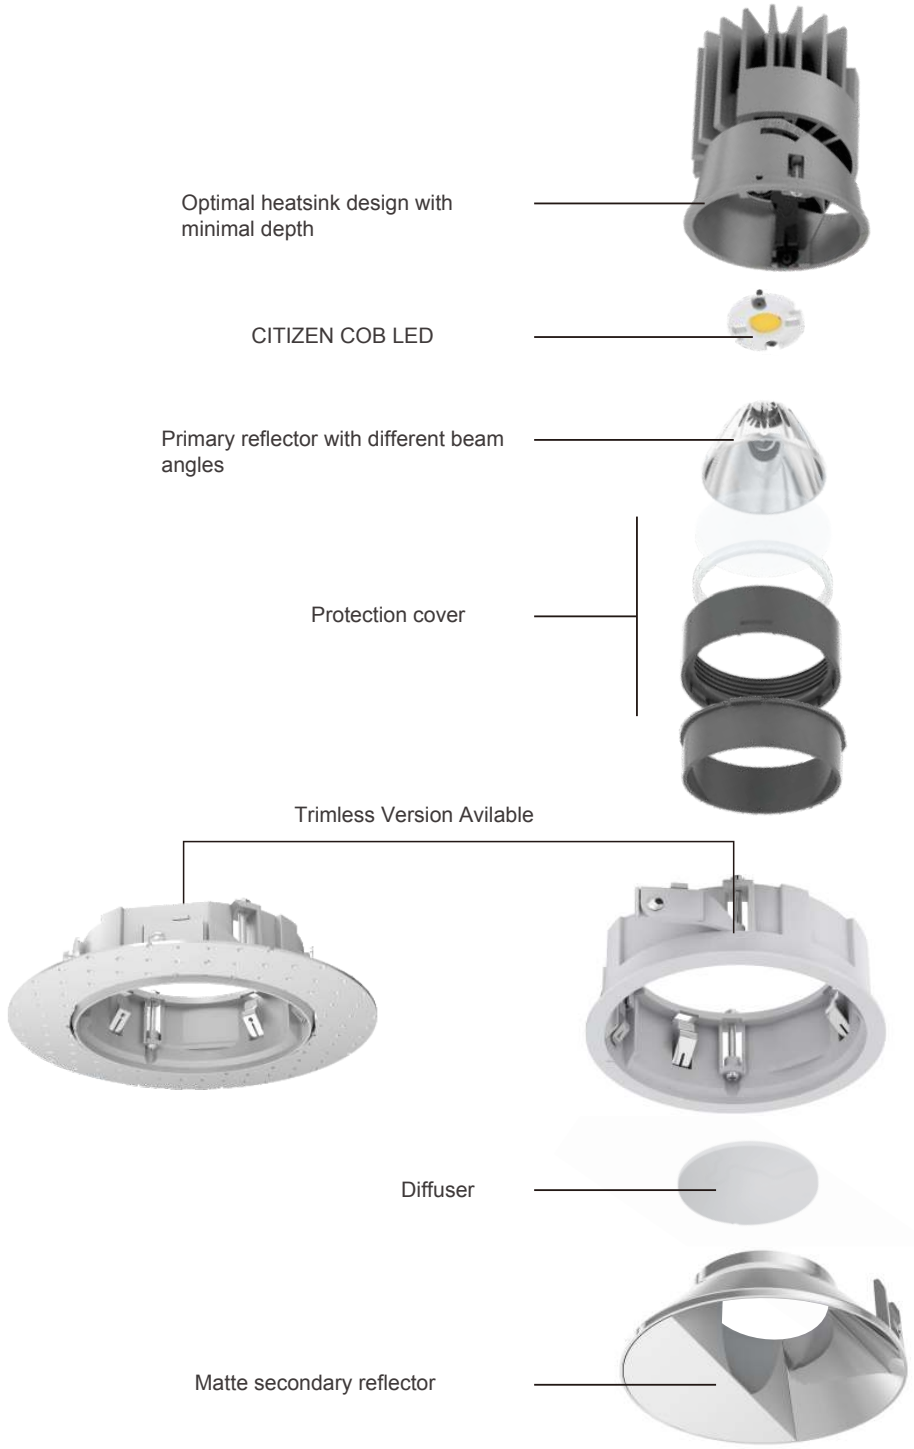

Date: _____
 Project: _____
 Price: _____

CIRCULAR 4 INCH:


Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

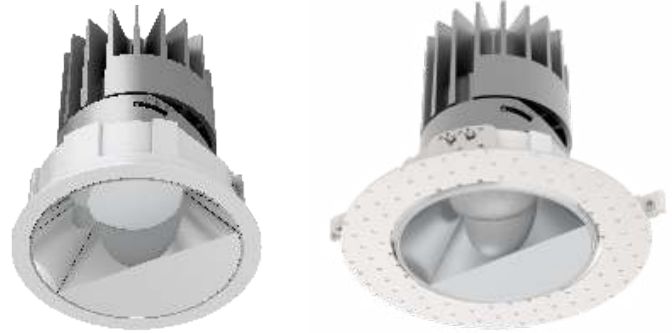

- Cutout

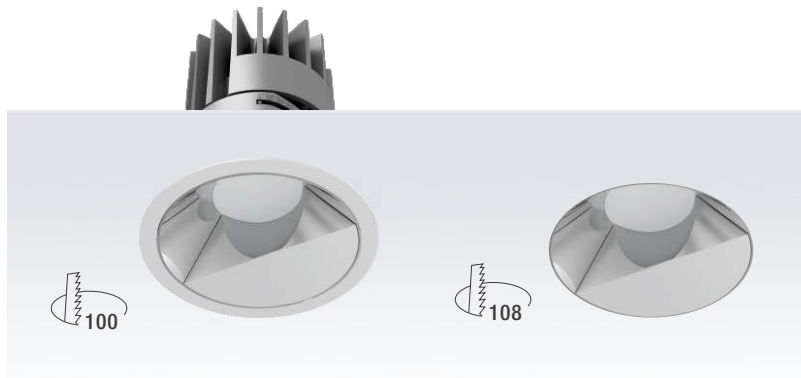


Dimensions:


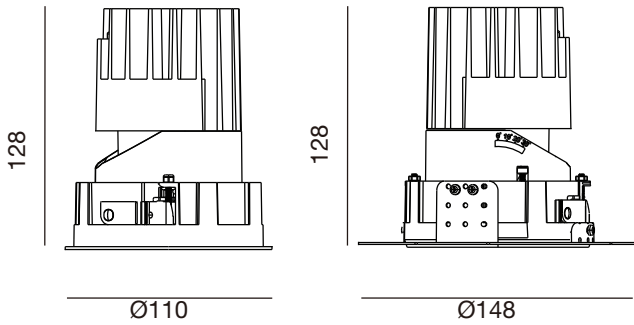


Photometrics:

13W

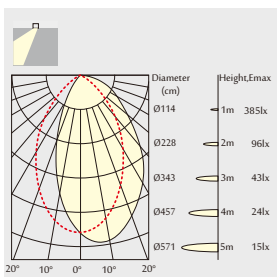

18W

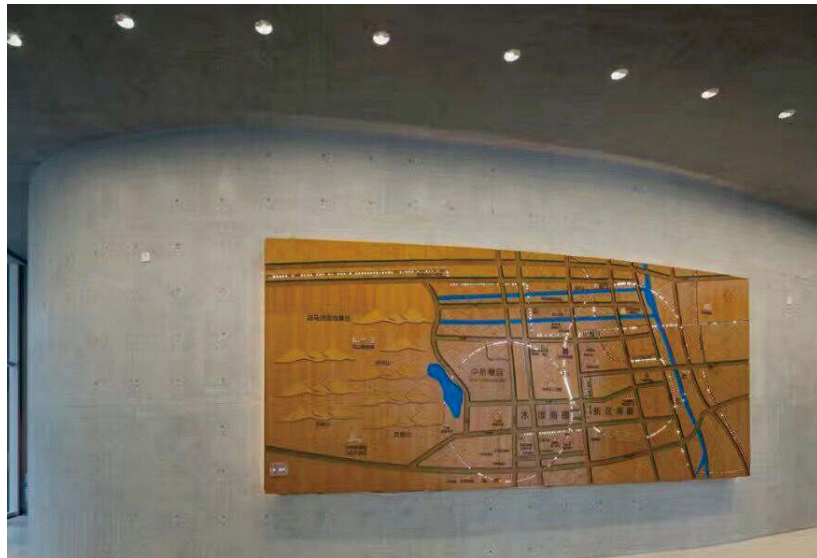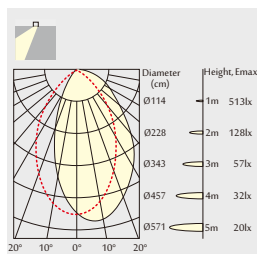



i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

CIRCULAR 5 INCH:


Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

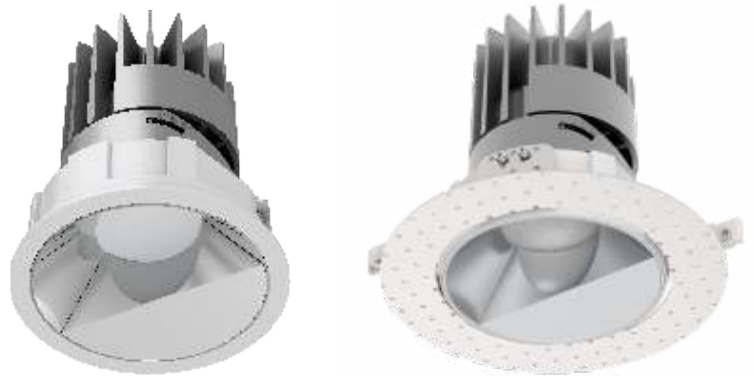

Dimensions:

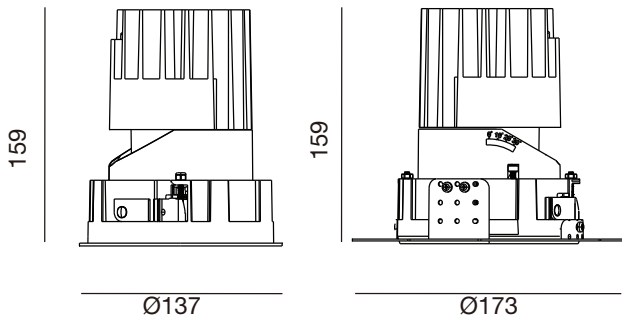


- Cutout

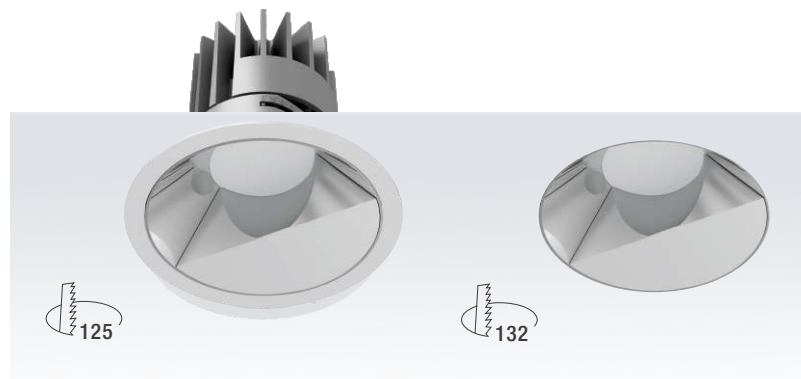


Photometrics:

18W

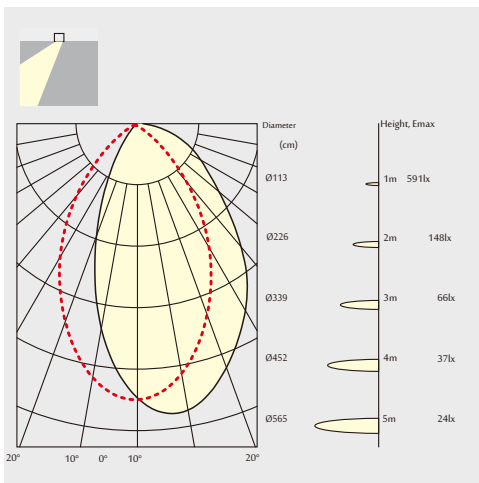

25W

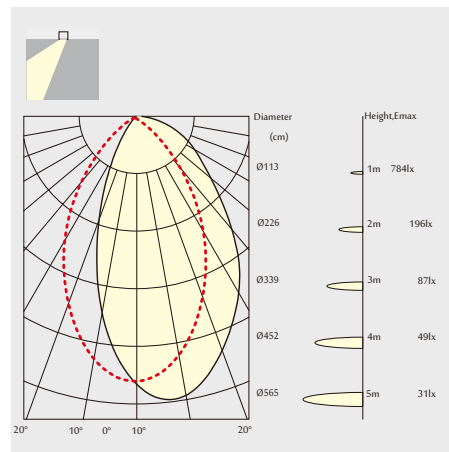



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

CIRCULAR 6 INCH:


Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

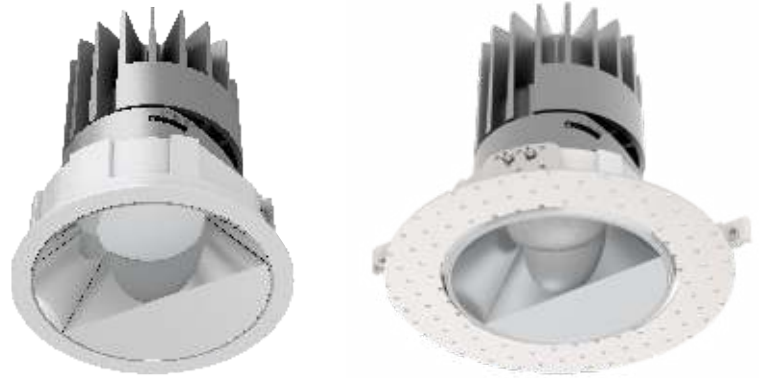

Dimensions:

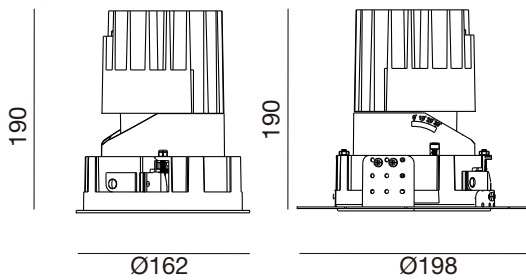


- Cutout

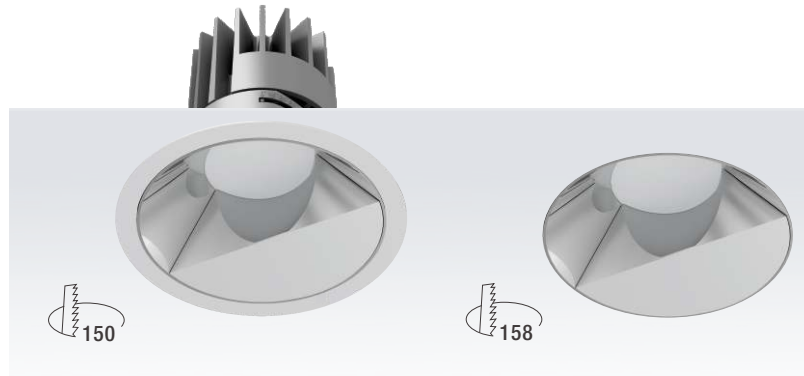


Photometrics:

25W

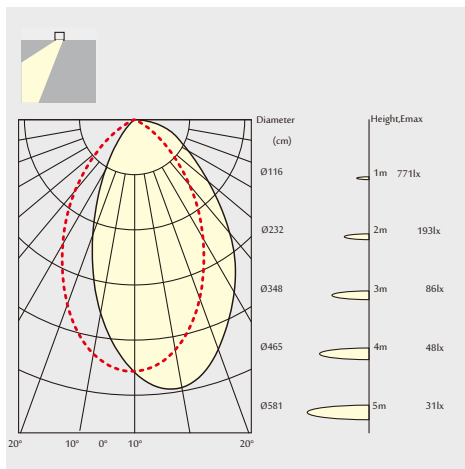

38W

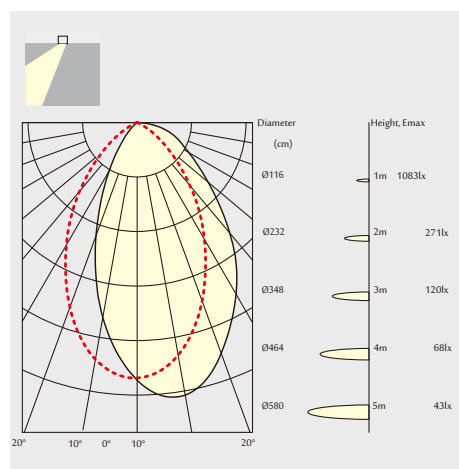

Date:	_____
Project:	_____
Price:	_____

SQUARE 4 INCH:

Features:



- Secondary Reflector:




Matte

- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

Dimensions:

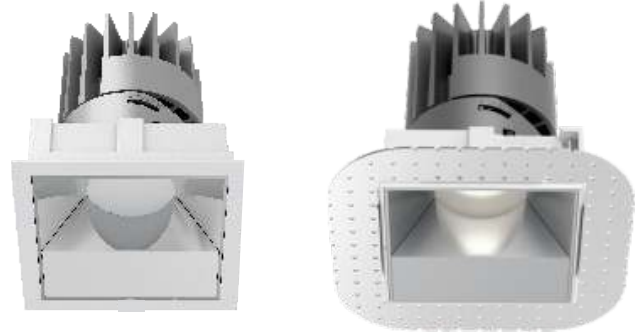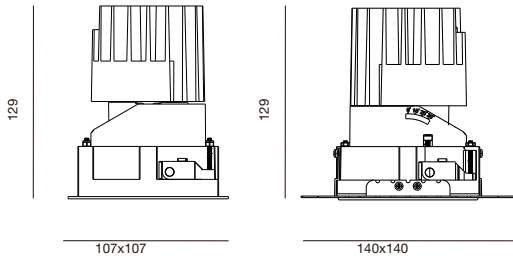


- Cutout

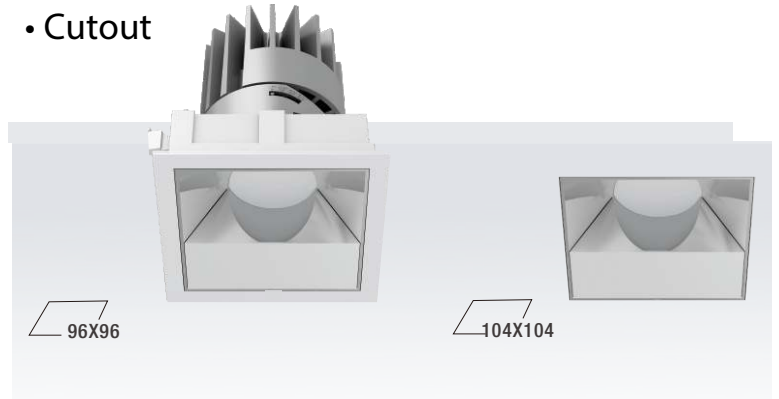


Photometrics:

13W

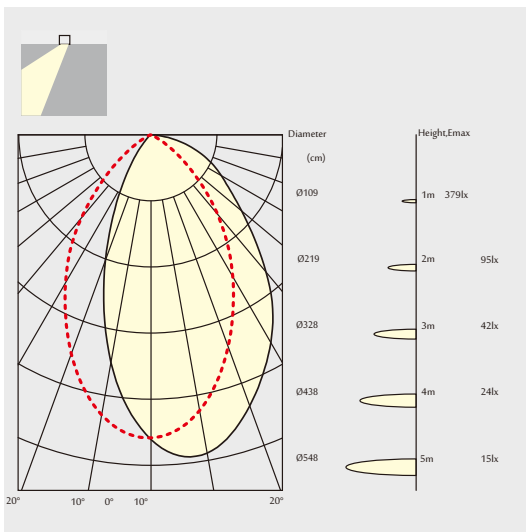

18W

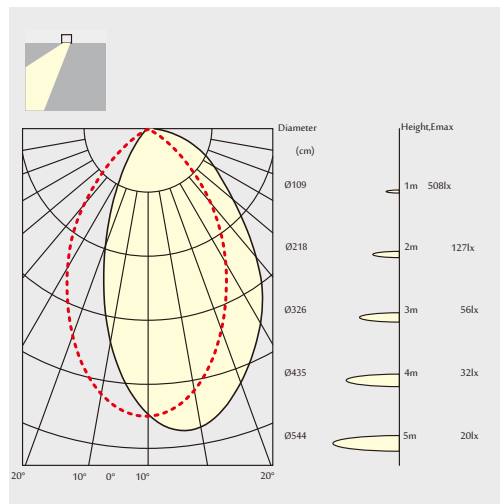



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

SQUARE 5 INCH:


Features:

- Secondary Reflector:




Matte

- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

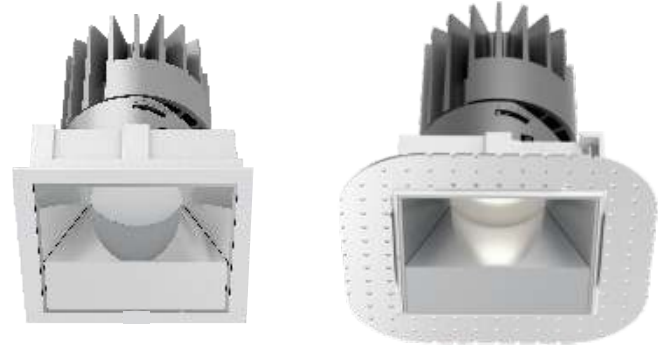

Dimensions:

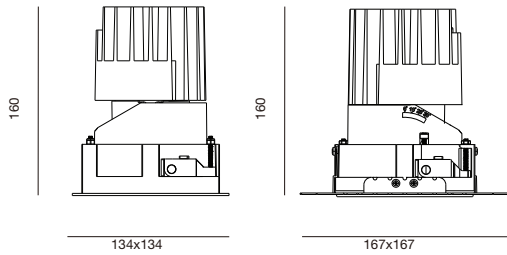


- Cutout




Photometrics:

18W

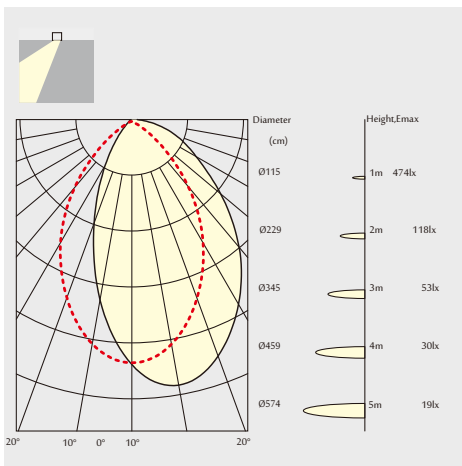

25W

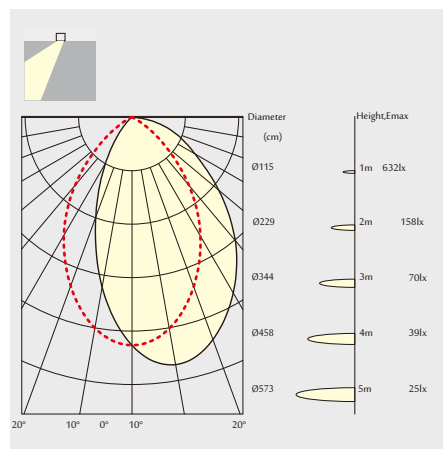

Date:	_____
Project:	_____
Price:	_____

SQUARE 6 INCH:


Features:

- Secondary Reflector:




Matte


- Dimming: 1-10V, Dali, Phase
- CRI>90
- Available in 2700K, 3000K or 4000K

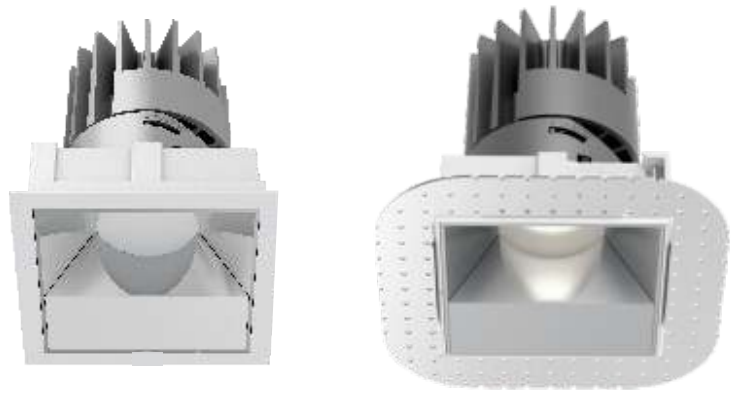

Dimensions:

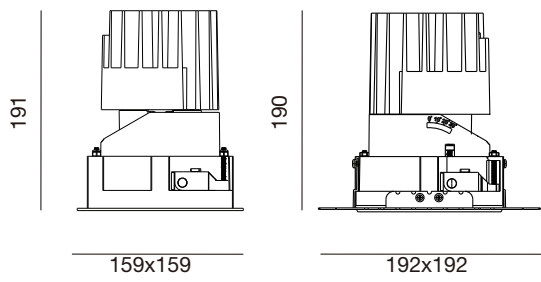


- Cutout

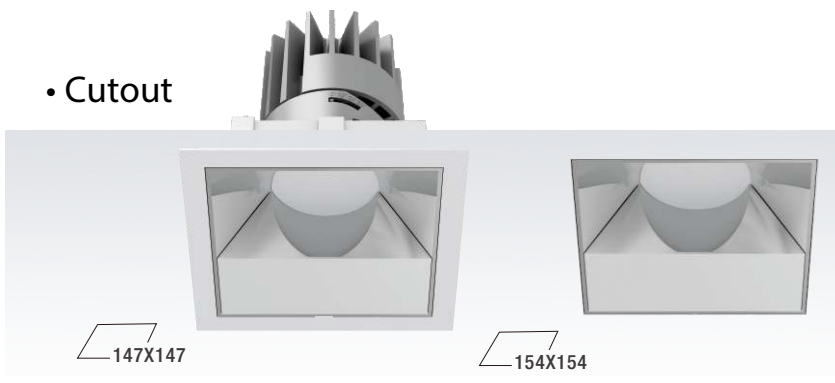


Photometrics:

25W

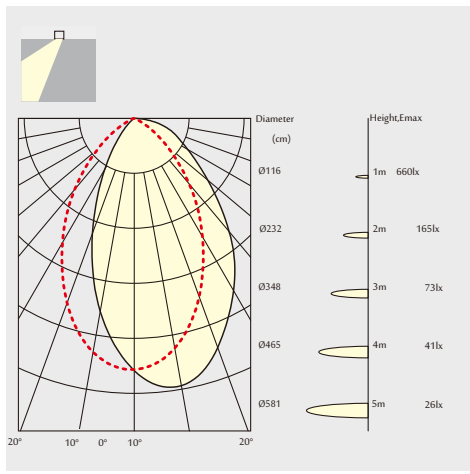

38W

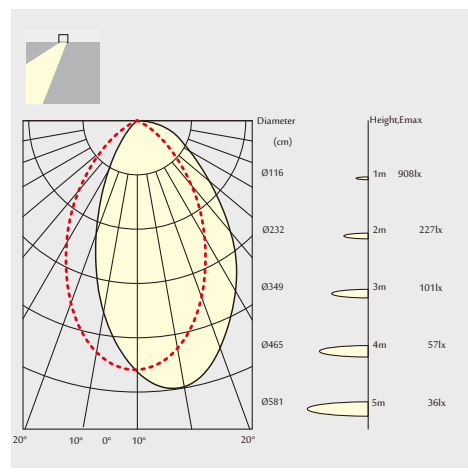

Date: _____
 Project: _____
 Price: _____

Ordering Key:



SERIES NUMBER	SIZE	SHAPE	WATTAGE	CCT	TRIM FINISH	REFLECTOR FINISH	ADDITIONAL OPTIONS
ILDLVDEL	4 - 4IN	RD - ROUND	13W - 13W	27K - 27K	S - SILVER	M - MATTE	DM - 1-10V DIMMING
	5 - 5IN	SQ - SQUARE	18W - 18W	3K - 3K	B - BLACK		DD - DALI DIMMING
	6 - 6IN		25W - 25W	4K - 4K	W - WHITE		EL - PHASE DIMMING
			38W - 38W		T - TRIMLESS		AG - ANTI GLARE ACCESSORY
							EM - EMERGENCY BACKUP
							DF - DIFFUSER

SAMPLE ITEM NUMBER: ILDLVDEL 4 RD 13W 27K B M DM



Date: _____
 Project: _____
 Price: _____

Mounting:

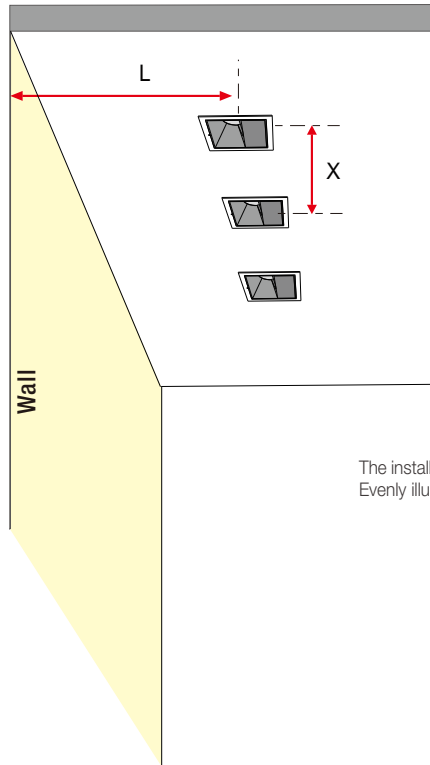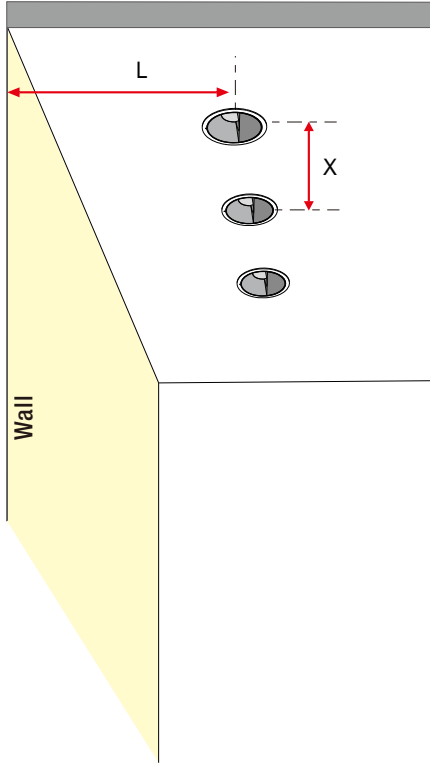

The installation is based on 3M height wall
 Evenly illuminated wall without dark shadow at the corner

Suggestions on Installation Distance for Uniform Lighting Effects

L (mm)	X (mm)	MODEL	L (mm)														
			500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
L	X	4IN	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
		5IN	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
X/2	X	6IN	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200

L (mm)	X (mm)	MODEL	L (mm)														
			500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
L	X	4IN	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
		5IN	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
X/2	X	6IN	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250

