



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

LED Gramercy Light Bar

Description:


Our LED Gramercy Light Bar ensures an even illumination across any surface, being that it's available in a variety of sizes & CCT options. This fixture is ideal for showcases, display cases, toe kicks, accent, cove lighting, and undercabinet lighting.



Features:

- Input Power: 120VAC
- Power Consumption: 4W - 24W
- Includes: 1) Coupler 2) Mounting clips 3) Screws
- CRI >90
- Available Color Options: 3000K, 4000K, 5000K or 6000K
- Finish: White
- Available Length Options: 10"/16"/21"/26"/28"/33"/39"/45"/56.5"/68.5"
- Operating Temperature: -4°F ~ 104°F
- L70 Lifetime: >50,000 hours
- 0-10V dimming option available.
- Lighting controls option available.
- 7 Year Warranty

Dimensions:

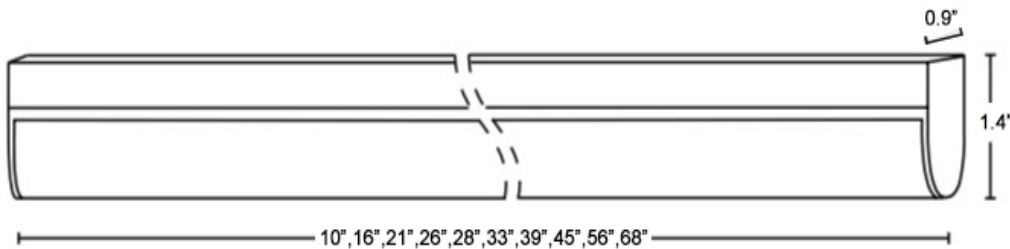









i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

1)Basic Accessories Included:

<p>Coupler:Seamless Connection</p>	
<p>Mounting Clips:Fixed tool</p>	
<p>Screws:Fixed tool</p>	

2)Optional Accessories:

<p>Interlink Cable:Allows fixtures to link together</p> <p>ILUL01AP-LNK-6-WH 6"White Cable ILUL01AP-LNK-12-WH 12"White Cable ILUL01AP-LNK-18-WH 18"White Cable ILUL01AP-LNK-72-WH 72"White Cable</p> <p>*More length can be customized</p>	
<p>Hardwire Connector : Hardwire connector for ULT501AP</p> <p>ILUL01AP-HWC-72-WH 72"White Cable</p> <p>*More length can be customized</p>	
<p>Power feed cable:AC direct plug-in cable</p> <p>ILUL01AP-PCA-72-WH 72"White Cable</p> <p>*More length can be customized</p>	



Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	SIZE / WATTS / LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILUCGUYA	10" - 4W / 500	3 - 3000K	W - WHITE	DM - 0-10V DIMMABLE
	16" - 5W / 600	4 - 4000K		IC - INTERLINK CABLE
	21" - 8W / 950	5 - 5000K		HW - HARDWIRE CONNECTOR
	26" - 9W / 1,100	6 - 6000K		PF - POWER FEED CABLE
	28" - 10W / 1,200			
	33" - 12W / 1,350			
	39" - 14W / 1,600			
	45" - 16W / 1,800			
	56.5" - 20W / 2,400			
	68.5" - 24W / 2,900			

SAMPLE ITEM NUMBER: ILUCGUYA 10 3 W DM

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120VAC
- **CRI:** >90
- **Operating Temperature:** -4°F ~ 104°F
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture is equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

