


BENSON SERIES RECESSED LINEAR

Description:


Our Benson Series Recessed Linear Light ensures an even illumination across any surface. Easily **LINKABLE** to create a seamless length. With an IP40 rating this fixture is perfect for offices, retail locations, or lobbies.

Features:

- Input Power: 100~277VAC
- Housing Material: Aluminum + PC cover
- Wattage: Various wattages see below.
- IP Rating: IP40
- CRI >90
- Available Color Options: 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Available Mounting Options: Recessed.
- L70 Lifetime: >50,000 hours.
- Available Finish Options: Silver, White, Black
- 0-10V dimming option available.
- Lighting controls option available.
- 7 Year Warranty.

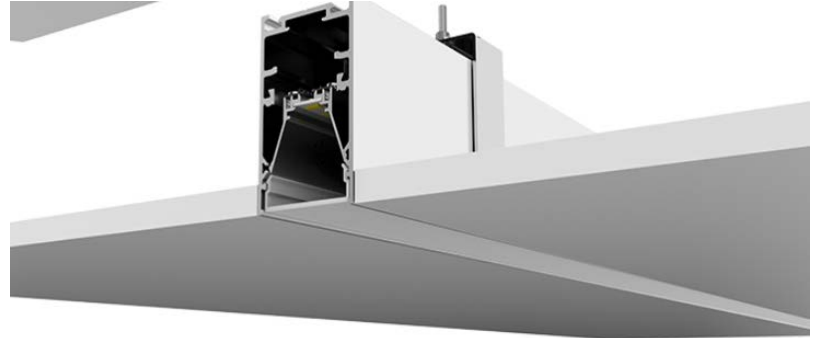

Custom Lengths Available.

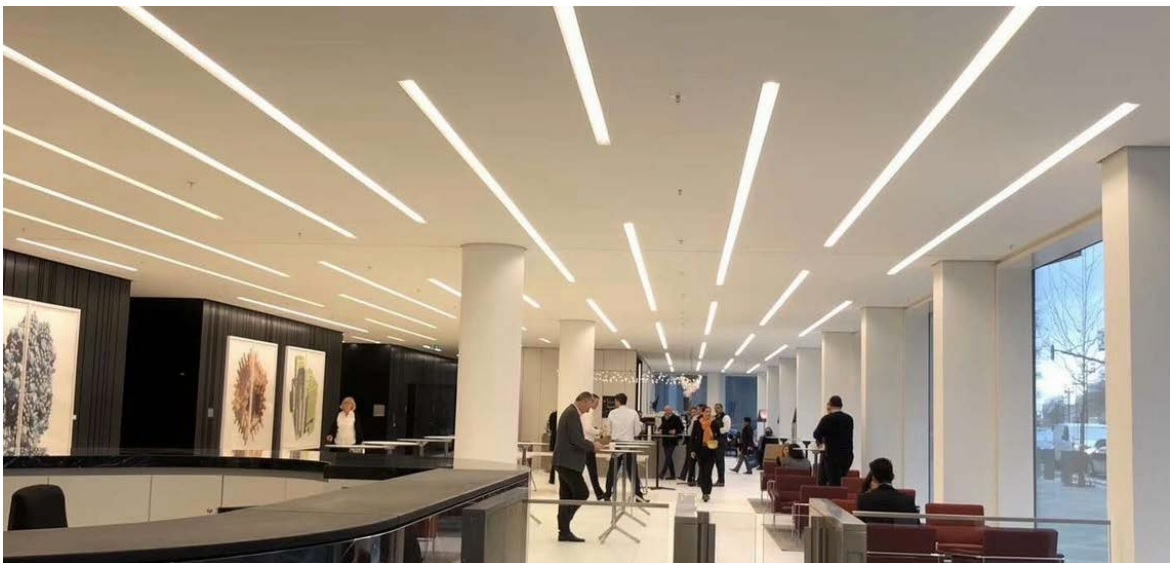


Step 1: Choose Your Channel.

Option 1:



- Power Consumption: 4 FT - 31W
8 FT - 62W
- Beam Angle: 96°
- Lumens: 100LM/W
750LM/FT
- Wattage: 7.8W/FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

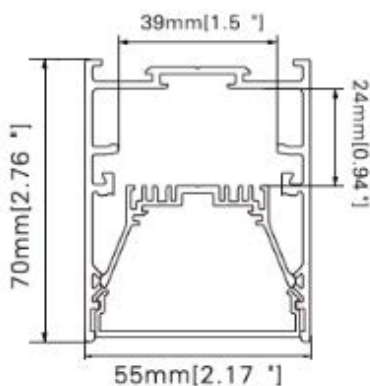


Option 2:



- Power Consumption: 4 FT - 34W
8 FT - 68W
- Beam Angle: 96°
- Lumens: 100LM/W
850LM/FT
- Wattage: 8.6W/FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

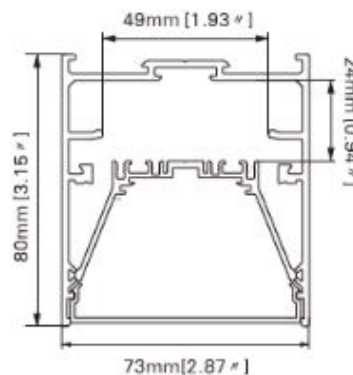


Option 3:



- Power Consumption: 4 FT - 45W
8 FT - 90W
- Beam Angle: 96°
- Lumens: 100LM/W
1,200LM/FT
- Wattage: 11.3W/FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

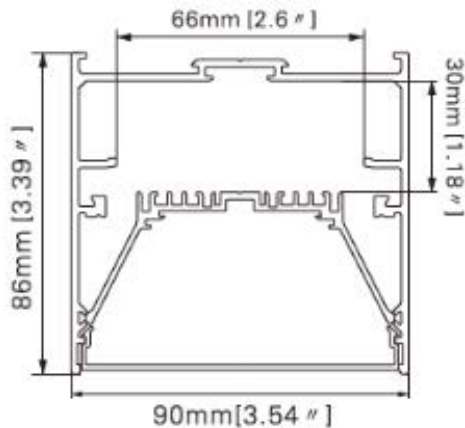


Option 4:



- Power Consumption: 4 FT - 23W
8 FT - 46W
- Beam Angle: 96°
- Lumens: 100LM/W
430LM/FT
- Wattage: 5.8W/FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

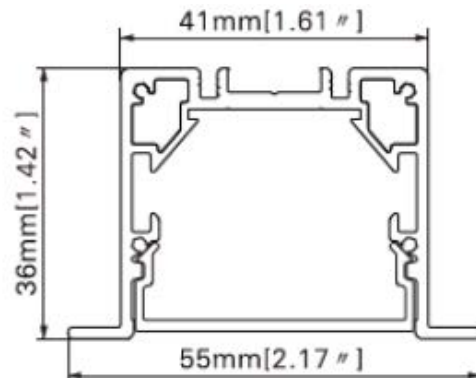


Option 5:



- Power Consumption: 4 FT - 32W
8 FT - 64W
- Beam Angle: 96°
- Lumens: 100LM/W
650 LM/FT
- Wattage: 8W/FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

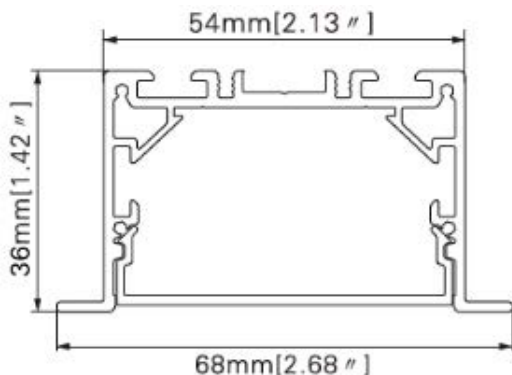


Option 6:



- Power Consumption: 4 FT - 34W
8 FT - 68W
- Beam Angle: 96°
- Lumens: 100LM/W
800 LM/FT
- Wattage: 8.5W/FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

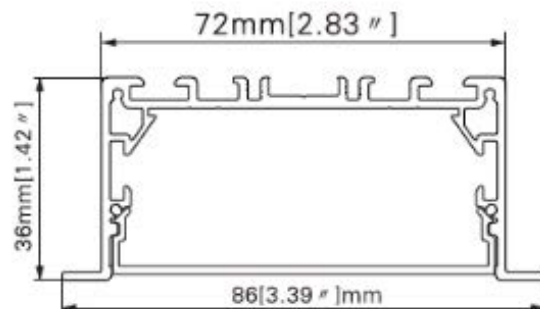

Ordering Key:

SERIES NUMBER	OPTION	SIZE	CCT	TRIM FINISH	ADDITIONAL OPTIONS
ILLBSBV	OP1 - OPTION 1	4FT - OPTION 1	27 - 2700K	S - SILVER	DM - 0-10V DIMMING
	OP2 - OPTION 2	8FT - OPTION 2	3 - 3000K	WH - WHITE	MS - MOTION SENSOR
	OP3 - OPTION 3	X - CUSTOM LENGTH	35 - 3500K	BL - BLACK	EM - EMERGENCY BACKUP
	OP4 - OPTION 4		4 - 4000K		TL - TRIMLESS
	OP5 - OPTION 5		5 - 5000K		
	OP6 - OPTION 6		6 - 6000K		

SAMPLE ITEM NUMBER: ILLBSBV OP1 X 4 S DM



Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture is equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Photometrics:

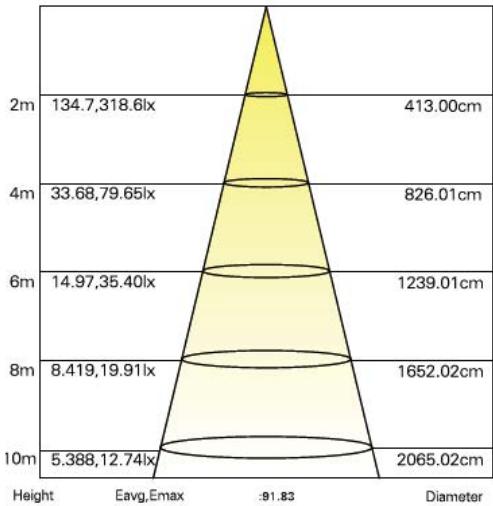

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

