



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

# King Wall Light



## Description:

Our King Wall Light is designed for any indoor or outdoor location with an IP65 rating. Easily wall mounted with CCT options ranging from 2700K - 6500K. Various dimming options Triac, Dali, 1-10V, PWM, or DMX512.

## Features:

- IP Rating; IP65, Waterproof.
- Shape: Square or circle.
- Lighting control options available.
- Dimmable
- Mounting: Wall mounted.
- Beam angles: 80°
- L70 Lifetime: 50,000 hours.
- CRI >90
- 24/12V DC, 240V/120V AC input voltage.
- 7 Year Warranty.
- Available colors: 2700K, 3000K, 4000K, 5000K, 6500K.
- Dimensions: 3.1IN x 2.17IN x 1.9IN

## Dimensions:

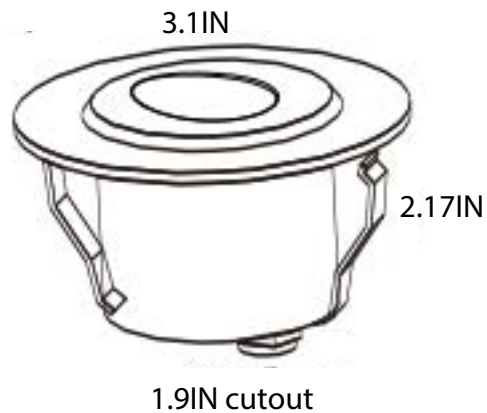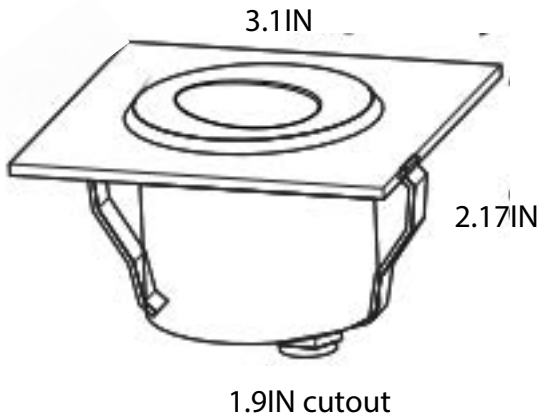

## Applications

- Outdoor
- Indoor
- Residential
- Public Spaces
- Retail
- Hallways



Date:	_____
Project:	_____
Price:	_____

## Ordering Key:

SERIES NUMBER	WATTS/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILUGKWBI	2.5W - 123	27K - 2700K	S - SILVER	DIM - DIMMABLE
	3W - 150	3K - 3000K	B- BLACK	C - CIRCLE
	4W - 200	4K - 4000K		SQ - SQUARE
		5K - 5000K		
		65K - 6500K		

SAMPLE ITEM NUMBER: ILUGKWBI 3W 5K B DIM

## Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 24/12V DC, 240V/120V AC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

## Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high luminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

