

Date:	_____
Project:	_____
Price:	_____

Apollo Wallwasher LED Downlights:


Description:

Our Apollo Wallwasher LED Downlights are an adjustable recessed module with variations in trims and reflectors. These downlights are a smart energy saving solution for offices, lobbies, residential and retail locations.




Module Options:

Option 1:

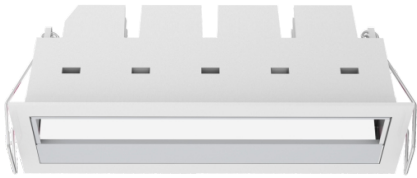

- Wattage/ Lumens: 11W / 850
- 8" [eZ: 4'SU] adl Z [fV]




- Size: 5IN
- Cutout:



5.7IN x 1.5IN

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

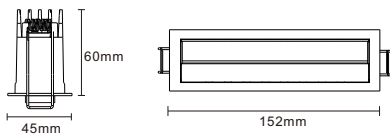

Option 2: Trimless



- Wattage/ Lumens: 11W / 500
- 8" [eZ: 4'SU] adl Z [fV]




- Size: 5IN
- Cutout:



5.9IN x 1.7IN

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

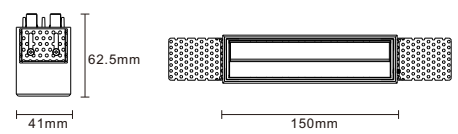


Date:	_____
Project:	_____
Price:	_____

Module Options:

Option 3:




- Wattage/ Lumens: 22W / 1,000
- 8' [eZ: 4'SU] adl Z [fVZ]




Option 4: Trimless




- Wattage/ Lumens: 22W / 1,000
- 8' [eZ: 4'SU] adl Z [fVZ]




- Size: 11IN
- Cutout: 
11.1IN x 1.5IN

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

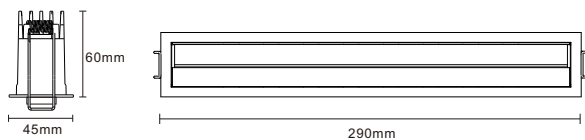

- Size: 11IN
- Cutout: 
11.4IN x 1.7IN

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

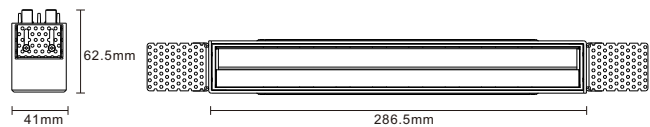

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

ILDRADEL

SERIES NUMBER	MODULE	CCT	FINISH	ADDITIONAL OPTIONS
ILDRADEL	11 - OPTION 1 11W	27K - 2700K	W - WHITE	DIM - 1-10V DIMMING
	112 - OPTION 2 11W	3K - 3000K	B - BLACK	
	223 - OPTION 3 22W	4K - 4000K		
	224 - OPTION 4 22W			

SAMPLE ITEM NUMBER: ILDRADEL 112 3K B DIM

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

Construction:

- **Construction:** Heatsink aluminum housing.
- **Finish:** Trim - Powder coated in white or black.
Reflectors- Powder coated inside in matte, white, gold or black.
- **Glare:** Unified glare rating (UGR) <19 making it easy on the eyes in offices or work settings.

