

Date:	_____
Project:	_____
Price:	_____

Prospect LED Downlights:


Description:

Our Prospect LED Downlights are a recessed module with variations in trim and trimless options. Offered with an array of reflectors and trim color options. These downlights are a smart energy saving solution for offices, lobbies, residential and retail locations.


Module Options:

Option 1:




- Wattage/ Lumens: 2W / 150LM
- Finish: Black or White.
- Size: 1.45IN
- Cutout: 
1.45IN x 1.45IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

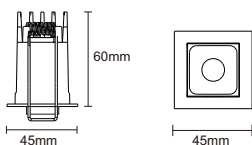


Option 2:




- Wattage/ Lumens: 9W / 650LM
- Finish: Black or White.
- Size: 2.55IN
- Cutout: 
2.55IN x 2.55IN

- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

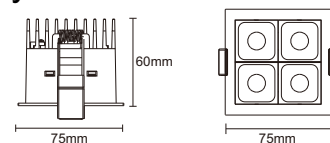


Date:	_____
Project:	_____
Price:	_____

Option 3:




- Wattage/ Lumens: 4W / 300LM
- Finish: Black or White.
- Size: 2IN
- Cutout: 
2.4IN x 1.5IN
- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

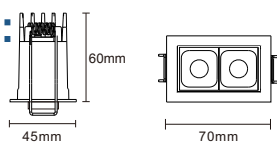

Option 4:




- Wattage/ Lumens: 7W / 500LM
- Finish: Black or White.
- Size: 3IN
- Cutout: 
3.5IN x 1.5IN
- Beam Angle: 24° or 40°
- Reflector:

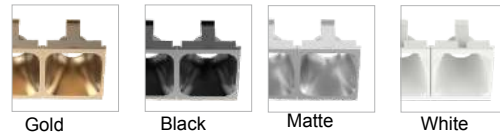


- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

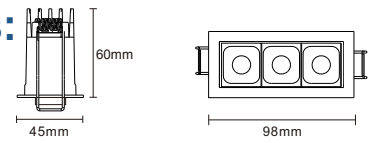


Date:	_____
Project:	_____
Price:	_____

Option 5: Trim

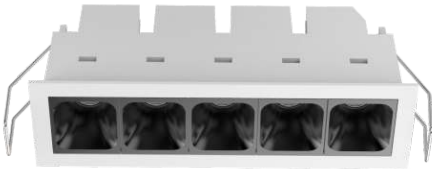

- Wattage/ Lumens: 11W / 800LM
- Finish: Black or White.
- Size: 5IN
- Cutout:




5.7IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

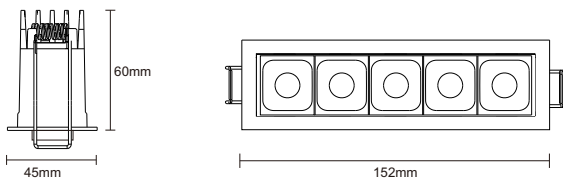

Option 6: Trimless



- Wattage/ Lumens: 11W / 800LM
- Finish: Black or White.
- Size: 6IN
- Cutout:




5.9IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

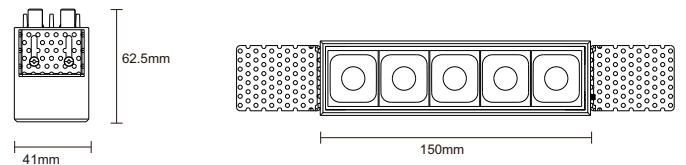

Date:	_____
Project:	_____
Price:	_____

Option 7: Trim




- Wattage/ Lumens: 22W / 1,600LM
- Finish: Black or White.
- Size: 11IN
- Cutout: 
11.1IN x 1.5IN
- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

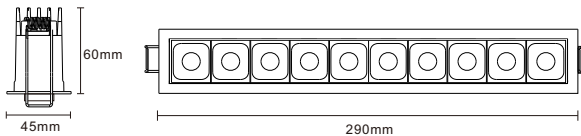

Option 8: Trimless




- Wattage/ Lumens: 22W / 1,600LM
- Finish: Black or White.
- Size: 11IN
- Cutout: 
11.4IN x 1.7IN
- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

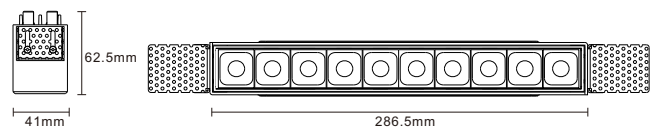


Date:	_____
Project:	_____
Price:	_____

Option 9: Fixed Trim



- Wattage/ Lumens: 9W / 600LM
- Finish: Black or White.

• Size: 5IN

• Cutout: 


5.7IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

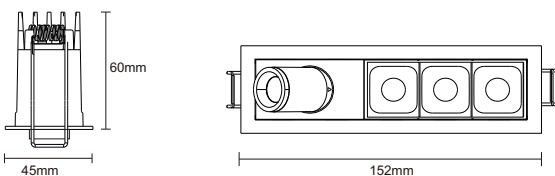


Option 10: Trimless



- Wattage/ Lumens: 9W / 600LM
- Finish: Black or White.

• Size: 6IN

• Cutout: 


5.9IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

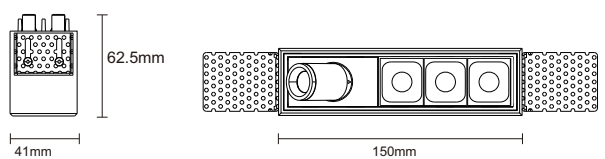

Date:	_____
Project:	_____
Price:	_____

Option 11: Fixed



- Wattage/ Lumens: 17W / 1,200LM
- Finish: Black or White.
- Size: 11IN
- Cutout:




11.1IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

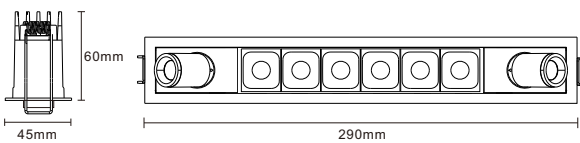

Option 12: Trimless



- Wattage/ Lumens: 17W / 1,200LM
- Finish: Black or White.
- Size: 11IN
- Cutout:




11.4IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

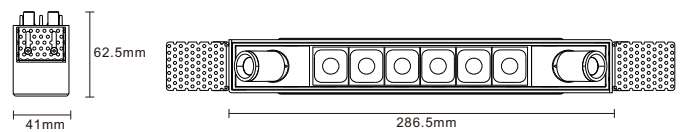

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

ILDLPREL

SERIES NUMBER	MODULE	WATTAGE	CCT	TRIM FINISH	REFLECTOR FINISH	BEAM ANGLE	ADDITIONAL OPTIONS
ILDLPREL	O1 - OPTION 1	2W - 2W	27K - 2700K	M - MATTE	M - MATTE	24 - 24°	ND - NON-DIMMING
	O2 - OPTION 2	4W - 4W	3K - 3000K	B - BLACK	B - BLACK	40 - 40°	DM - 1-10V DIMMING
	O3 - OPTION 3	7W - 7W	4K - 4000K	W - WHITE	W - WHITE		TD - TRIAC DIMMING
	O4 - OPTION 4	9W - 9W		G - GOLD	G - GOLD		DD - DALI DIMMING
	O5 - OPTION 5	11W - 11W					
	O6 - OPTION 6	17W - 17W					
	O7 - OPTION 7	22W - 22W					
	O8 - OPTION 8						
	O9 - OPTION 9						
	O10 - OPTION 10						
	O11 - OPTION 11						
	O12 - OPTION 12						

SAMPLE ITEM NUMBER: ILDLPREL 01 2W 27K M M 24 ND

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

Construction:

- **Construction:** Heatsink aluminum housing.
- **Finish:** Trim - Powder coated in white or black.
Reflectors- Powder coated inside in matte, white, gold or black.
- **Glare:** Unified glare rating (UGR) <19 making it easy on the eyes in offices or work settings.

