

Date:	_____
Project:	_____
Price:	_____

Prospect LED Downlights:

Description:

Our Prospect LED Downlights are a recessed module with variations in trim and trimless options. Offered with an array of reflectors and trim color options. These downlights are a smart energy saving solution for offices, lobbies, residential and retail locations.

Module Options:


Option 1:



- Wattage/ Lumens: 2W / 150
- Finish: Black or White.
- Size: 1.45IN
- Cutout:


1.45IN x 1.45IN

- Beam Angle: 24° or 40°
- Reflector:

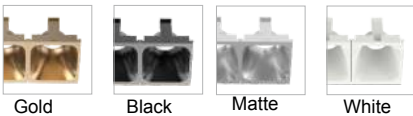

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

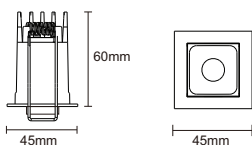


Option 2:



- Wattage/ Lumens: 9W / 700
- Finish: Black or White.
- Size: 2.55IN
- Cutout:


2.55IN x 2.55IN

- Beam Angle: 24° or 40°
- Reflector:

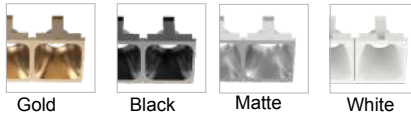

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

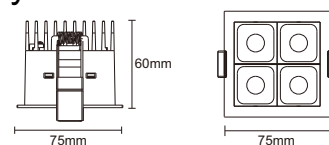


Date:	_____
Project:	_____
Price:	_____

Option 3:




- Wattage/ Lumens: 4W / 300
- Finish: Black or White.
- Size: 2IN
- Cutout: 
2.4IN x 1.5IN
- Beam Angle: 24° or 40°
- Reflector:

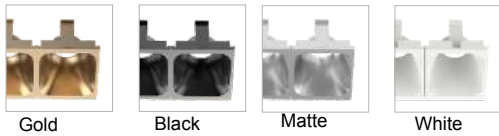


- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

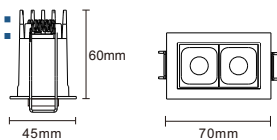

Option 4:




- Wattage/ Lumens: 7W / 650
- Finish: Black or White. Size: 3IN
- Cutout: 
3.5IN x 1.5IN
- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

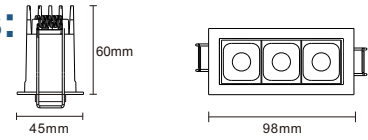


Date:	_____
Project:	_____
Price:	_____

Option 5: Trim



- Wattage/ Lumens: 11W / 800
- Dg gf : @_ai mpU f gc,
- Size: 5IN
- Cutout:




5.7IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

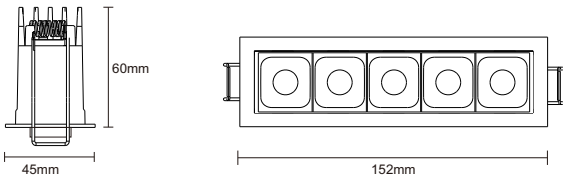

Option 6: Trimless




- Wattage/ Lumens: 11W / 8. 0
- Dg gf : @_ai mpU f gc,
- Size: 6IN
- Cutout:




5.9IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:

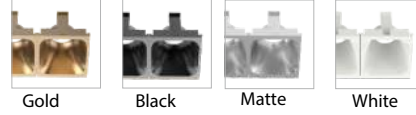

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

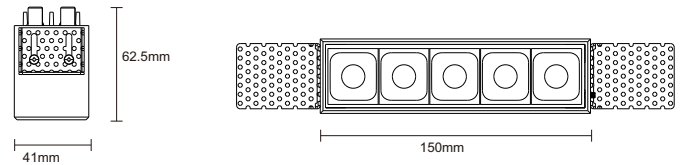


Date:	_____
Project:	_____
Price:	_____

Option 7: Trim



- Wattage/ Lumens: 22W / 1,700
- Degrade: @_ai mpU f gc,
- Size: 11IN
- Cutout:




11.1IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:



- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

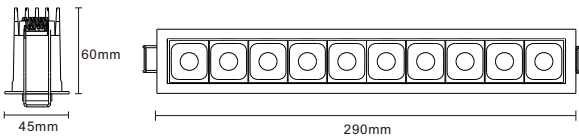

Option 8: Trimless




- Wattage/ Lumens: 22W / 1,700
- Degrade: @_ai mpU f gc,
- Size: 11IN
- Cutout:




11.4IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:

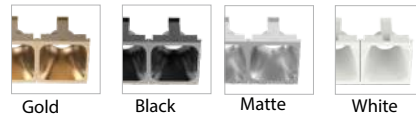


- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

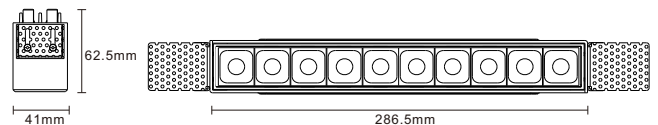


Date:	_____
Project:	_____
Price:	_____

Option 9: Fixed Trim



- Wattage/ Lumens: 9W / 650
- Design: @_ai mpU f gc,
- Size: 5IN
- Cutout:




5.7IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

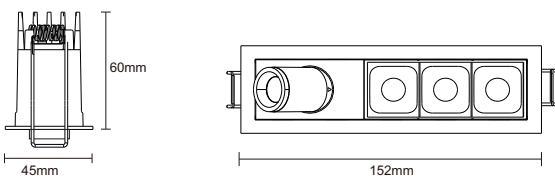

Option 10: Trimless



- Wattage/ Lumens: 9W / 650
- Design: @_ai mpU f gc,
- Size: 6IN
- Cutout:




5.9IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI > 90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

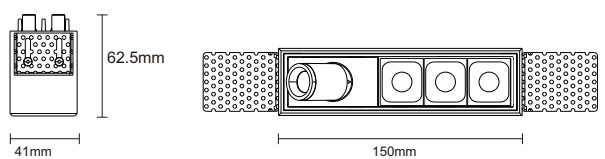

Date:	_____
Project:	_____
Price:	_____

Option 11: Fixed



- Wattage/ Lumens: 17W / 1,200
- Finish: Black or White.
- Size: 11IN
- Cutout:




11.1IN x 1.5IN

- Beam Angle: 24° or 40°
- Reflector:




- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.


Dimensions:

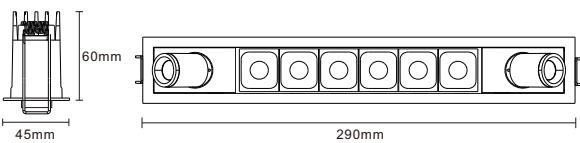

Option 12: Trimless




- Wattage/ Lumens: 17W / 1,200
- Finish: Black or White.
- Size: 11IN
- Cutout:




11.4IN x 1.7IN

- Beam Angle: 24° or 40°
- Reflector:

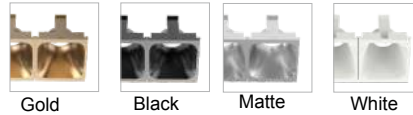

- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

Dimensions:

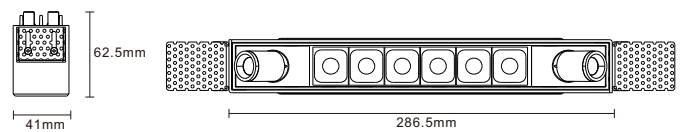

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

ILDRPDEL

SERIES NUMBER	MODULE	CCT	REFLECTOR	BEAM ANGLE	ADDITIONAL OPTIONS
ILDRPDEL	1 - OPTION 1 2W	27K - 2700K	M - MATTE	24 - 24°	ND - NON- DIMMING
	2 - OPTION 2 9W	3K - 3000K	B - BLACK	40 - 40°	DIM - 1-10V DIMMING
	4 - OPTION 3 4W	4K - 4000K	W - WHITE		PD - PHASE DIMMING
	7 - OPTION 4 7W		G - GOLD		DALI - DALI DIMMING
	113 - OPTION 5 11W				
	114 - OPTION 6 11W				
	225 - OPTION 7 22W				
	226 - OPTION 8 22W				
	97 - OPTION 9 9W				
	98 - OPTION 10 9W				
	179 - OPTION 11 17W				
	117 - OPTION 12 17W				
					FINISH
					BL - BLACK
					WH - WHITE

SAMPLE ITEM NUMBER: ILDRPDEL 113 3K B 40 DIM BL

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

Construction:

- **Construction:** Heatsink aluminum housing.
- **Finish:** Trim - Powder coated in white or black.
Reflectors- Powder coated inside in matte, white, gold or black.
- **Glare:** Unified glare rating (UGR) <19 making it easy on the eyes in offices or work settings.

