


Carlton LED Linear:

Description:


Our Carlton LED Linear has a variety of strip options. Each strip option fits comfortably in our Carlton Linear profile. This is ideal for offices, lobbies, residential and retail locations.

Step 1: Choose Strip

Option 1:

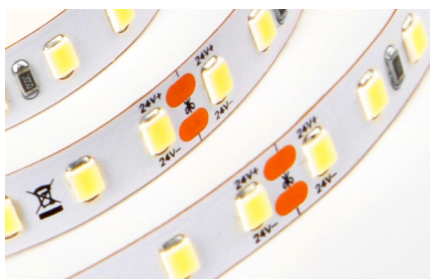

- Power: 4.4 W/FT
- Voltage: 24Vdc
- Lumens: 490 LM/FT or 115 LM/W
- Cutting: .164 FT/Unit
- Beam Angle: 120°
- IP Rating: IP20, IP55, IP66, IP67, or IP68
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, or 6000K.
- Dimming: Triac, 0-10V, or Smart.

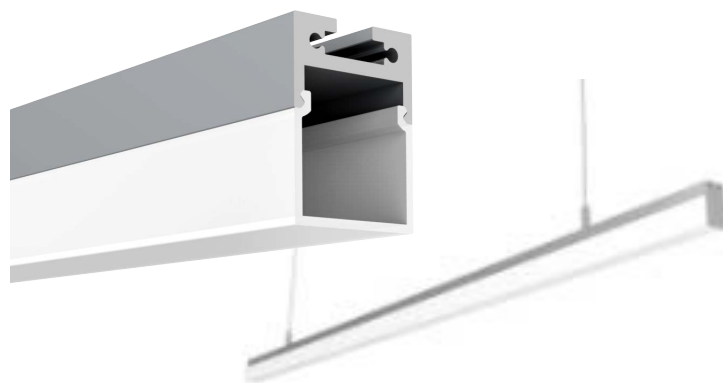

Compatible Additional Options:



SC1
Strip
Connector



SC2
Strip
Connector




SC3
Strip
Connector



SC4
Strip
Connector



SC5
Strip
Connector



SC6
Strip
Connector



SC7
Strip Connector
L-Shaped
T - Shaped
X - Shaped




SC8
Strip
Connector



SC9
Strip
Connector

Dimensions:

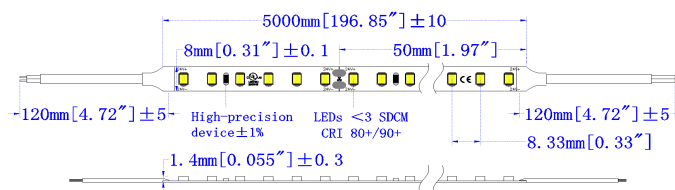

Step 1: Choose Strip

Option 2:




- Power: 4.4 W/FT
- Voltage: 24Vdc
- Lumens: 640 LM/FT or 155LM/W
- Cutting: .164 FT/Unit
- Beam Angle: 120°
- IP Rating: IP20, IP55, IP66, or IP67.
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, or 6000K.
- Dimming: Triac, 0-10V, or Smart.

Compatible Additional Options:



Dimensions:

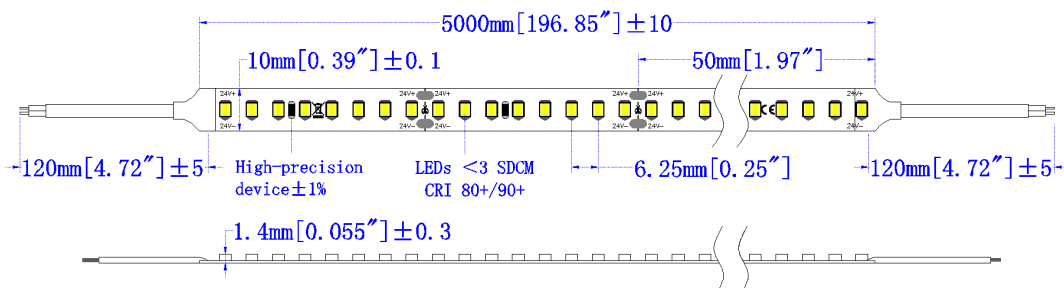

Strip Ordering Key:


ILLLCNBV

SERIES NUMBER	STRIP	LENGTH	CCT	IP RATING	DIMMING	CONNECTION
ILLLCNBV	1 - OPTION 1	X - CUSTOM LENGTH	27K - 2700K	IP20 - IP20	0DIM - 0-10V DIMMING	SC1 - SC1
	2 - OPTION 2	* PLEASE SPECIFY LENGTH IN INCHES	3K - 3000K	IP55 - IP55	TDIM - TRIAC DIMMING	SC2 - SC2
			4K - 4000K	IP67 - IP66	SDIM - SMART DIMMING	SC3 - SC3
			6K - 6000K	IP67 - IP67	NDIM - NO DIMMING	SC4 - SC4
				IP68 - IP68		SC5 - SC5
						SC6 - SC6
						SC7L - SC7L
						SC7T - SC7T
						SC7X - SC7X
						SC8 - SC8
						SC9 - SC9



SAMPLE ITEM NUMBER: ILLLCNBV 2 48IN 3K IP55 TDIM



Linear Features:



Dimensions:

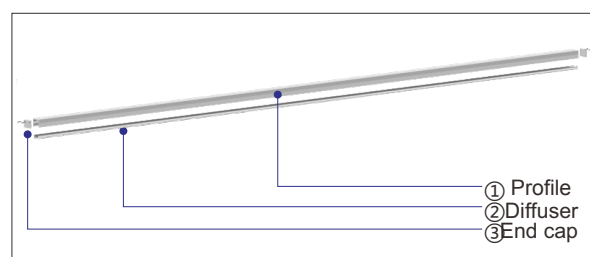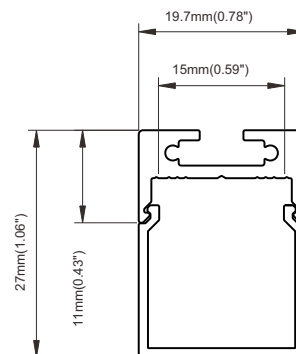

- Finish: Silver
- Mounting: Suspended or Surface Mount
- Construction: Aluminum end cap and profile.
- Diffuser: Frosted.
- Length: 4FT, 6FT, or 8FT

Additional Options:

Photo	Description	Model code
	Pendant Mount	PM
	6FT Suspension	6S

Photo	Description	Model code	Size(mm)
	Connection	CC0	50(L)*10(W)*2(H)
	12FT Suspension	12S	



Date: _____

Project: _____

Price: _____

Linear Ordering Key:

ILLLCNBV

SERIES NUMBER	LENGTH	FINISH	MOUNTING	ADDITIONAL OPTIONS
ILLLCNBV	X - CUSTOM LENGTH	BL - BLACK	SU - SUSPENDED	PM - PENDANT MOUNT
	* PLEASE SPECIFY LENGTH IN INCHES	S - SILVER	SM - SURFACE	6S - 6FT SUSPENSION CORD
		WH - WHITE		12S - 12FT SUSPENSION CORD
				SM - SURFACE MOUNT
				CC0 - CONNECTION

SAMPLE ITEM NUMBER: ILLLCNBV 48IN S SM SM

