

|          |       |
|----------|-------|
| Date:    | _____ |
| Project: | _____ |
| Price:   | _____ |

## Carlton LED Linear:

### Description:

Our Carlton LED Linear has a variety of strip options. Each strip option fits comfortably in our Carlton Linear profile. This is ideal for offices, lobbies, residential and retail locations.

### Step 1: Choose Strip

#### Option 3:



- Power: 4.4 W/FT
- Voltage: 24Vdc
- Lumens: 640 LM/FT or 155LM/W
- Cutting: .164 FT/Unit
- Beam Angle: 120°
- IP Rating: IP20, IP55, IP66, or IP67.
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, or 6000K.
- Dimming: Triac, 0-10V, or Smart.



### Compatible Additional Options:



SC1  
Strip  
Connector



SC2  
Strip  
Connector




SC3  
Strip  
Connector



SC4  
Strip Connector  
Compatible with SC3

### Dimensions:

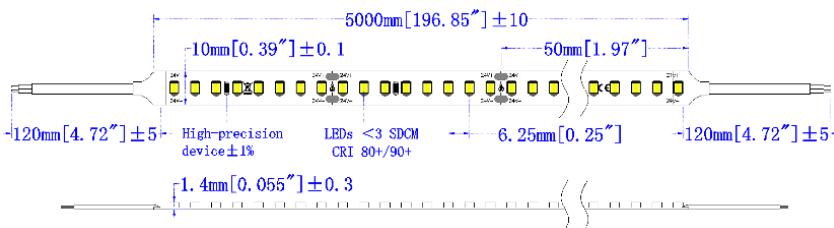

|          |       |
|----------|-------|
| Date:    | _____ |
| Project: | _____ |
| Price:   | _____ |

## Step 1: Choose Strip

### Option 4:



- Power: 6.16 W/FT
- Voltage: 24Vdc
- Lumens: 790 LM/FT or 135LM/W
- Cutting: .234 FT/Unit
- Beam Angle: 120°
- IP Rating: IP20, IP55, IP66, or IP67.
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, or 6000K.
- Dimming: Triac, 0-10V, or Smart.

### Compatible Additional Options:




SC1  
Strip  
Connector



SC2  
Strip  
Connector




SC3  
Strip  
Connector



SC4  
Strip Connector  
Compatible with SC3

### Dimensions:

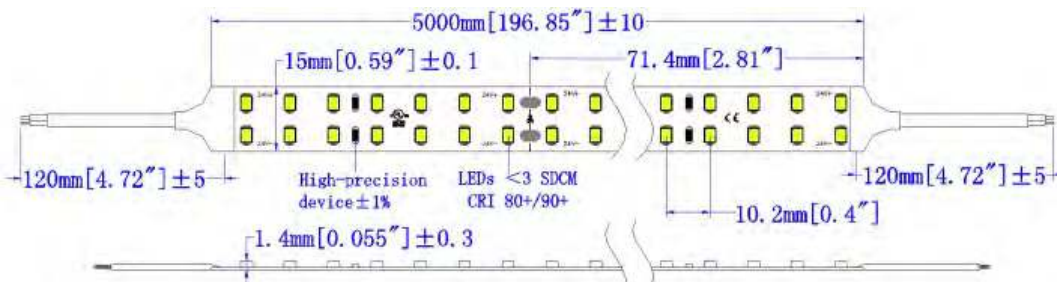

|          |       |
|----------|-------|
| Date:    | _____ |
| Project: | _____ |
| Price:   | _____ |

## Strip Ordering Key:

ILCVCNBVS

| SERIES NUMBER | STRIP        | LENGTH                            | CCT          | IP RATING   | DIMMING             | CONNECTION  |
|---------------|--------------|-----------------------------------|--------------|-------------|---------------------|-------------|
| ILCVCNBVS     | 3 - OPTION 3 | X - CUSTOM LENGTH                 | 27K - 2700K  | IP20 - IP20 | DM - 0-10V DIMMING  | SC1 - SC1   |
|               | 4 - OPTION 4 | * PLEASE SPECIFY LENGTH IN INCHES | 3K - 3000K   | IP55 - IP55 | TDM - TRIAC DIMMING | SC2 - SC2   |
|               |              |                                   | 35K - 3500K  | IP67 - IP66 | SDM - SMART DIMMING | SC3 - SC3   |
|               |              |                                   | 4K - 4000K   | IP67 - IP67 | NDM - NO DIMMING    | SC4 - SC4   |
|               |              |                                   | 6K - 6000K   | IP68 - IP68 |                     | SC5 - SC5   |
|               |              |                                   | RGBW - RGBW* |             |                     | SC6 - SC6   |
|               |              |                                   |              |             |                     | SC7L - SC7L |
|               |              |                                   |              |             |                     | SC7T - SC7T |
|               |              |                                   |              |             |                     | SC7X - SC7X |
|               |              |                                   |              |             |                     | SC8 - SC8   |
|               |              |                                   |              | SC9 - SC9   |                     |             |

SAMPLE ITEM NUMBER: ILCVCNBVS 2 48IN 3K IP55 TDM

\* RGBW only available for option 5




|          |       |
|----------|-------|
| Date:    | _____ |
| Project: | _____ |
| Price:   | _____ |

### Linear Features:




### Dimensions:

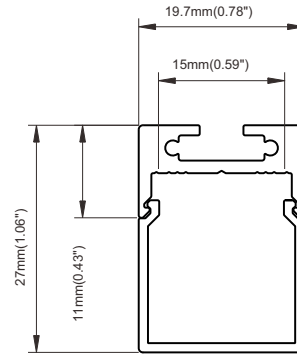


### Opal Lens:






- Finish: Silver
- Mounting: Suspended or Surface Mount

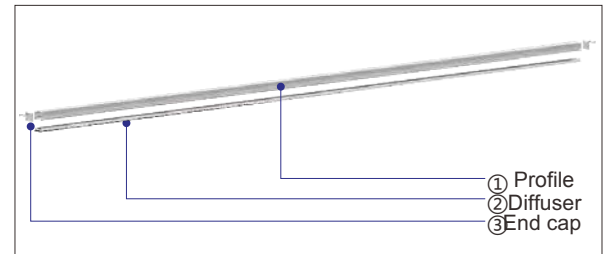

- Construction: Aluminum end cap and profile.
- Diffuser: Frosted.
- Length: 4FT, 6FT, or 8FT



### Mounting Options:

| Photo   | Description    | Model code | Photo   | Description     | Model code | Size(mm) |
|---|----------------|------------|---|-----------------|------------|----------|
|   | Pendant Mount  | PM         |  | 12FT Suspension | 12S        |          |
|  | 6FT Suspension | 6S         |   |                 |            |          |






**i-LUMINOSITY**  
LED LIGHTING FIXTURES

|          |       |
|----------|-------|
| Date:    | _____ |
| Project: | _____ |
| Price:   | _____ |

### Connection Options:

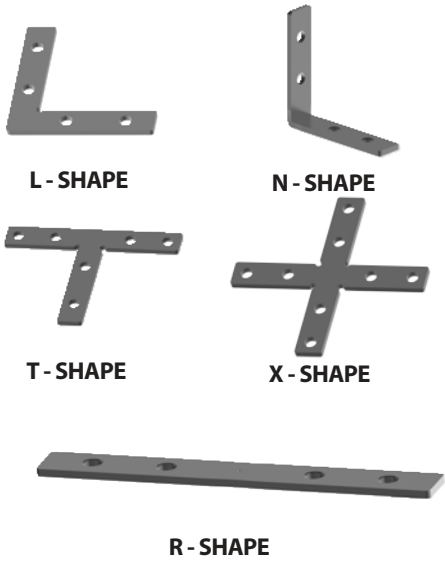

### Linear Ordering Key:

ILCVCNBVPO6

| SERIES NUMBER | LENGTH                            | FINISH             | MOUNTING              | ADDITIONAL OPTIONS                |
|---------------|-----------------------------------|--------------------|-----------------------|-----------------------------------|
| ILCVCNBVPO6   | X - CUSTOM LENGTH                 | <b>Bk</b> - BLACK  | <b>SU</b> - SUSPENDED | <b>PM</b> - PENDANT MOUNT         |
|               | * PLEASE SPECIFY LENGTH IN INCHES | <b>SV</b> - SILVER | <b>SM</b> - SURFACE   | <b>6S</b> - 6FT SUSPENSION CORD   |
|               |                                   | <b>WH</b> - WHITE  | <b>W</b> - WALL       | <b>12S</b> - 12FT SUSPENSION CORD |
|               |                                   |                    | <b>P</b> - PENDANT    | <b>WM</b> - WALL MOUNT            |
|               |                                   |                    | <b>R</b> - RECESSED   | <b>SM</b> - SURFACE MOUNT         |
|               |                                   |                    |                       | <b>CCO</b> - CONNECTION           |
|               |                                   |                    |                       |                                   |
|               |                                   |                    |                       |                                   |
|               |                                   |                    |                       |                                   |
|               |                                   |                    |                       |                                   |

SAMPLE ITEM NUMBER: ILCVCNBVPO6 2 48IN 3K IP55 TDIM

