

LED Haring Shop Light:

Description:

The LED Haring Shop Light is designed for residential or commercial applications. This fixture is equipped with a polycarbonate lens that provides an even uniform light distribution. The Haring Shop Light is ETL listed for damp locations.

Features:


- Mounting options: Suspended
 - Five-foot AC power cord is standard. (Connects up to eight fixtures.)
 - Mounts using standard, 3-foot chains.
 - On/off pull-chain (18" long) is standard.
 - 140 LM/W
- L70 Lifetime: >54,000 hours
- CRI >90
- CCT: 4000K.
- ETL Listed: Damp locations.
- Operating temperature: -4°F ~ 104°F
- 120 AC voltage (50-60Hz)
- 7 Year Warranty.



Applications:

- Retail
- Commercial
- Back of House
- Residential

Dimensions:

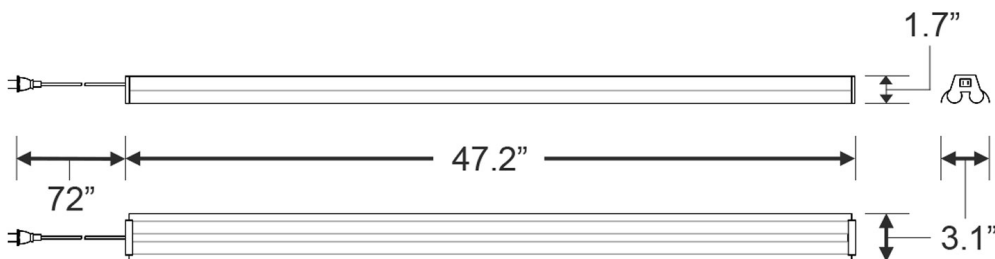

Ordering Key:

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILLNHSCL	40W - 48IN / 4,200	4 - 4000K	WH - WHITE	

SAMPLE ITEM NUMBER: ILLNHSCL 40W 4 WH


Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 120 AC V (50-60Hz)
- **Operating Temperature:** -4°F ~ 104°F
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

Photometrics:

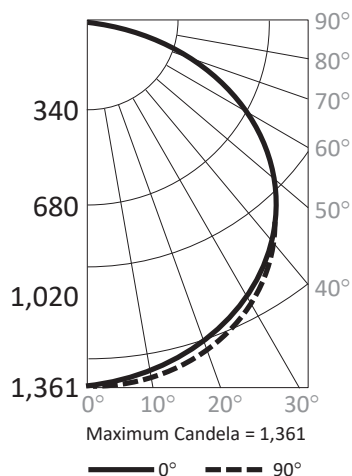

Candlepower Summary

	0°	90°
0°	1,361	1,361
10°	1,301	1,333
20°	1,194	1,273
30°	1,052	1,194
40°	887	1,094
50°	712	940
60°	531	713
70°	351	435
80°	192	133
90°	68	1

Zonal Lumen Summary

Zone	Lumens	% Fixture
0° – 10°	128	3.0%
0° – 20°	495	11.8%
0° – 30°	1,055	25.1%
0° – 40°	1,743	41.5%
0° – 50°	2,477	58.9%
0° – 60°	3,167	75.3%
0° – 70°	3,721	88.5%
0° – 80°	4,071	96.9%
0° – 90°	4,188	99.6%
90° – 180°	15	0.4%
0° – 180°	4,203	100.0%

Cone of Light

