



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____


LED Rogers Panel Light

Description:

Our LED Rogers Panel Light ensures an even illumination across any surface. Our panels are available in various trim options from black to bronze or even silver. These panels can be easily surface mounted or pendant mounted to enhance any application.

Features:

- Input Power: AC 120V, 50/60 Hz
- Construction: Aluminum body.
- Wattage: 30W
- CRI >90
- CCT: 3000K, 4000K & 5000K.
- Mounting: Surface or pendant mounted.
- L70 Lifetime: >50,000 hours.
- Available Finish Options: Black, White, or Bronze.
- Beam Angle: 120°
- Triac dimming option available.
- Lighting controls option available.
- 7 Year Warranty.
- Dimensions: 16IN x .98IN

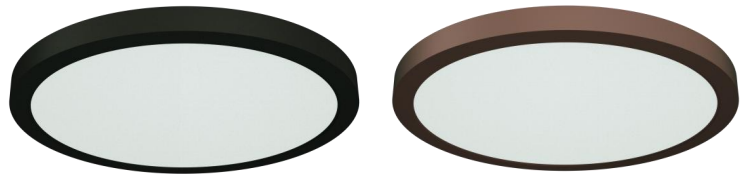

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	LUMENS/ WATTS/ SIZE/	CCT	FINISH	ADDITIONAL OPTIONS
ILPNLRPHO	3000 - 30w / 16 IN	3 - 3000K	WH - WHITE	DM - TRIAC DIMMING
		4 - 4000K	BL - BLACK	PD - PENDANT KIT
		5 - 5000K	BR - BRONZE	

SAMPLE ITEM NUMBER: ILPNLRPHO3000 4 BL PD

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:

- This LED fixture is equipped with Triac dimming that works universally with any standard Triac control or dimmer.

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

Installation:

- Standard installation is surfaced mounting by rotatable brackets. Pendant kits can be chosen as an additional option in the ordering key.

