


IP66 PERRY LINEAR FIXTURE

Our IP66 Perry Linear Fixture is available in a 4FT or 8FT option. This fixture can be ceiling mounted or it can be pendant mounted. This product is perfect for back of house, awnings, patios, exterior walkways, and many other outdoor applications.

Features

- Linkable, ladder structure design.
- Input Voltage: 100-277V AC
- Lumen Output: 110LM/W
- 0-10V dimmable option available.
- Lighting control options available.
- Mounting options: Ceiling or pendant mount
- Construction: Aluminum housing.
- Finish: White, Silver, Black.
- Operating Temperature: -22°F ~ 111°F
- Beam Angle: 106°
- CRI >90
- IP Rating: IP66, IK10
- L70 Lifetime: >50,000 hours
- CCT: 3000K, 3500K, 4000K, 5000K, 6000K.
- Wattage options: 45W or 90W
- Available Lengths: 4 ft or 8 ft
- 7 Year Warranty

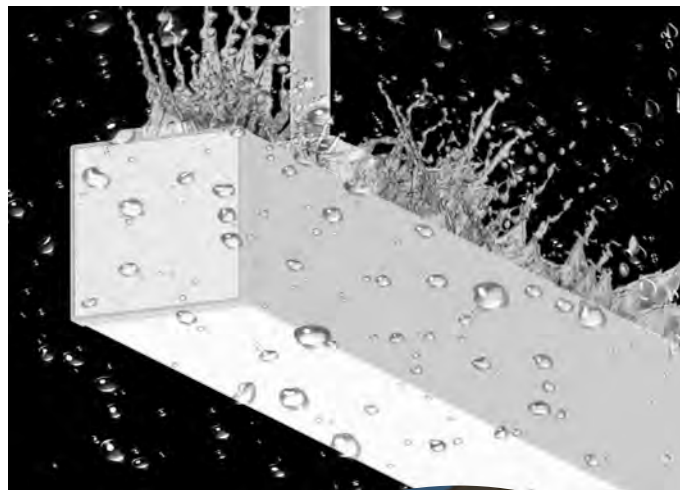

Ordering Key:

ILLPLBV				
SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILLPLBV	45W - 4 FT. / 5,150	3K - 3000K	S - SILVER	DM - 0-10V DIMMING
	90W - 8 FT. / 10,300	35K - 3500K	W - WHITE	PT - PENDANT MOUNT
		4K - 4000K	B - BLACK	SM - CEILING MOUNT
		5K - 5000K		
		6K - 6000K		

SAMPLE ITEM NUMBER: ILLPLBV 45 4K W DM PT

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277V AC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Controls:



- This LED fixture can be equipped with 0-10V dimming that works universally with any standard 0-10V control or dimmer.

Optical System:



- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

Dimensions:

4FT:




8FT:



Date:	_____
Project:	_____
Price:	_____

OPTIONAL ACCESSORIES:

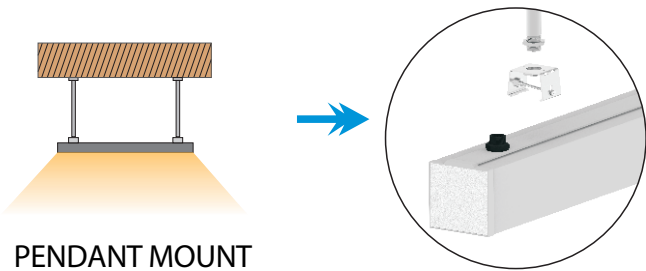


PENDANT MOUNT



ITEM #: PT



AC IN LINE

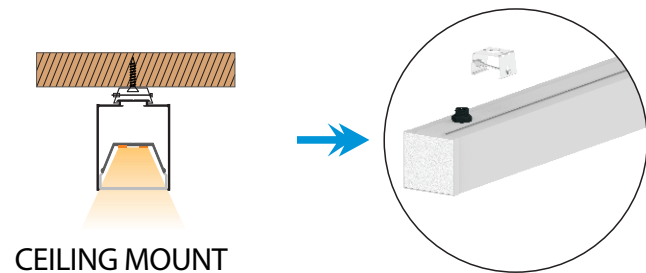

CEILING MOUNT



ITEM #: SM



AC IN LINE




CONNECTION



ITEM #: SC



ELECTRICAL
CONNECTION CABLE

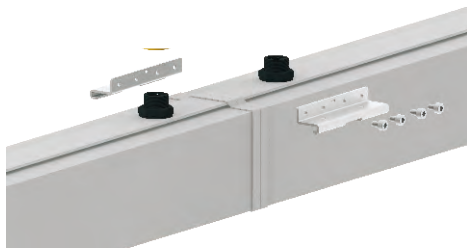

TOOL





ITEM #: TL



PHOTOMETRICS:

4FT:

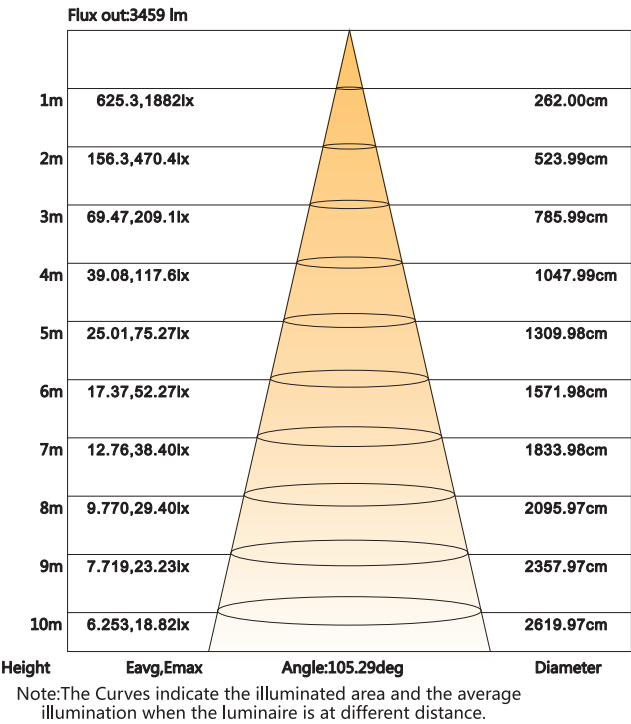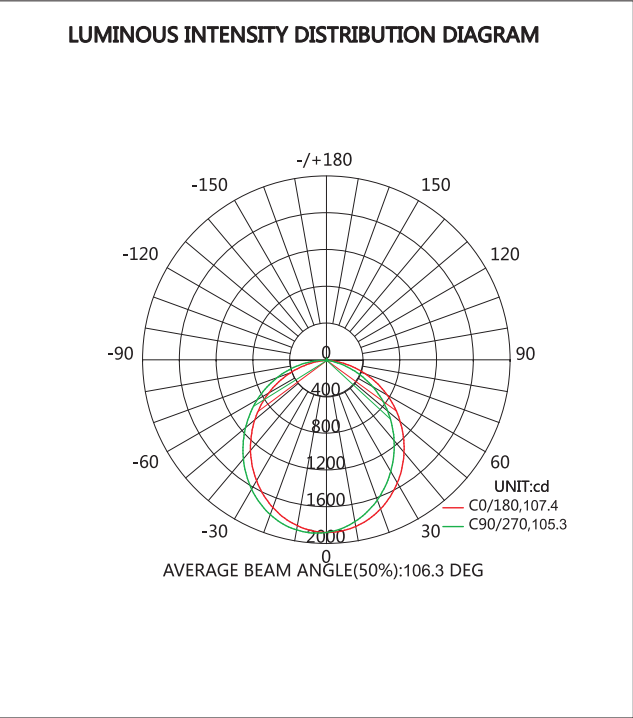

PHOTOMETRICS:

8FT:

