


## Kips Back Lit LED Panel

### Description:


Our Kips Back Lit LED Panel is a highly versatile fixture designed to alter the look and feel of any room with the flick of a switch. Choose between an adjustable wattage, adjustable CCT, a combination of the 2, or a 1-10V dimming option. Available in 2x2, 2x4 and 1x4 ideal for general lighting applications such as open offices, schools, and retail locations.

### Features:

- Wattage Adjustable Type: 26W-32W-40W or 32W-40W-50W.
- CCT Adjustable: 3500k, 4000k, 5000k.
- General 1-10V Dimming Type: CCT available in 3500K, 4000K, and 5000K.
- Voltage: 100-120V
- Beam Angle: 120°
- Junction box is attached to the side of the panel.
- Construction: Cold-rolled steel SPCC back and aluminum frame.
- CRI >90
- Mounting: Suitable for recessed-mount and cable-mount. Fits standard T-bar and narrow grid drop ceilings.
- IP20, suitable for indoor applications.
- L70 Lifetime: >50,000 hours.
- 7 Year Warranty.

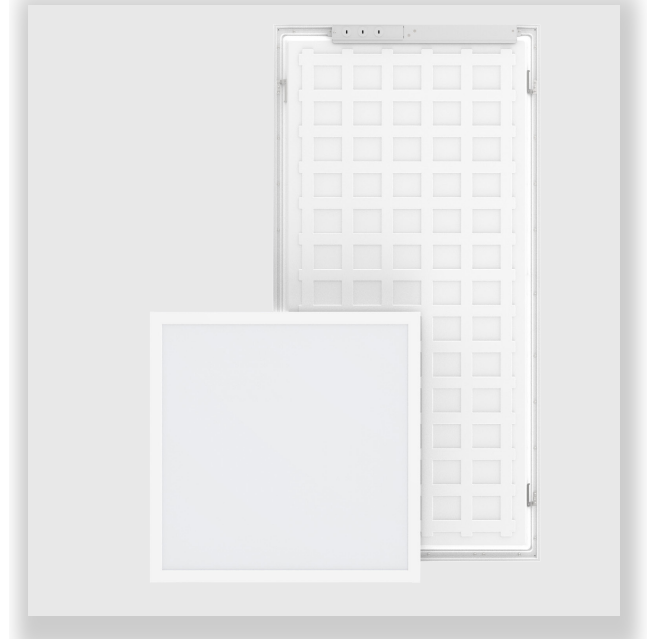

## Explosion Diagram:

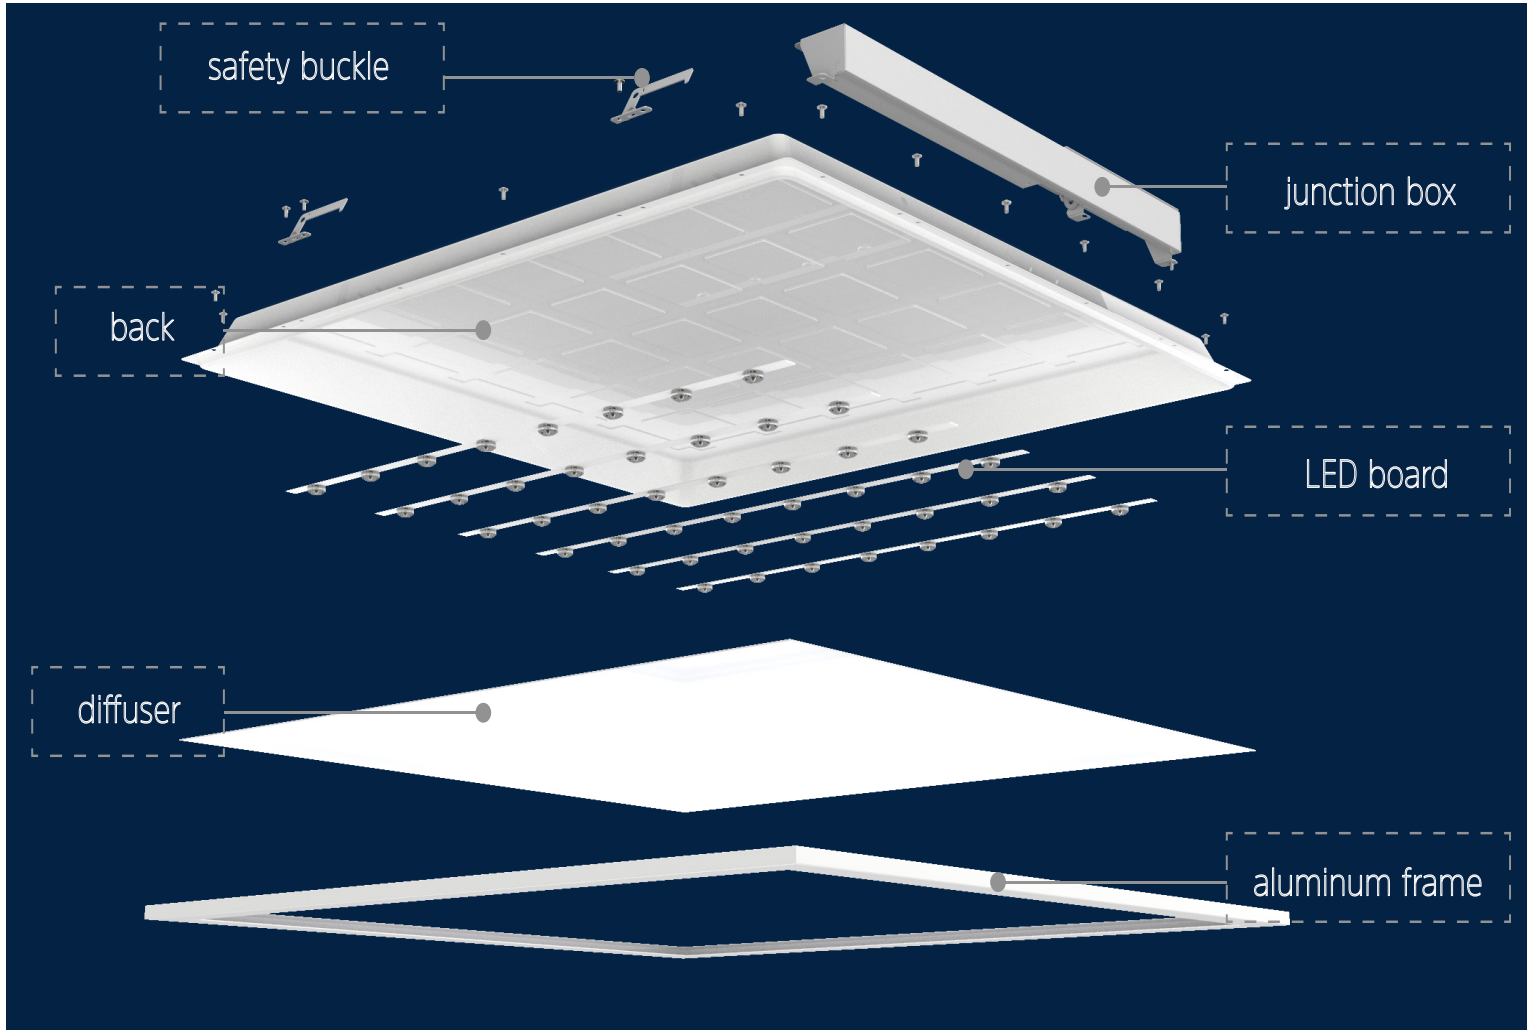

## Ordering Key:

**Series Item Number: ILPNLKPTB**

### 1-10V Dimming Options:

| Model No.         | Power | Lumens | Efficacy | Output Voltage | CCT Range                                                            | Dimensions    |
|-------------------|-------|--------|----------|----------------|----------------------------------------------------------------------|---------------|
| <b>Option110V</b> | 26W   | 3250lm | 125Lm/W  | 36V            | <b>35K - 3500K</b><br><br><b>4K - 4000K</b><br><br><b>5K - 5000K</b> | 303*1213*35mm |
| <b>Option210V</b> | 32W   | 4000lm | 125Lm/W  | 36V            |                                                                      | 303*1213*35mm |
| <b>Option310V</b> | 40W   | 5000lm | 125Lm/W  | 36V            |                                                                      | 303*1213*35mm |
| <b>Option410V</b> | 26W   | 3250lm | 125Lm/W  | 36V            |                                                                      | 603*603*35mm  |
| <b>Option510V</b> | 32W   | 4000lm | 125Lm/W  | 36V            |                                                                      | 603*603*35mm  |
| <b>Option610V</b> | 40W   | 5000lm | 125Lm/W  | 36V            |                                                                      | 603*603*35mm  |
| <b>Option710V</b> | 32W   | 4000lm | 125Lm/W  | 36V            |                                                                      | 603*1213*35mm |
| <b>Option810V</b> | 40W   | 5000lm | 125Lm/W  | 36V            |                                                                      | 603*1213*35mm |
| <b>Option910V</b> | 50W   | 6250lm | 125Lm/W  | 36V            |                                                                      | 603*1213*35mm |

SAMPLE ITEM NUMBER: Option110V - 3K

### Wattage Adjustable & CCT Adjustable Options:

| Model No.         | Power     | Lumens           | Efficacy | Output Voltage | CCT Range       | Dimension     |
|-------------------|-----------|------------------|----------|----------------|-----------------|---------------|
| <b>Option1CAT</b> | 26-32-40W | 3250-4000-5000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 303*1213*35mm |
| <b>Option2CAT</b> | 26-32-40W | 3250-4000-5000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*603*35mm  |
| <b>Option3CAT</b> | 32-40-50W | 4000-5000-6250lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*1213*35mm |

SAMPLE ITEM NUMBER: Option1CAT



#### Wattage Adjustable Options:

| Model No.         | Power     | Lumens           | Efficacy | Output Voltage | CCT Range                                                    | Dimension     |
|-------------------|-----------|------------------|----------|----------------|--------------------------------------------------------------|---------------|
| <b>Option1WAO</b> | 26-32-40W | 3250-4000-5000lm | 125Lm/W  | 36V            | <b>35K</b> - 3500K<br><b>4K</b> - 4000K<br><b>5K</b> - 5000K | 303*1213*35mm |
| <b>Option2WAO</b> | 26-32-40W | 3250-4000-5000lm | 125Lm/W  | 36V            |                                                              | 603*603*35mm  |
| <b>Option3WAO</b> | 32-40-50W | 4000-5000-6250lm | 125Lm/W  | 36V            |                                                              | 603*1213*35mm |

SAMPLE ITEM NUMBER: Option1CAT- 35K


#### CCT Adjustable Options:

| Model No.          | Power | Lumens | Efficacy | Output Voltage | CCT Range       | Dimension     |
|--------------------|-------|--------|----------|----------------|-----------------|---------------|
| <b>Option1CCTA</b> | 26W   | 3250lm | 125Lm/W  | 36V            | 3500-4000-5000K | 303*1213*35mm |
| <b>Option2CCTA</b> | 32W   | 4000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 303*1213*35mm |
| <b>Option3CCTA</b> | 40W   | 5000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 303*1213*35mm |
| <b>Option4CCTA</b> | 26W   | 3250lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*603*35mm  |
| <b>Option5CCTA</b> | 32W   | 4000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*603*35mm  |
| <b>Option6CCTA</b> | 40W   | 5000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*603*35mm  |
| <b>Option7CCTA</b> | 32W   | 4000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*1213*35mm |
| <b>Option8CCTA</b> | 40W   | 5000lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*1213*35mm |
| <b>Option9CCTA</b> | 50W   | 6250lm | 125Lm/W  | 36V            | 3500-4000-5000K | 603*1213*35mm |


SAMPLE ITEM NUMBER: Option1CCTA




## Product Dimensions:

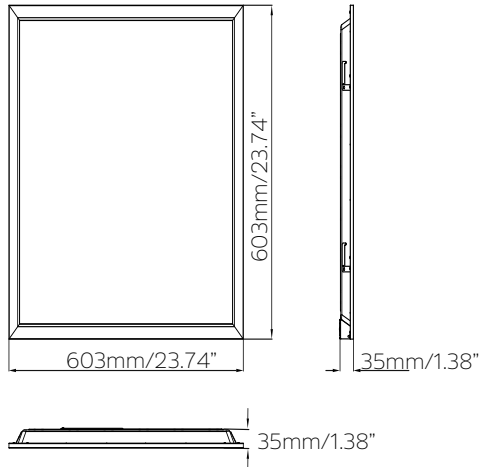

**2 x 2 FT**

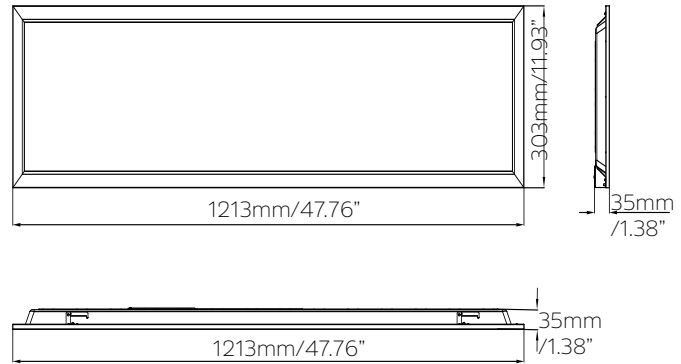

**1 x 4 FT**

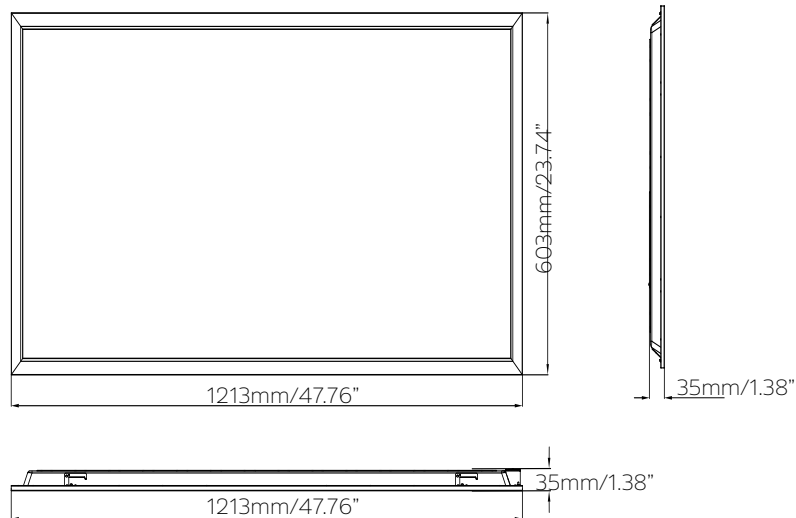

**2 x 4 FT**

