


Kips Backlit LED Panel

Description:


Our Kips Backlit LED Panel is a highly versatile fixture designed to alter the look and feel of any room with the flick of a switch. Choose between an adjustable wattage, adjustable CCT, a combination of the two, or a 1-10V dimming option. Available in 2x2, 2x4 and 1x4 ideal for general lighting applications such as open offices, schools, and retail locations.

Features:

- Wattage Adjustable Type: 26W-32W-40W or 32W-40W-50W.
- CCT Adjustable: 3500K, 4000K, 5000K.
- General 1-10V Dimming Type.
- Lumens: 125 LM/W
- Voltage: 100-277V
- Beam Angle: 120°
- Junction box is attached to the side of the panel.
- Construction: Cold-rolled steel SPCC back and aluminum frame.
- CRI >90
- Mounting: Suitable for recessed-mount and cable-mount. Fits standard T-bar and narrow grid drop ceilings.
- Suitable for indoor applications.
- L70 Lifetime: >50,000 hours.
- 7 Year Warranty.

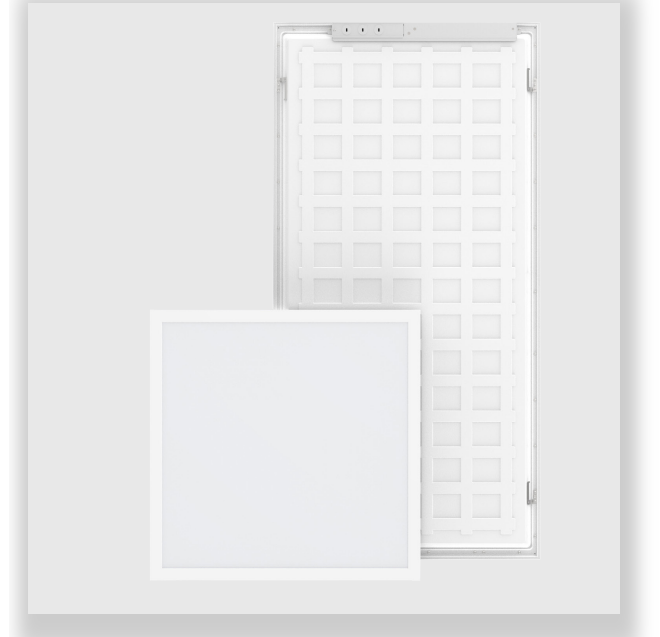

LED Panel Diagram

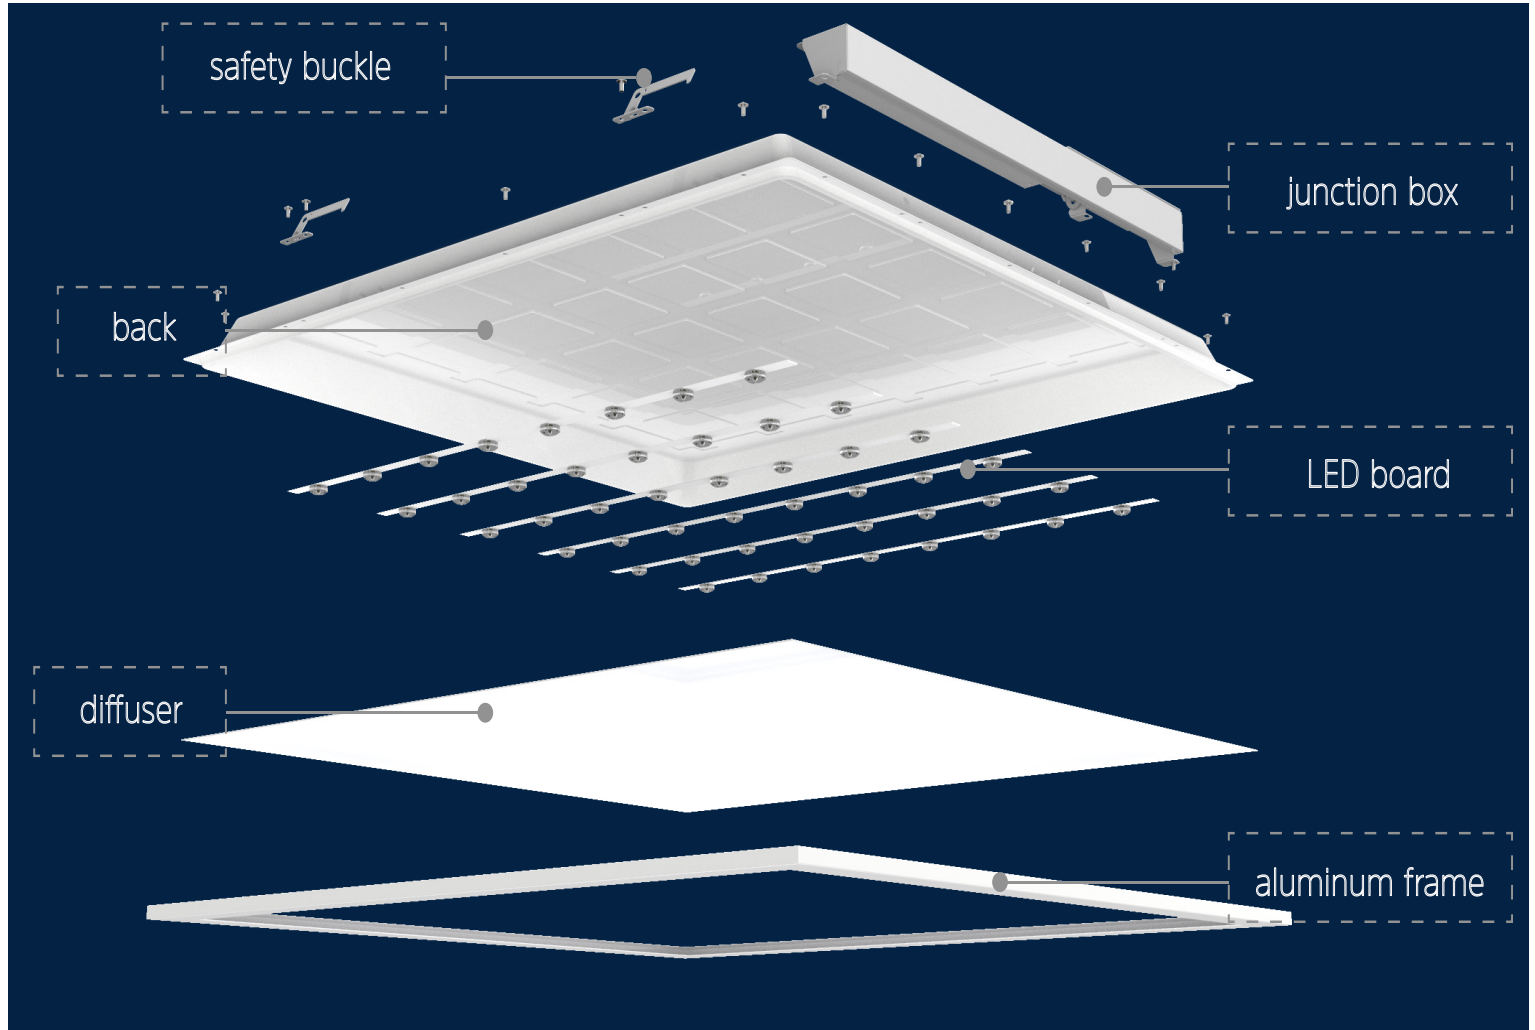

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	SHAPE	WATTAGE	CCT	ADDITIONAL OPTIONS
ILPLKPTB	2X2 - 2' X 2'	30W - 30W	30 - 3000K	DM - 1-10V DIMMING
	2X4 - 2' X 4'	32W - 32W	35 - 3500K	DD - DALI DIMMABLE DRIVER
		36W - 36W	40 - 4000K	EM - EMERGENCY BACKUP
		40W - 40W	50- 5000K	SM - SURFACE MOUNTING
		44W - 44W	CCT- CCT TUNABLE*	
		50W - 50W		
		WT - WATT SELECTABLE*		

SAMPLE ITEM NUMBER: ILPNLKPTB 2X2 32W 30 DM

*WT & CCT NOT COMPATIBLE WITH DDM DRIVER

Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277V
- **CRI:** >90
- **Operating Temperature:** -4°F ~ 104°F
- **L70 Lifetime:** >50,000 hours.

Controls:


- This LED fixture is equipped with 1-10V dimming that works universally with any standard 0-10V control or dimmer.

Optical System:


- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.




Product Dimensions:

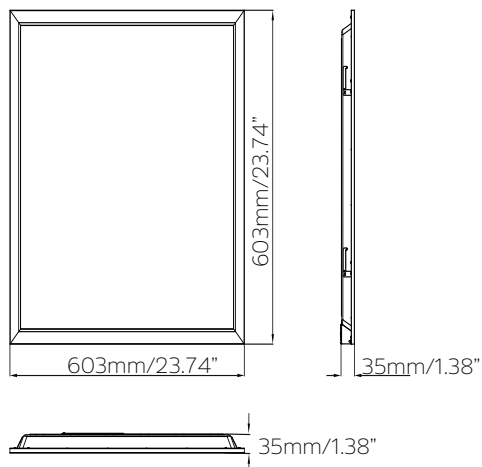

2 x 2 FT

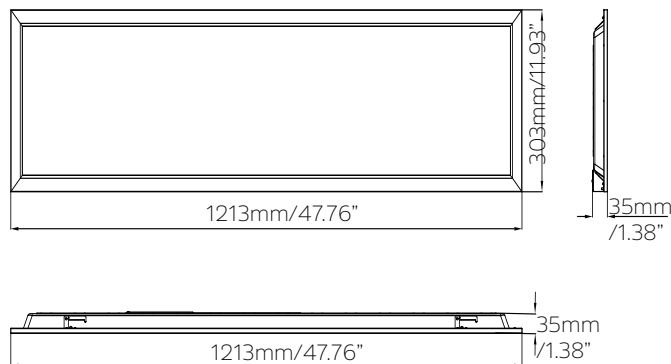

1 x 4 FT

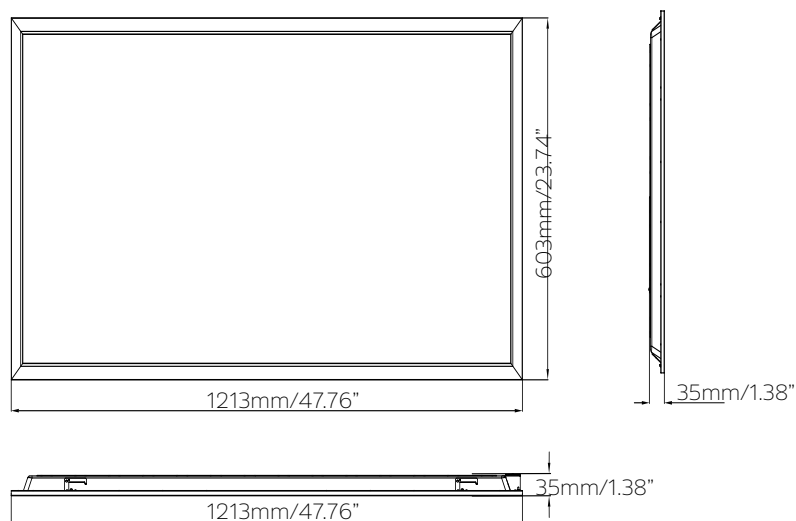

2 x 4 FT

