


Date:	_____
Project:	_____
Price:	_____

360° Elliott LED Pendant:

Our 360° Elliott LED Pendant is a one of a kind fixture that can be easily suspended and linked to create various shapes. This pendant is widely used in offices, hotels, schools, and residential applications.

Features:

- Mounting: Suspended.
- 100 LM/W
- 1-10V dimmable option.
- Lighting control options available.
- Construction: Die-cast aluminum housing.
- Finish: White/ Black powder coating or Gray Electrostatic spraying finish.
- L70 Lifetime: >50,000 hours
- CRI >90
- Available color options: 3000K, 4000K, 5000K
- UL Listed: Suitable for damp locations. Recommended for indoor use only.
- Voltage: 220V-240V/50-60Hz or 100V-270V/50-60Hz
- Beam angle: 360°
- 7 Year Warranty.

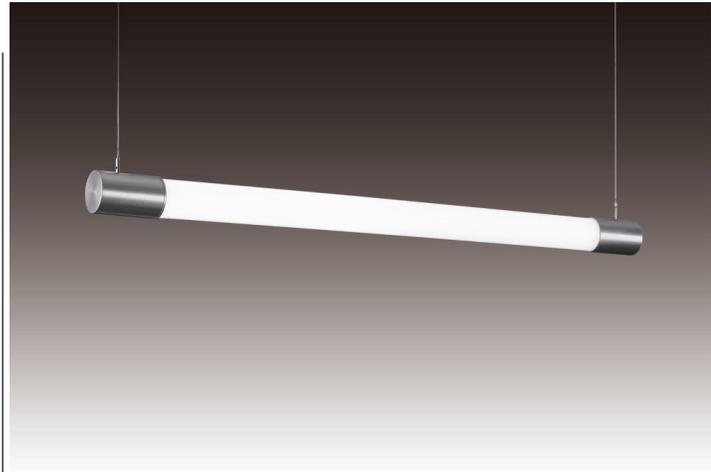


Applications:

- Offices
- Hotels
- Schools
- Residential



Dimensions:

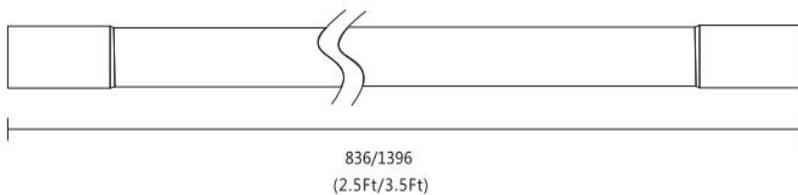

Date:	_____
Project:	_____
Price:	_____

Ordering Key:

SERIES NUMBER	WATTS / SIZE / LUMENS	CCT	FINISH	VOLTAGE	ADDITIONAL OPTIONS
ILPF3EBX	18w - 32.9IN / 1,800	3 - 3000K	W - WHITE	100 - 100V-270V	DIM - 1-10V DIMMING
	36w - 54.9IN/ 3,600	4 - 4000K	BL - BLACK	220 - 220V-240V	EM - EMERGENCY BACKUP
		5 - 5000K	G - GRAY		

SAMPLE ITEM NUMBER: ILPF3EBX 36 4 BL 100 DIM

Controls:

- This LED fixture is equipped with 1-10V dimming that works universally with any standard 1-10V control or dimmer.

Electrical Data:

- Input Power: Stays consistent over life.
- Input Voltage: 220V-240V/50-60Hz or 100V-270V/50-60Hz
- Operating Temperature: -4°F ~ 40°F
- CRI: >90
- L70 Lifetime: >50,000 hours.


Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.



Date:	_____
Project:	_____
Price:	_____

Photometrics:

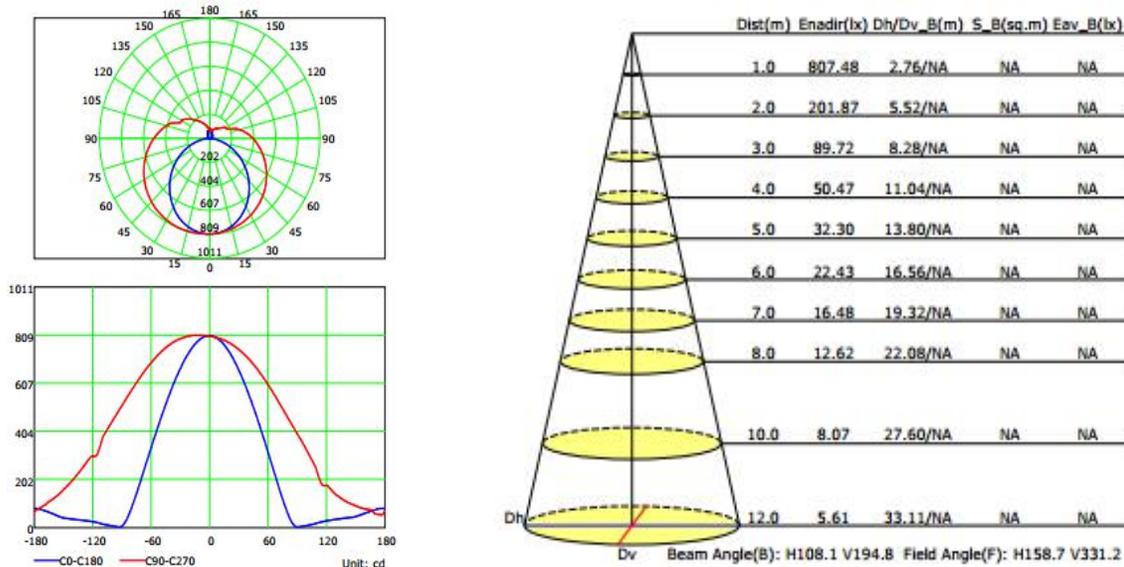

Listings:

- UL Listing Suitable for damp locations. Recommended for indoor use only.
- CE Test Standard EN 60598-2-2:2012 / EN60598-1:2015 / EN55015:2013/A1:2015 / EN61547:2009 / EN61000-3-2:2014 / EN61000-3-3:2013 / EN60598-2-1:1989 / EN60598-1:2015+AC:2016
- RoHS Test Standard EN62321:2009 /
- IESNA LM-79 & LM-80 Fixture has been tested by an independent laboratory in accordance with Testing IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

Notes:

- Additional lower light levels available. Please consult factory for specific details.
- Not all ceiling types are shown; consult factory for specific ceiling types not listed.
- All lengths are nominal. Refer to submittal drawings for actual sizes.
- Not all dimming options available for every length; please consult factory for specific details.
- For configurable runs specify length to nearest foot. Standard runs ship in 12ft increments. Ensure to specify 8ft increments if 12ft are too large to receive. Additional charges may apply; please consult factory for details.
- Battery pack options are not available in every length; please consult factory for specific details. Battery pack is remote installation only.
- For all options; consult factory for specific requirements.
- Integrated sensor available with LED driver options ED, DD, and HCD

