



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date: \_\_\_\_\_  
Project: \_\_\_\_\_  
Price: \_\_\_\_\_

## Prospect Gooseneck Light

### Description:

Our LED Prospect Gooseneck Light is rated for wet locations and is a great addition to any indoor or outdoor space. Its elegant curves will bring a rustic or industrial edge to your area. Available finishes in Bronze, Black, Red, Blue, or White. This fixture is ideal for entrance ways, corridors, balconies, and general wall lighting.

### Features:

- Input Power: AC120-277V 50/60Hz
- Wet location.
- Wattage: 25W or 40W.
- 120 LM/W
- CRI >80
- Available Color Options: 3000K, 4000K, 5000K or 5700K.
- Photocell
- 0-10V Dimming
- Finish: Red, White, Black, Bronze or Customized
- Adjustable head allowing 360° spin and 210° up and down.
- L70 Lifetime: >50,000 hours.
- 7 Year Warranty.




**40W**




**25W**



### Dimensions:

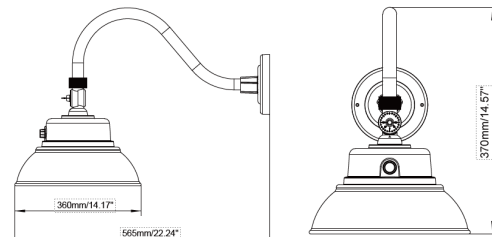

**40W**

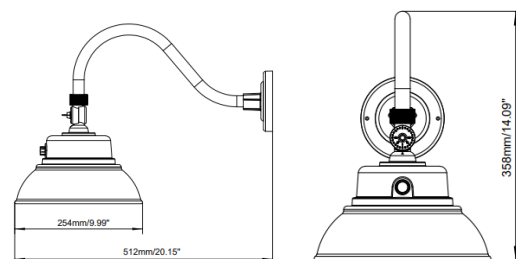

**25W**



## Ordering Key:

SERIES NUMBER	WATTAGE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILWLPGJG	25W - 25W/ 3,000 LM	3K - 3000K	R - BRONZE	DM - 0-10V DIMMABLE
	40W - 40W/ 4,800LM	4K - 4000K	B- BLACK	PC - PHOTOCELL
		5K - 5000K	W - WHITE	
		57K - 5700K	R - RED	

SAMPLE ITEM NUMBER: ILWLPGJG 25W 3K W DM PC

## Electrical Data:


- **Input Power:** Stays consistent over life.
- **Input Voltage:** AC 120-277V 50/60Hz
- **CRI >80**
- **L70 Lifetime:** >50,000 hours.

WATTAGES	LEDS	LED CURRENT	Current		
			120	240	277
25W	144	60mA	0.2	0.1	0.09
40W	192	50mA	0.33	0.16	0.14


## Installation:

- Easily mounts to a wooden post or pole using 2" lag screws, included. Compatible with 1-5/8" mounting arm.

## Photometric:

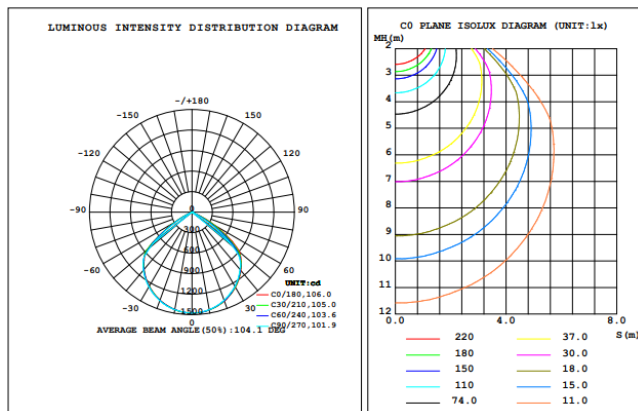

25W

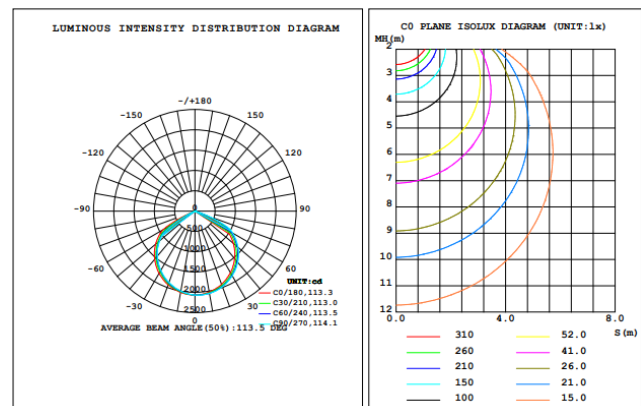

40W

