

# Nolita UV-GC Linear Fixture


## Description:

Our Nolita UV-GC Linear Fixture is a germicidal UVC up & LED Down light. Ideal for use in all settings where bacteria, virus, or mold can be exposed. Ideal for offices, supermarkets, and retail locations.


**Definition:** UV-GC lighting eliminates airborne bacteria & viruses through continual dosing and circulation of air throughout the room.

## Features:


- Wattage: Up UV : 40W(10W/ft) Down White light : 34W ( 8.5W/ft ) or Up UV : 78W(10W/ft) Down White light : 68W ( 8.5W/ft )
- Lumens: 4FT: Up UV: 300mw down White light: 3345-3465lm(836-866lm/ft) 8FT: Up UV: 600mw down White light: 6700-7105lm(836-866lm/ft)
- Germicidal rate: 99%
- Dimensions: 1380mm (4.53ft) X 55mm (0.18ft) X 80mm (0.26ft) or 2449mm(8.03ft)X55mm(0.18ft)X80mm(0.26ft)
- Voltage: 100-277VAC/50-60Hz
- Beam Angle: 96°
- Finish: Silver, White, or Black
- Construction: Cold-rolled steel Aluminum 6063
- CRI >90
- Additional Options: 0-10V, PWM and Resistor dimming solution.
- 2 Year Warranty.

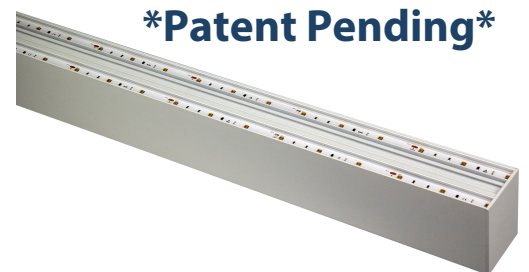

## Mounting:



Wall Mounted



Pendant Mounted

# Ordering Key:

| ILUVNUBV      |                     |           |            |                    |
|---------------|---------------------|-----------|------------|--------------------|
| SERIES NUMBER | WATTAGE / SIZE      | CCT       | FINISH     | OPTIONS            |
| ILUVNUBV      | 34W - 34D/40U / 4FT | 3 - 3000K | S - SILVER | DM - 0-10V DIMMING |
|               | 68W - 68D/78U / 8FT | 4- 4000K  | WH - WHITE |                    |
|               |                     | 6 - 6000K | BL - BLACK |                    |
|               |                     |           |            |                    |
|               |                     |           |            |                    |

# Dimensions:







## 4FT




## 8FT



# Photometrics:



## Additional Accessories:



- Pendant



IL-PTB



IL-PT



IL-PTS



IL-PFS



- Wall mounted



IL-WM

IL-PTB: pendant wires with canopy


IL-PT: pendant wires without canopy

IL-PTS: pendant wire + canopy without cable hole

IL-PFS: pendant wire + canopy with cable hole

IL-WM: wall mounted clip

## Disassembly Tools:

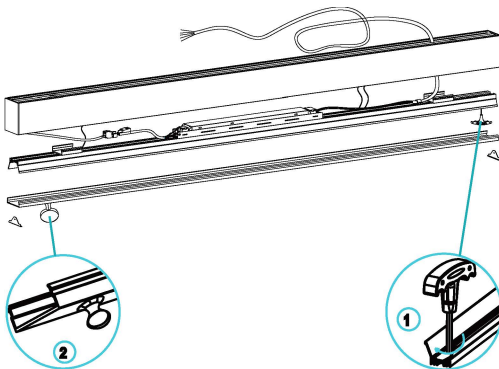

IL-DD



IL-DA

IL-DD: disassembly tool

L-D: Rubber sucker

